

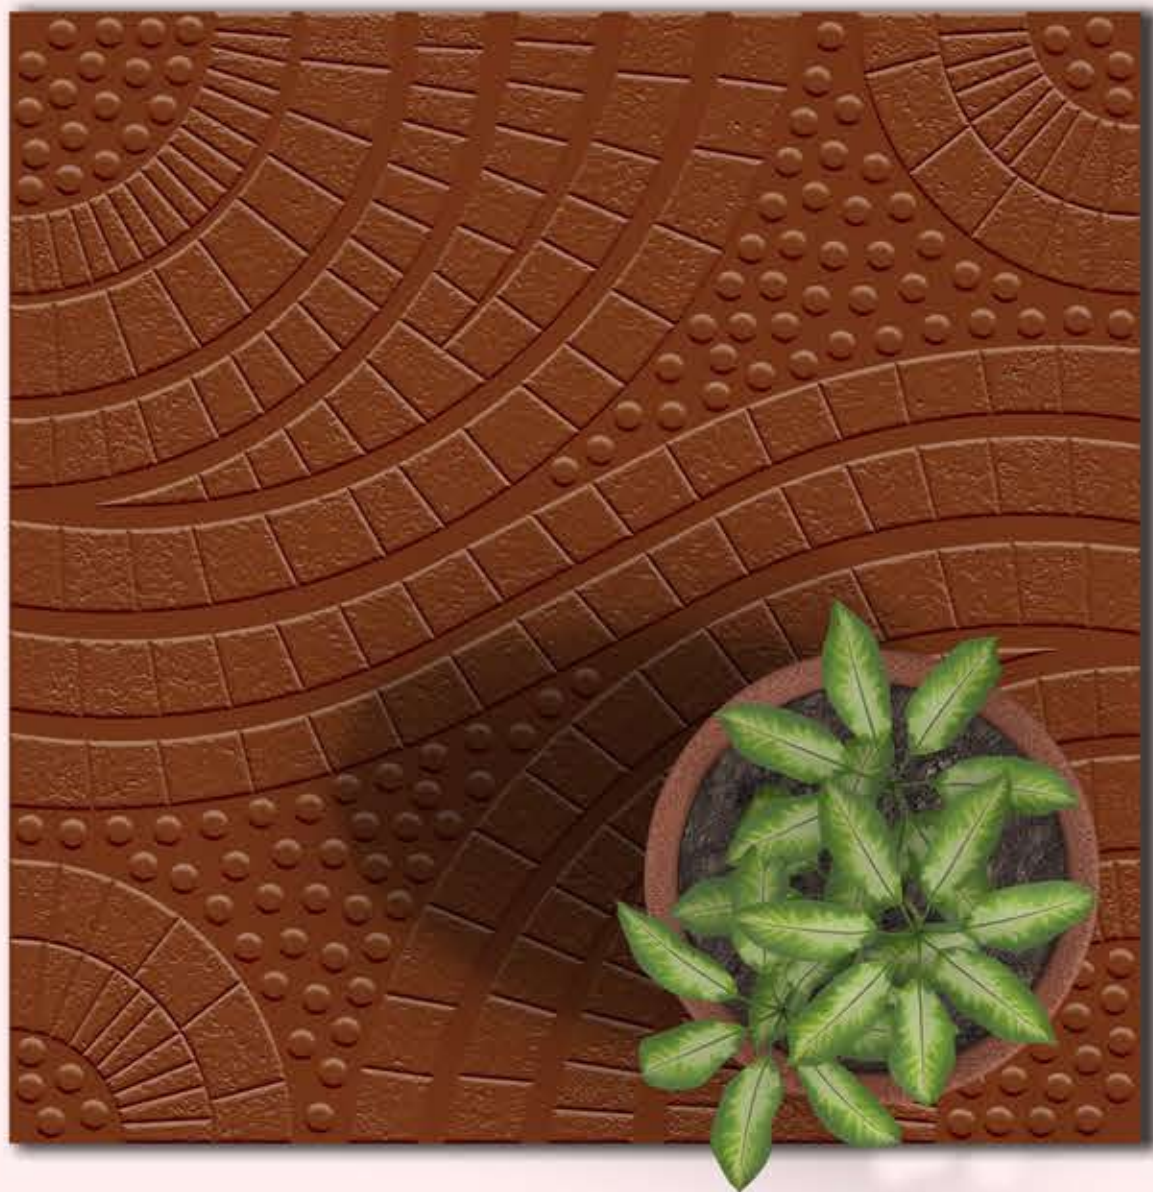


**FOTIA**<sup>TM</sup>  
CERAMICA

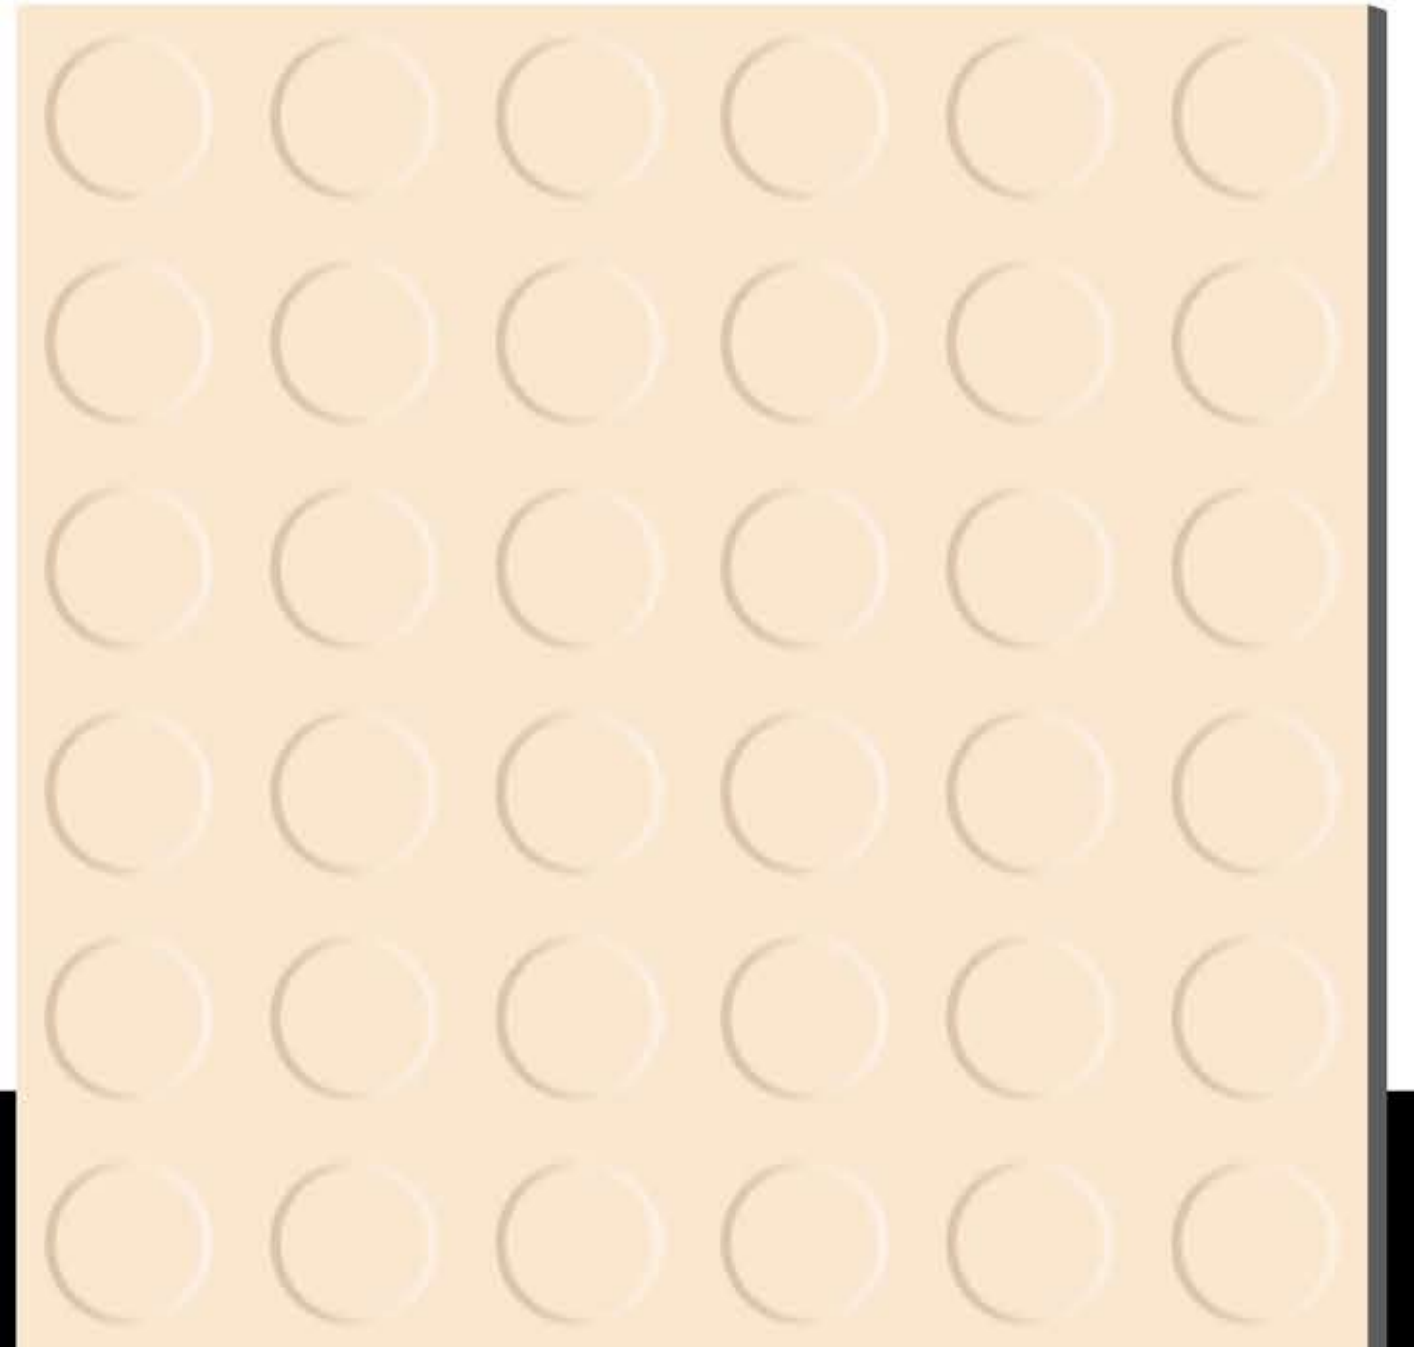



**IVORY & TERRACOTTA  
COLLECTION 2022**

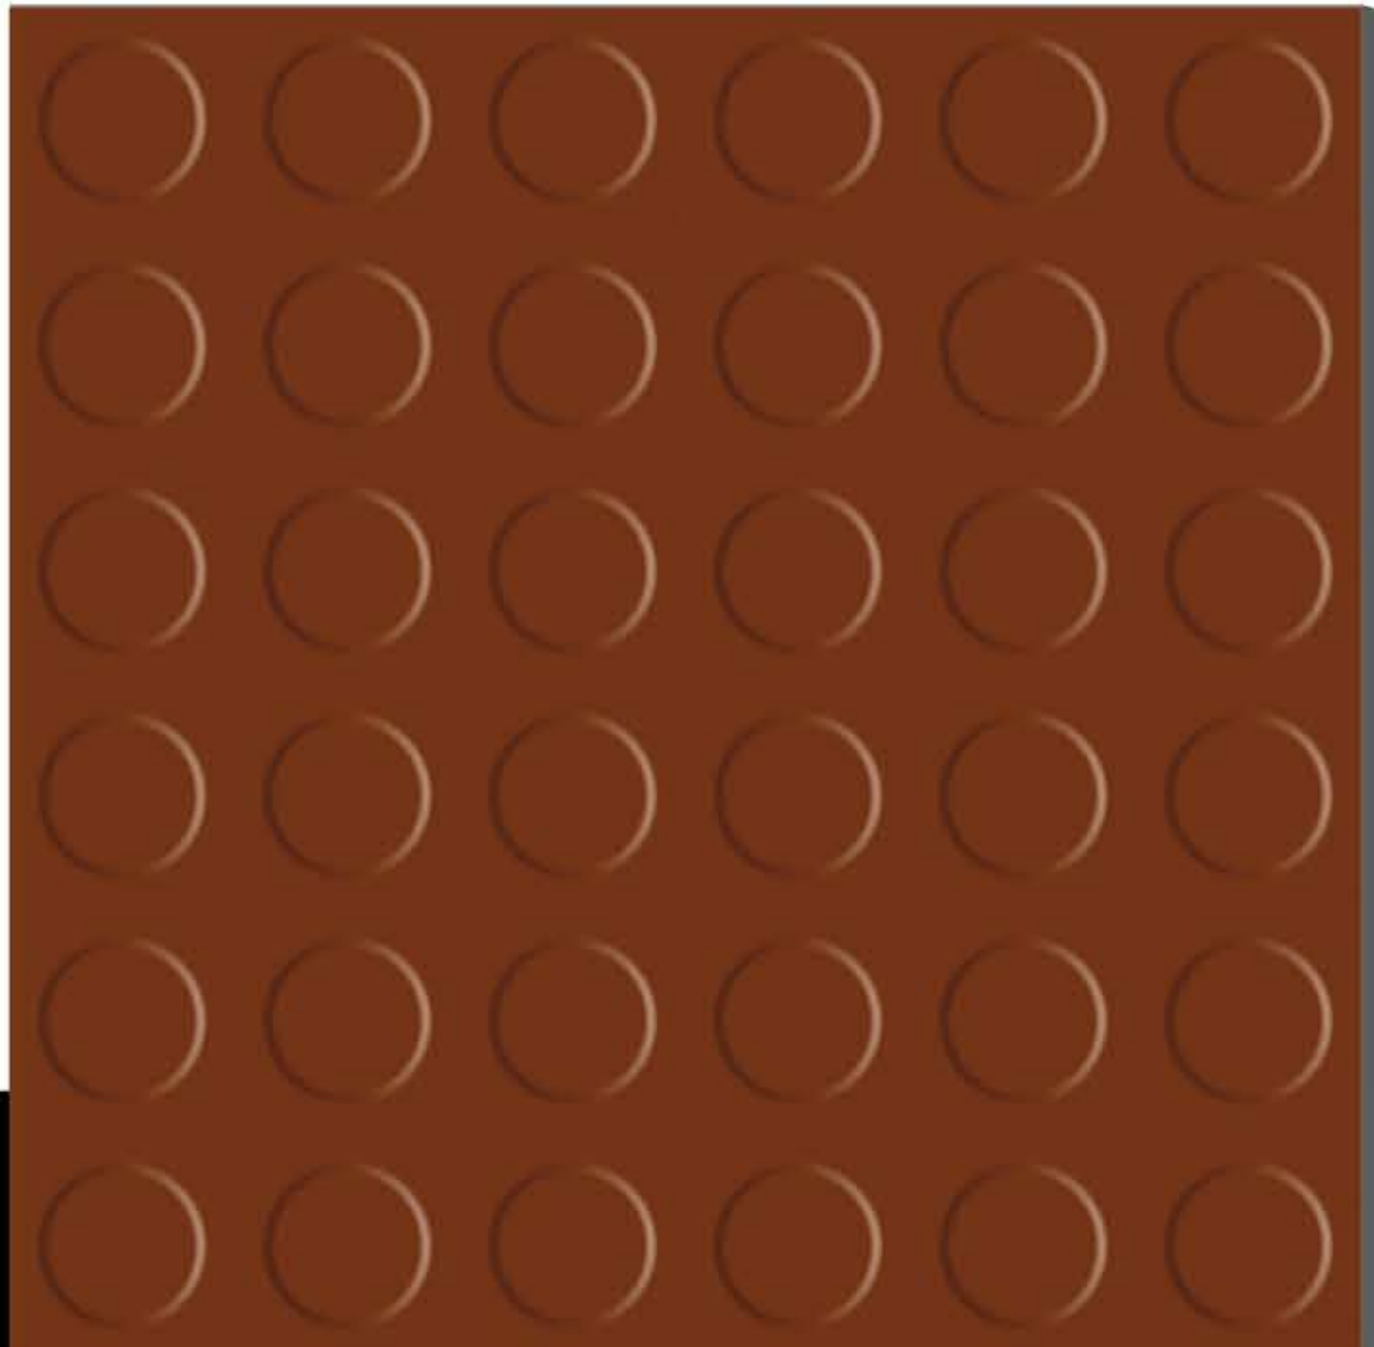

MATT  
300x300mm  
IVORY, TERRACOTTA

951



952

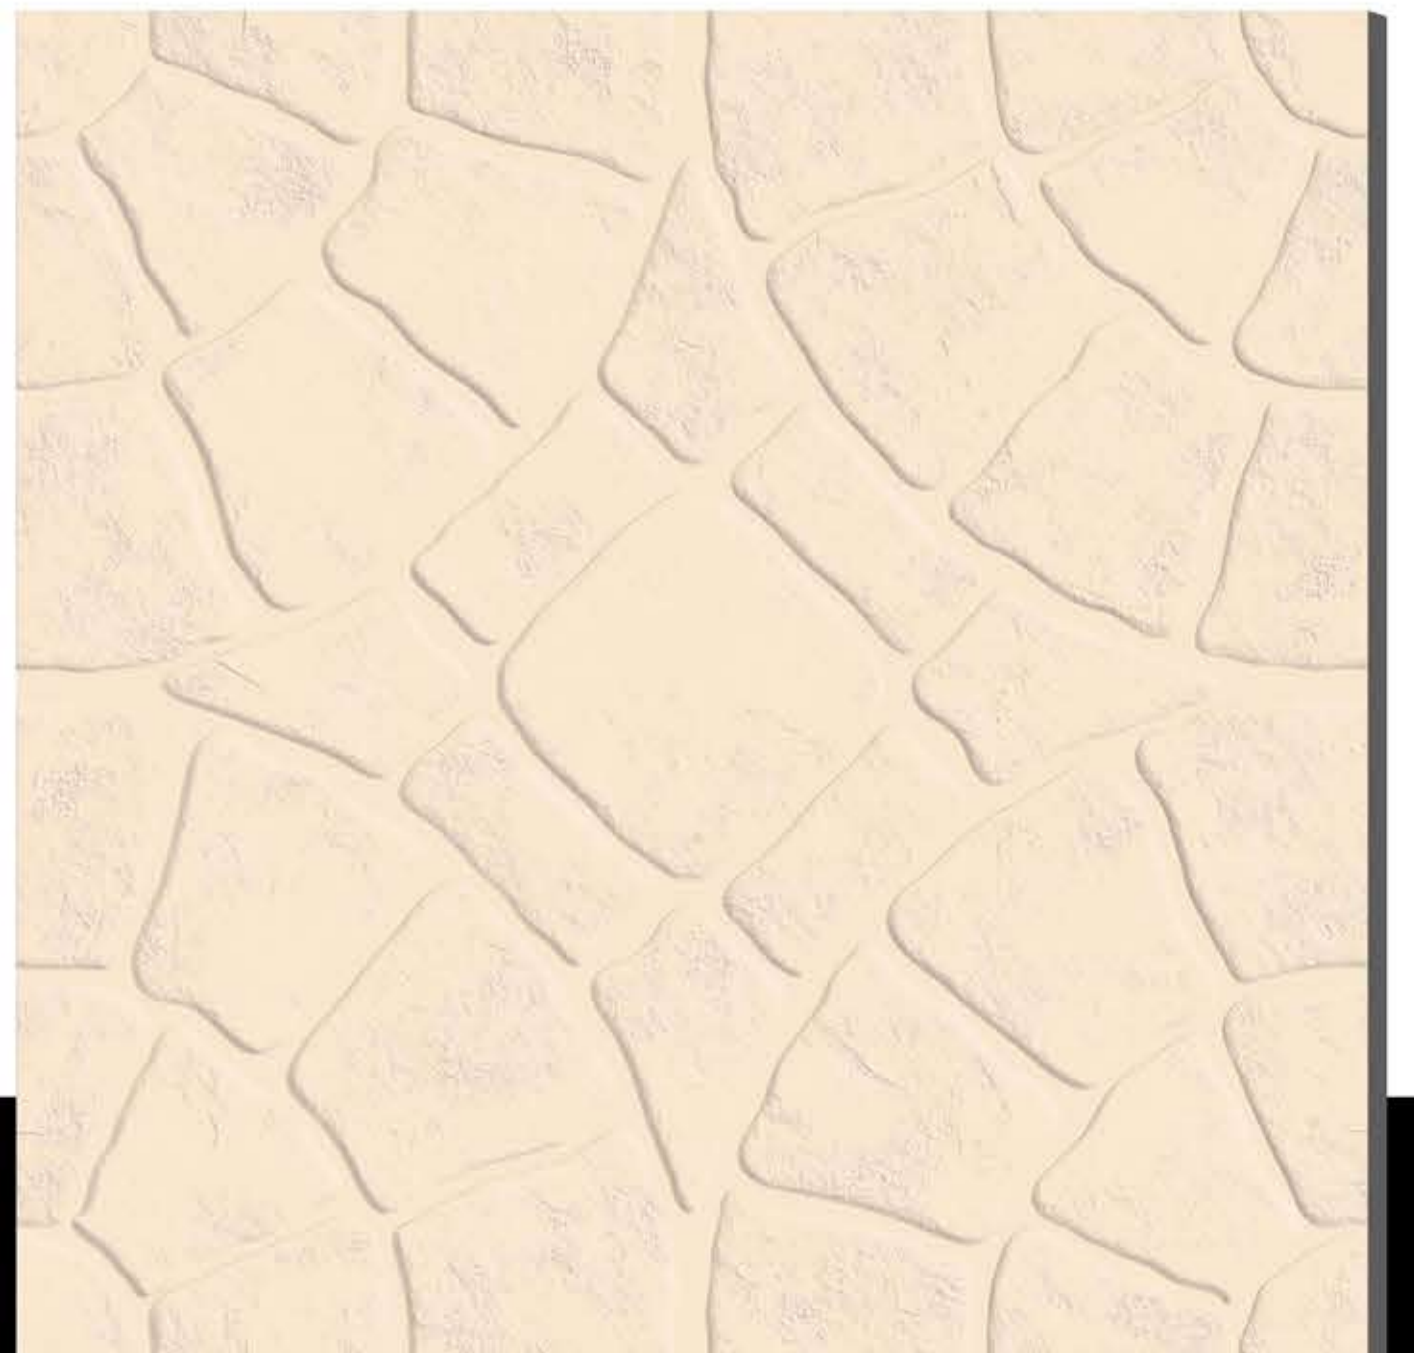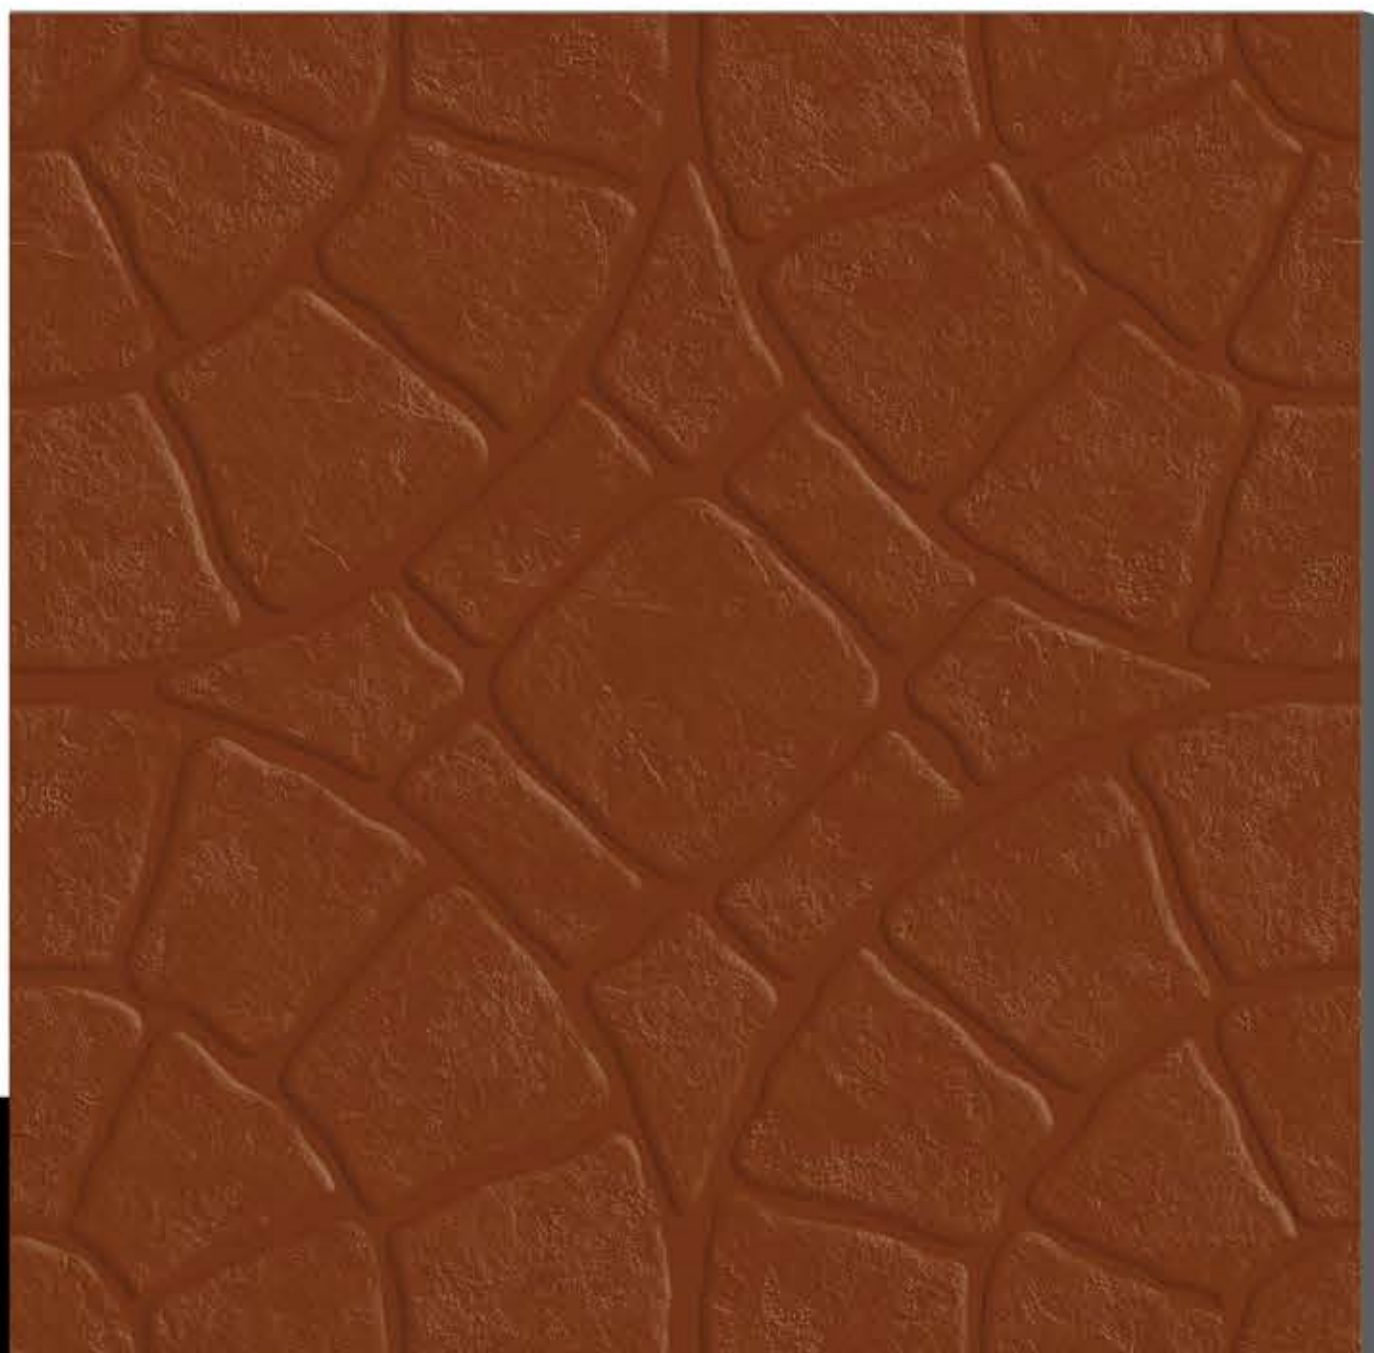

MATT  
300x300mm  
IVORY, TERRACOTTA

953




954

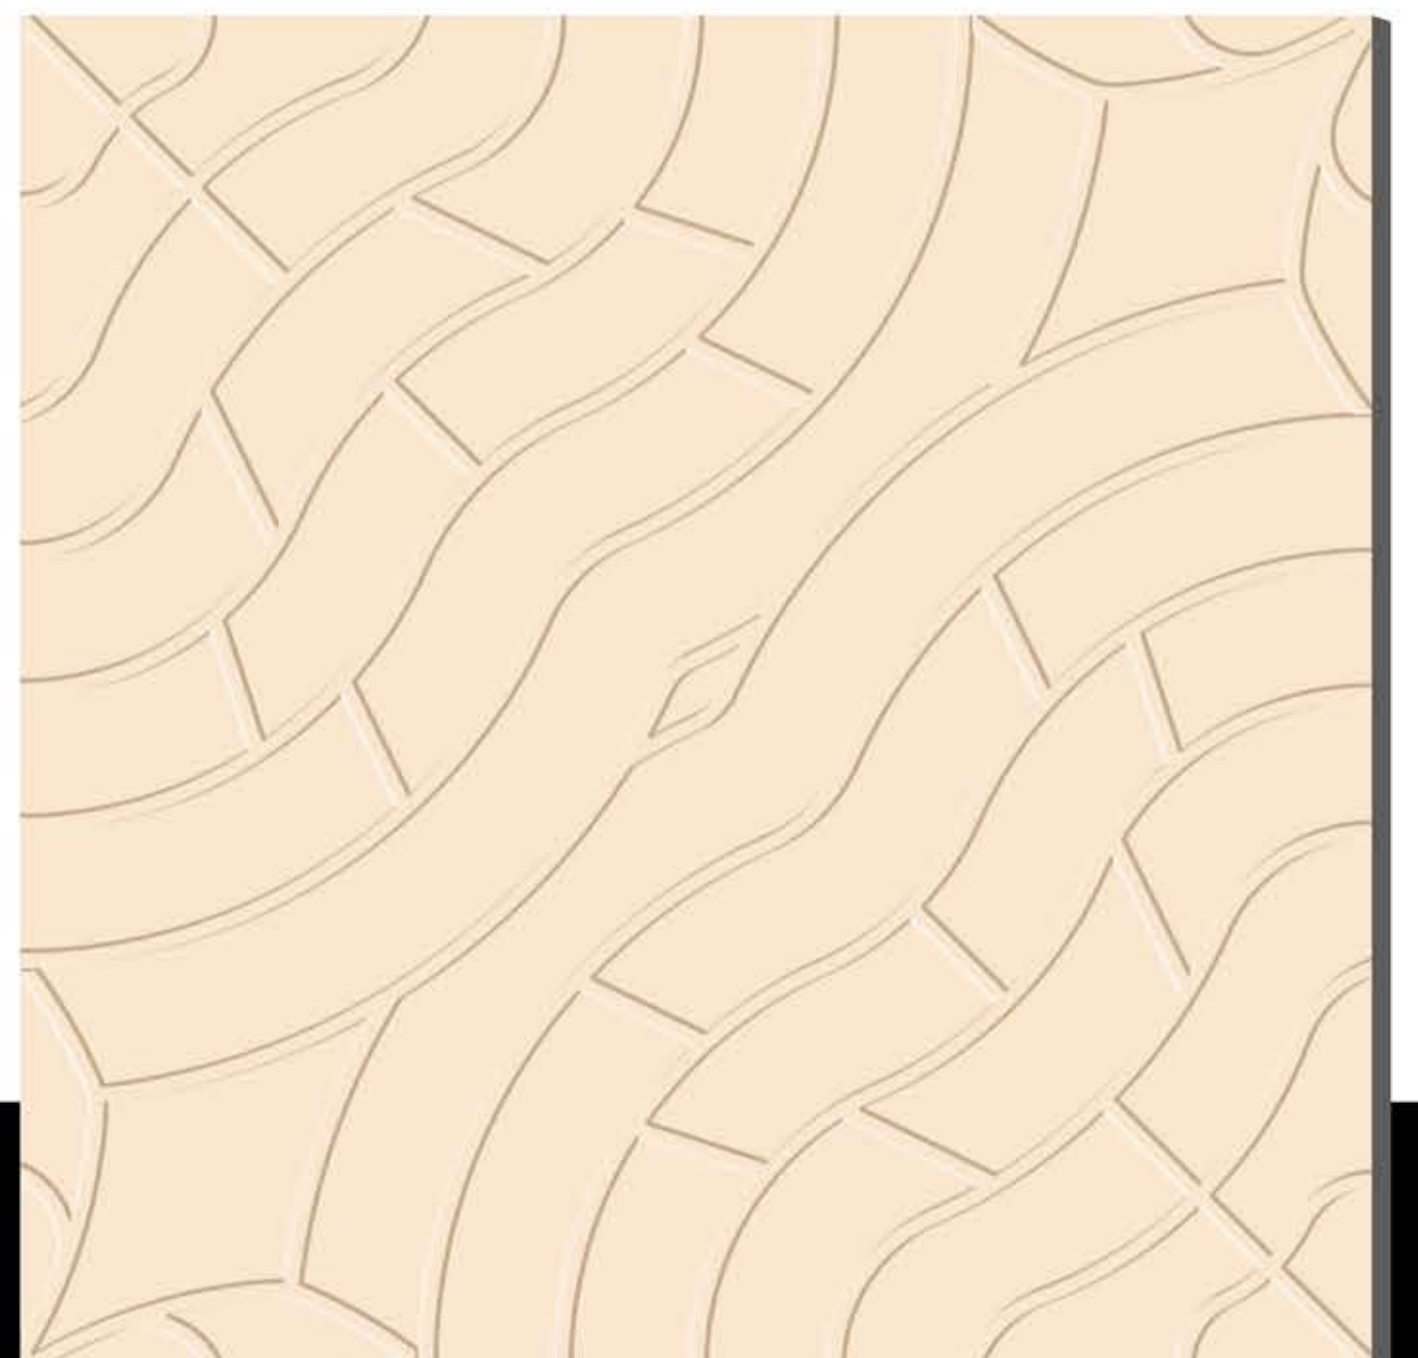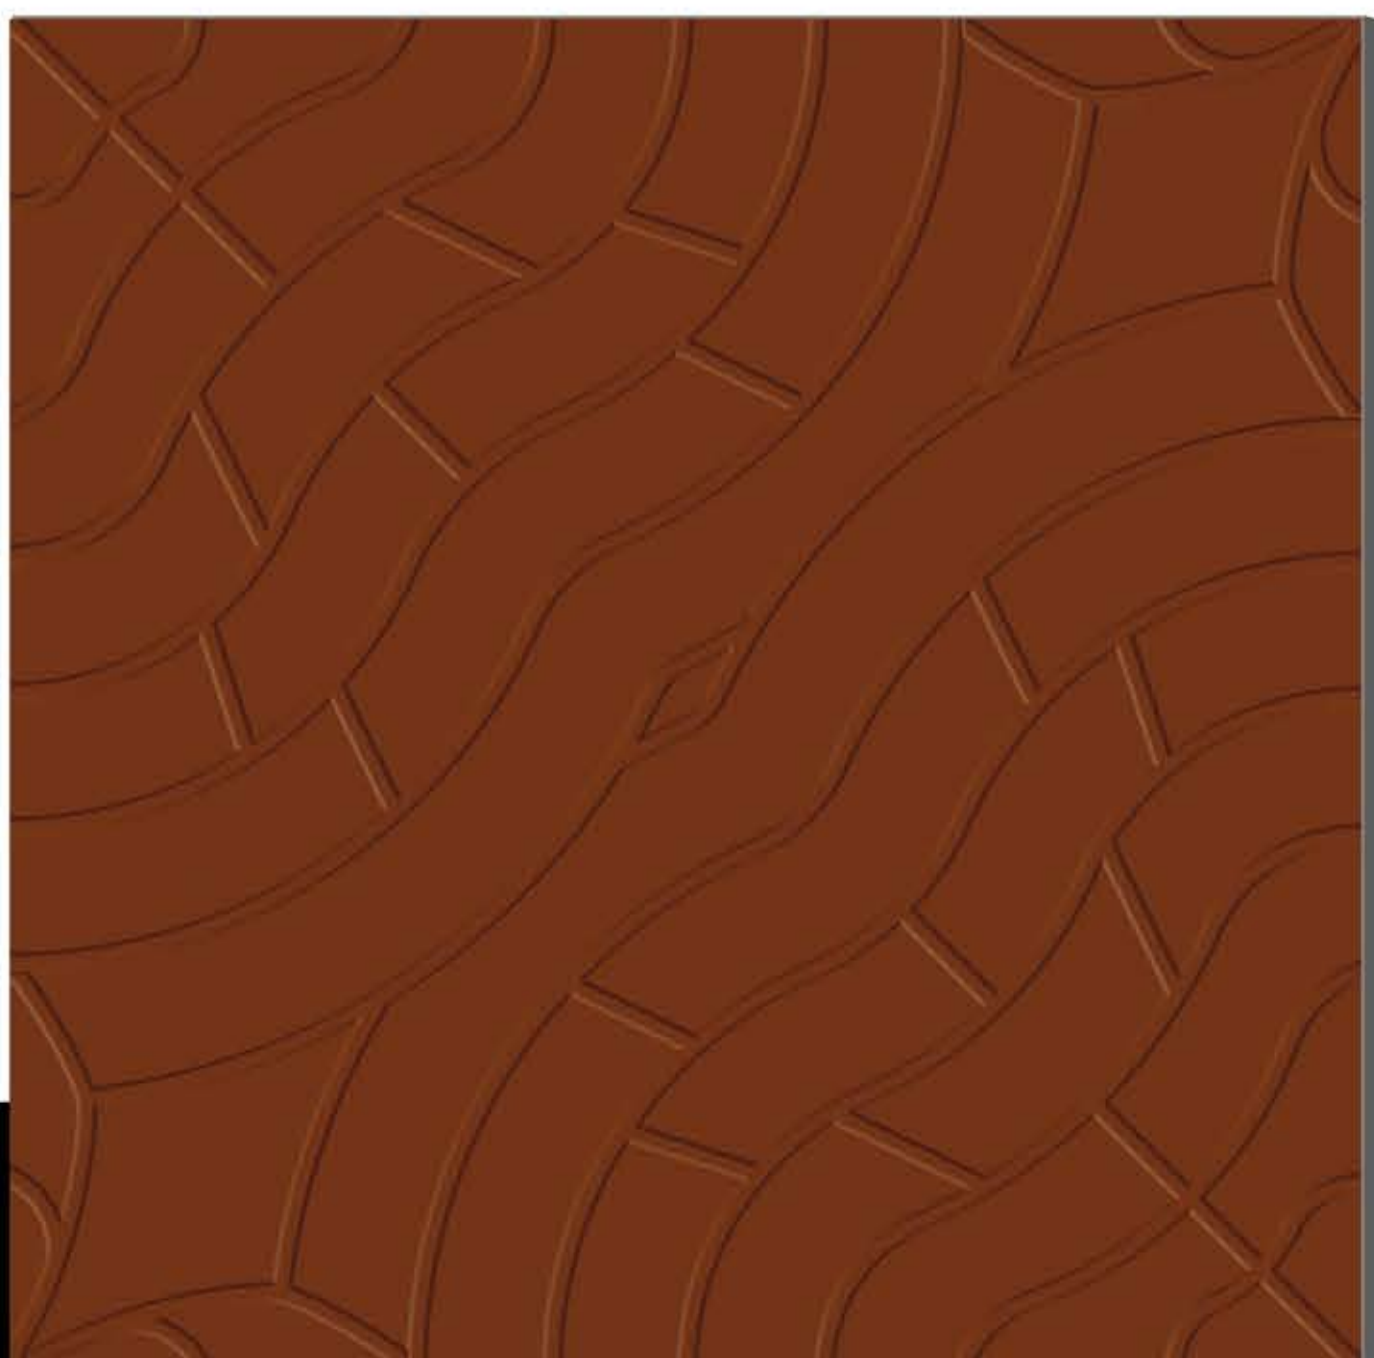

**MATT**  
**300x300mm**  
**IVORY, TERRACOTTA**

**955**



**956**

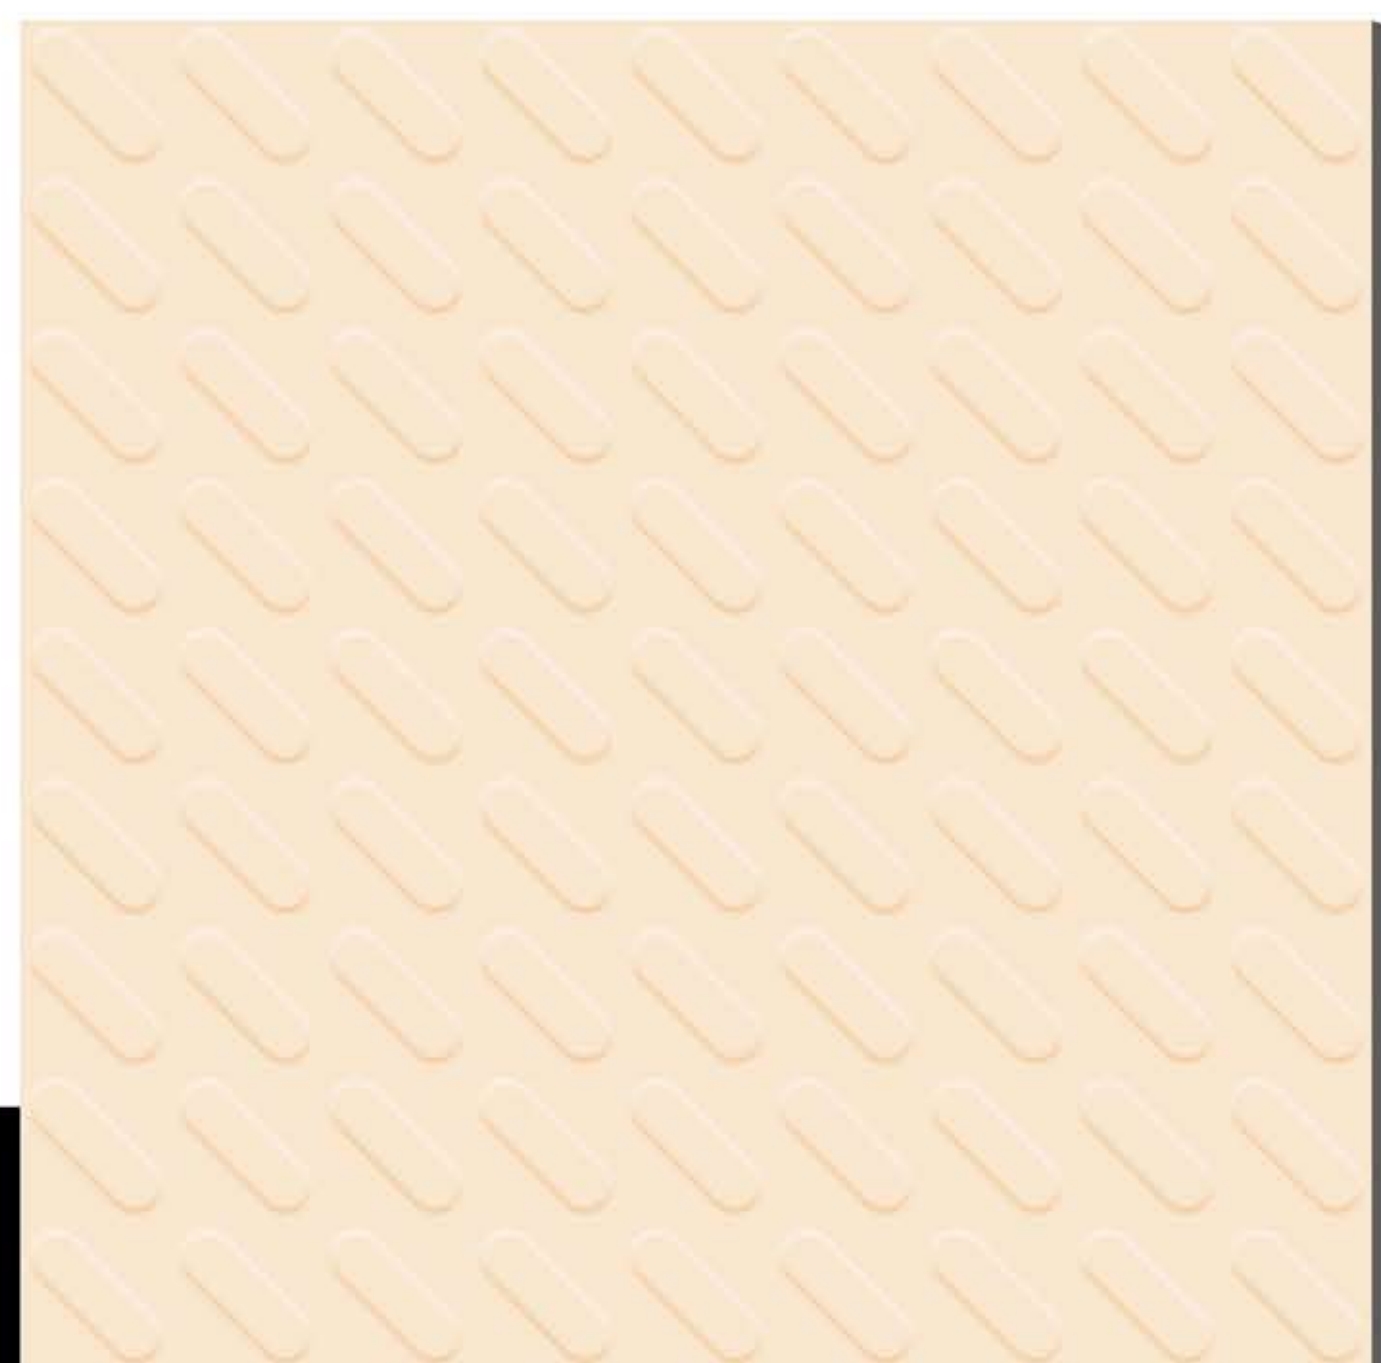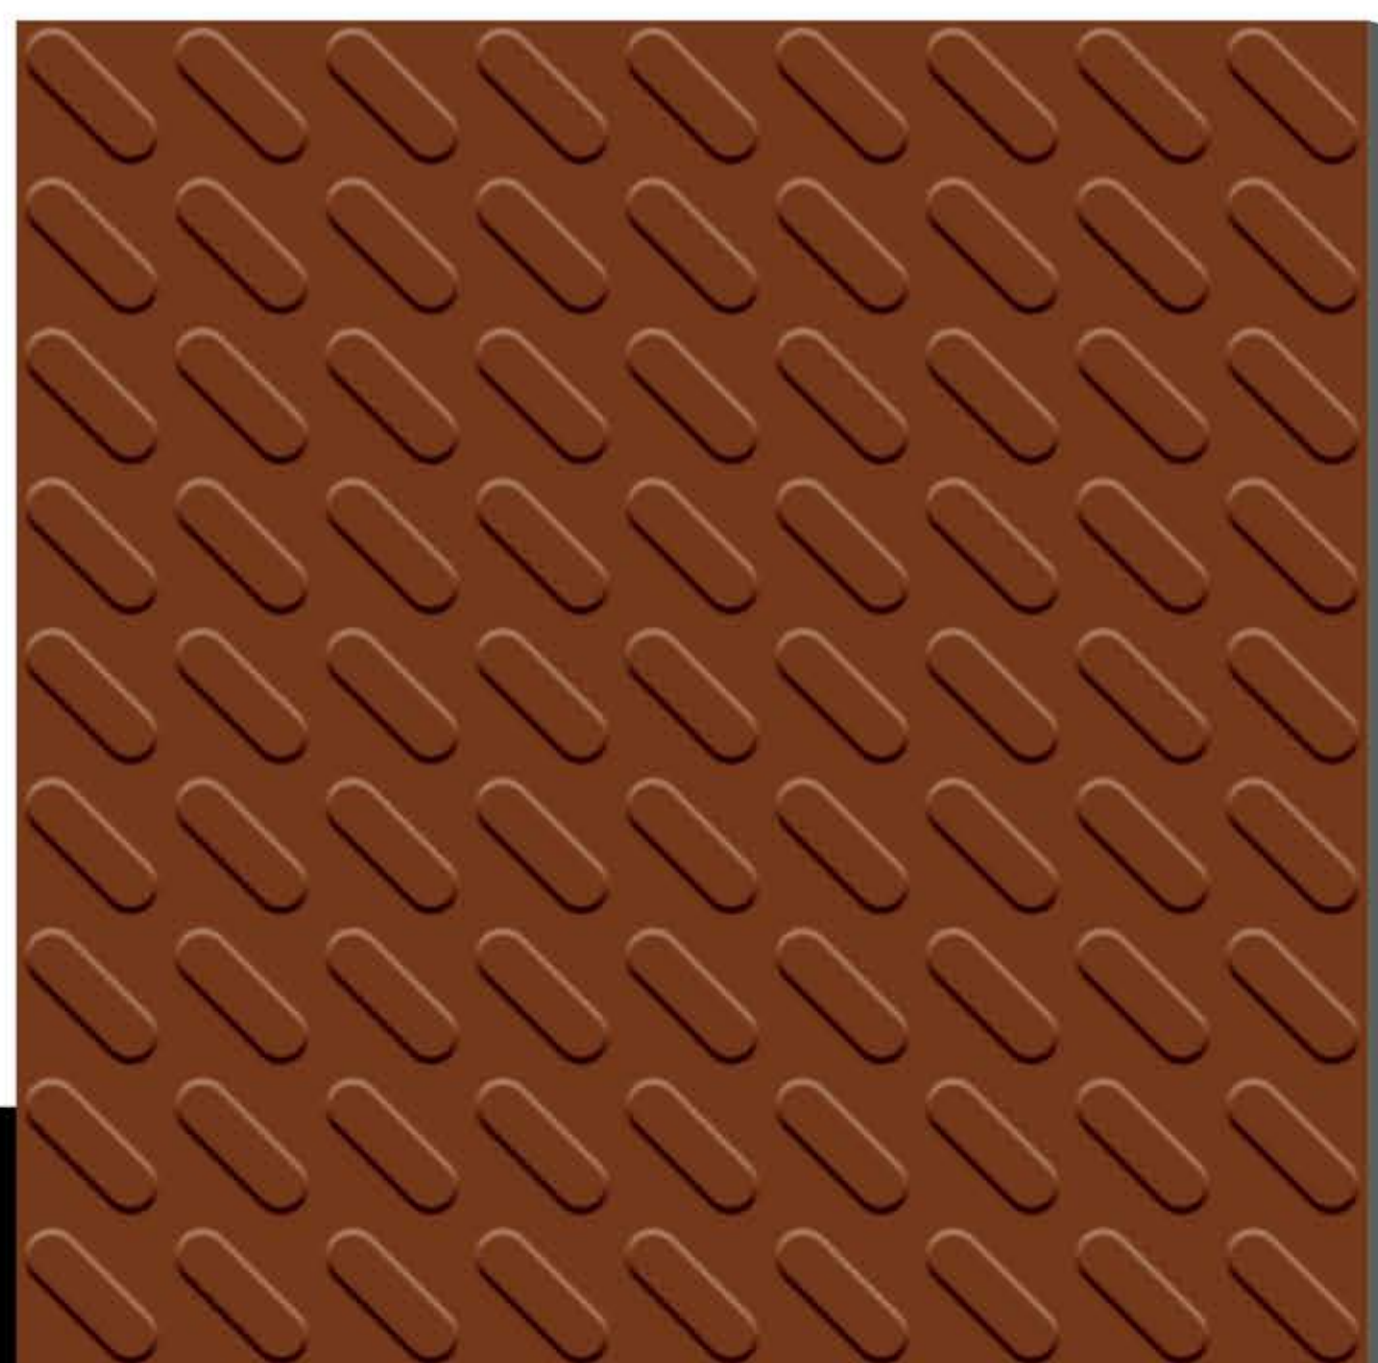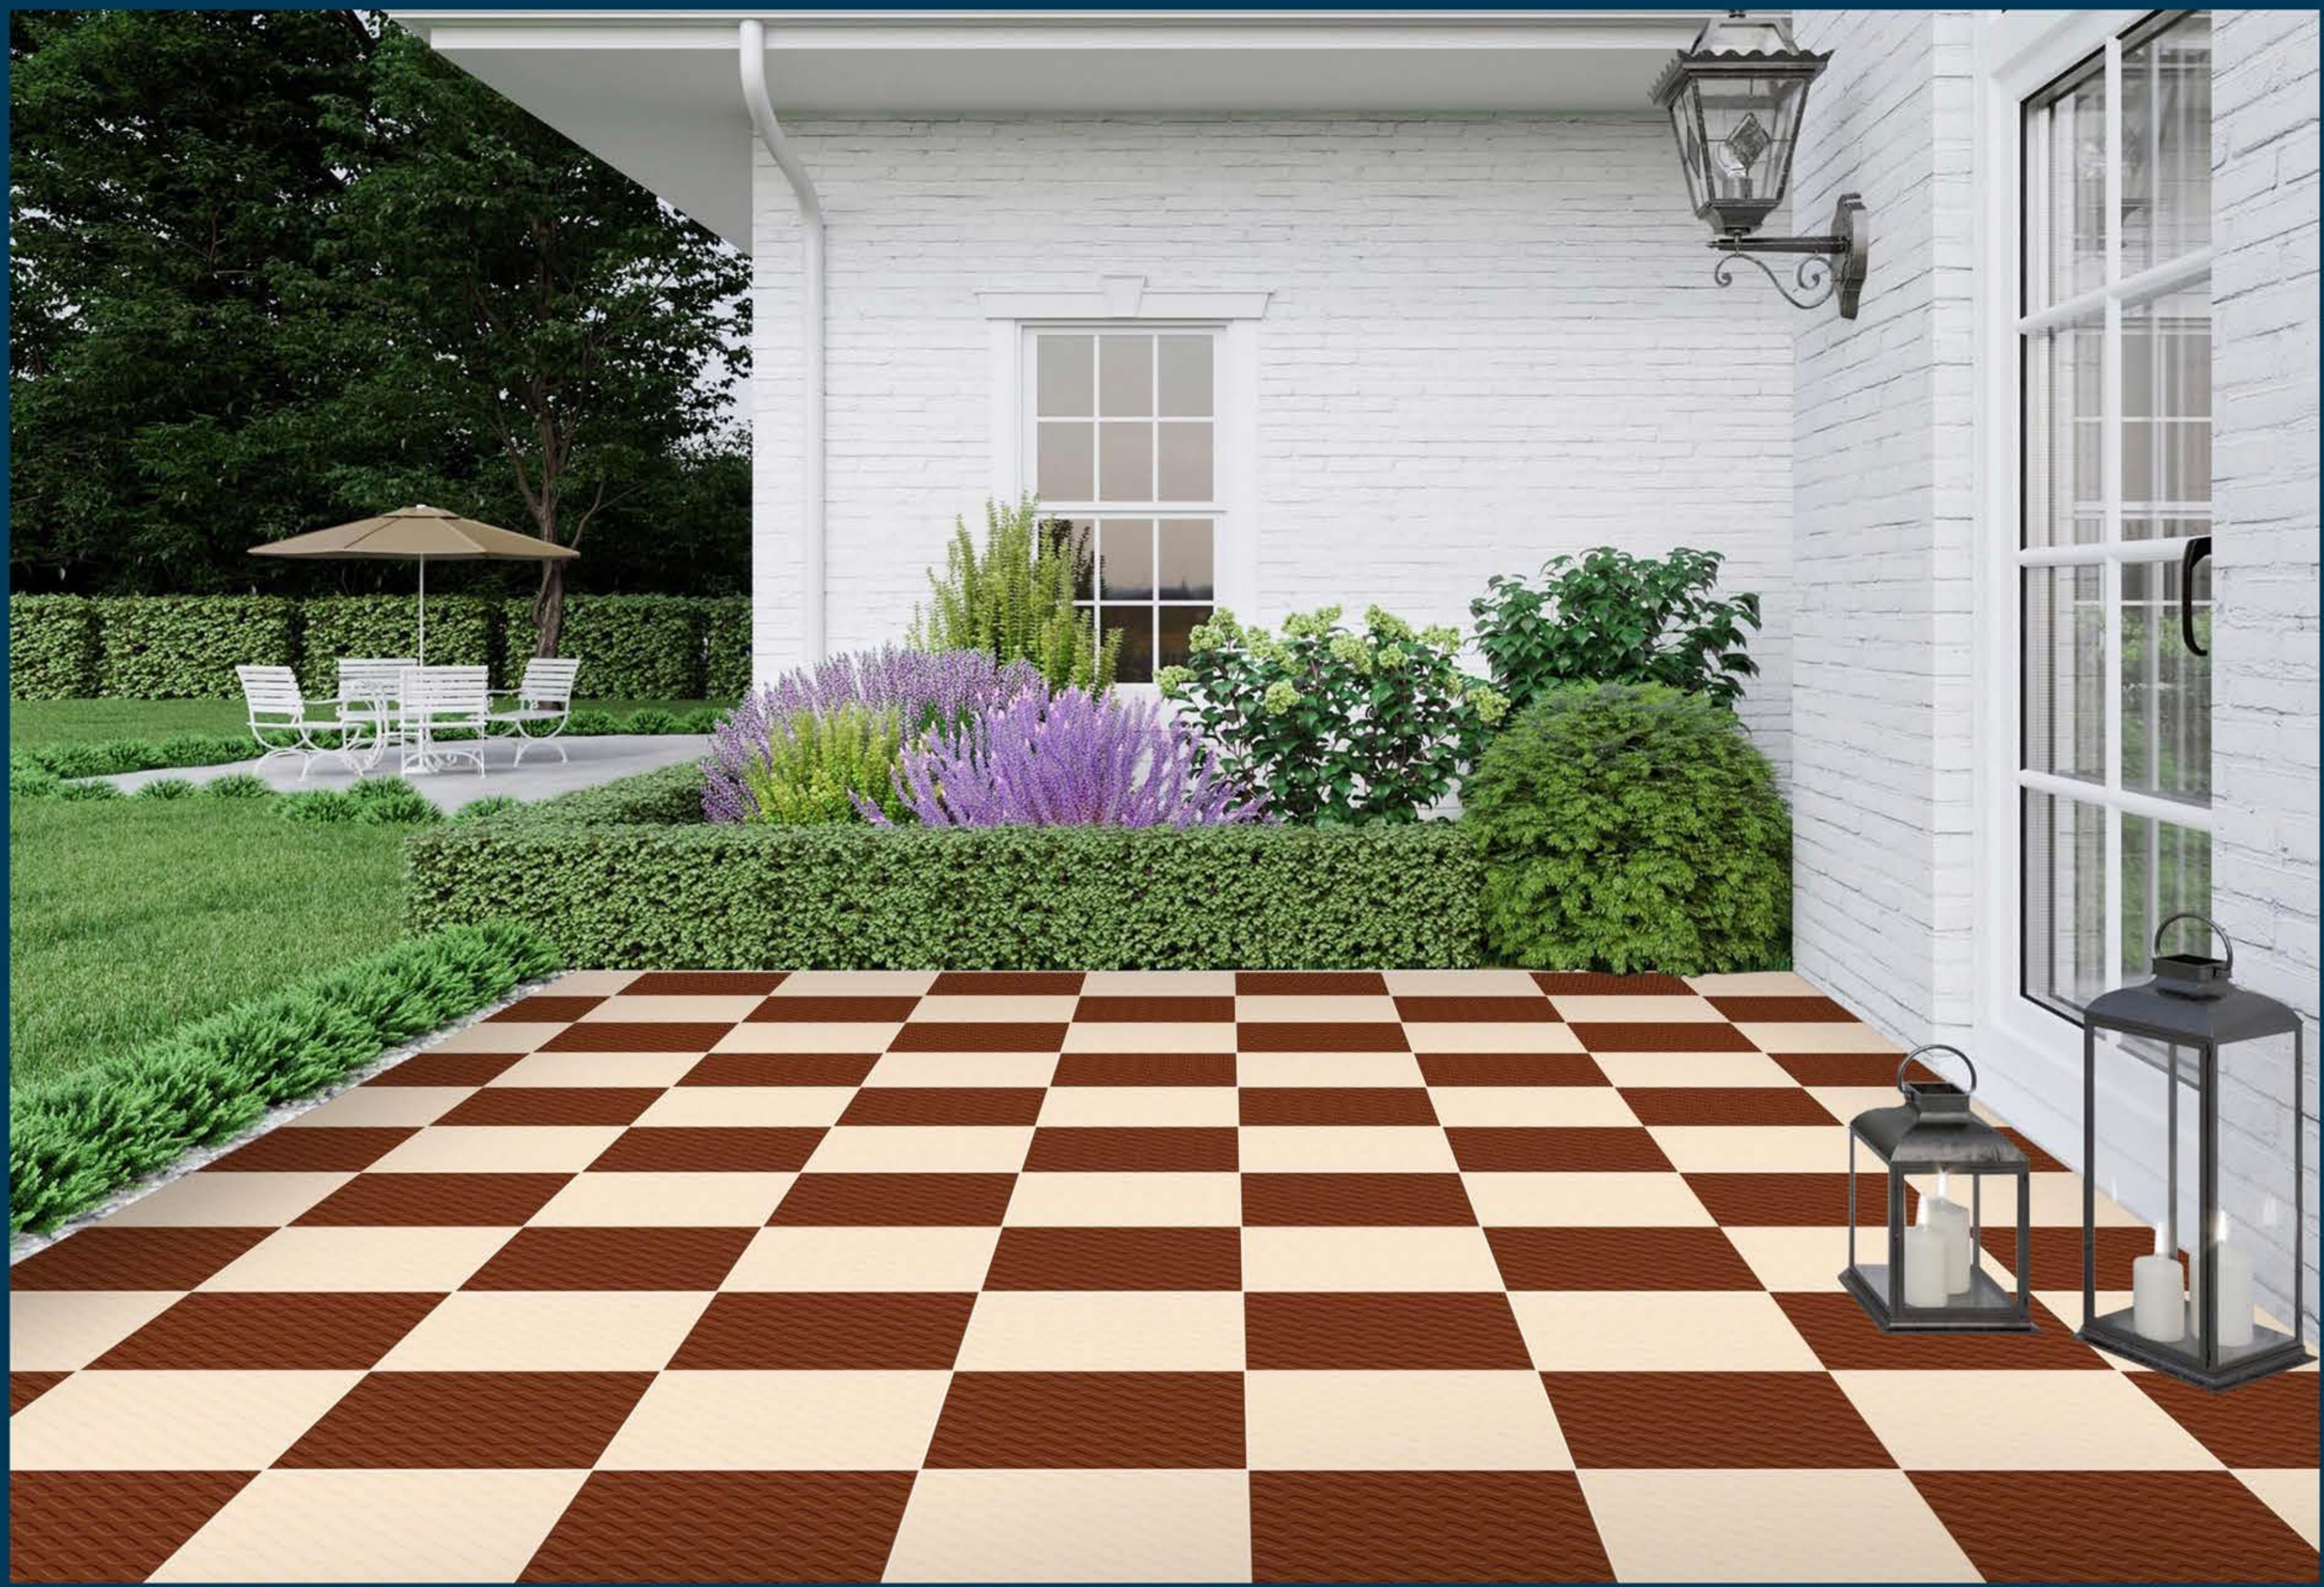

**MATT**  
**300x300mm**  
**IVORY, TERRACOTTA**

**957**



**958**

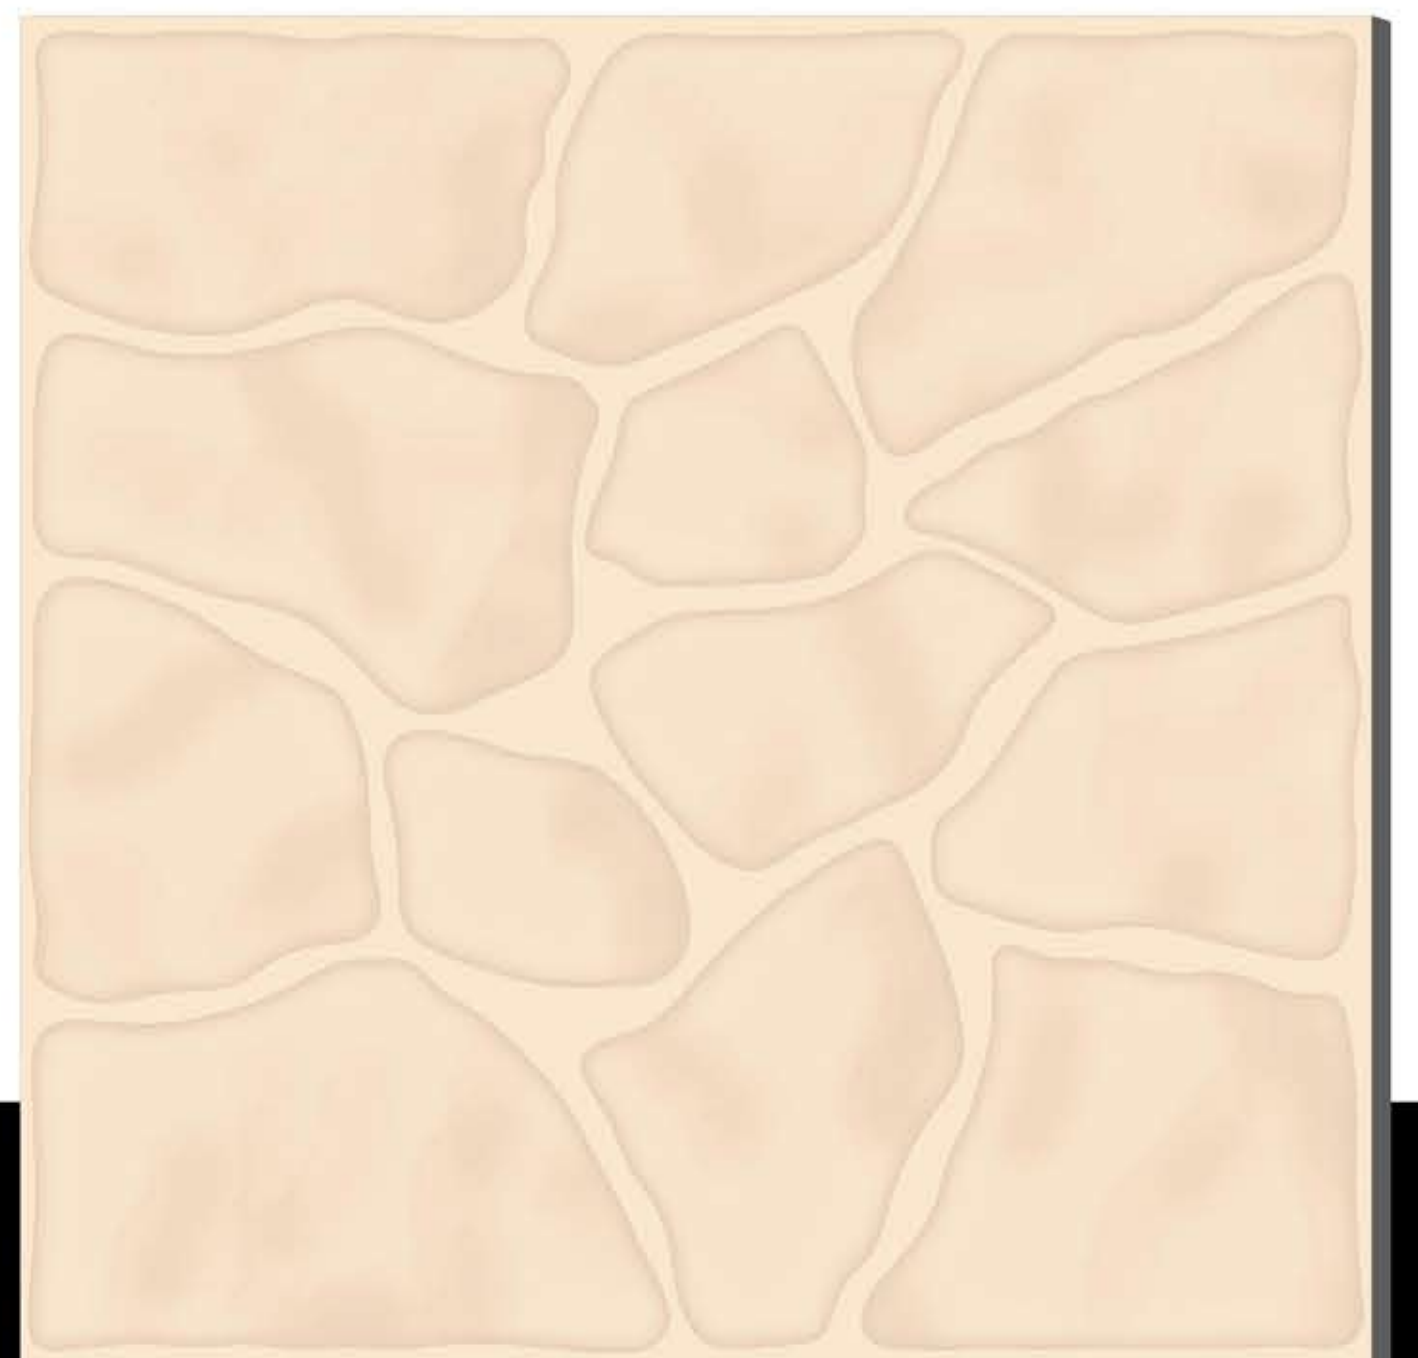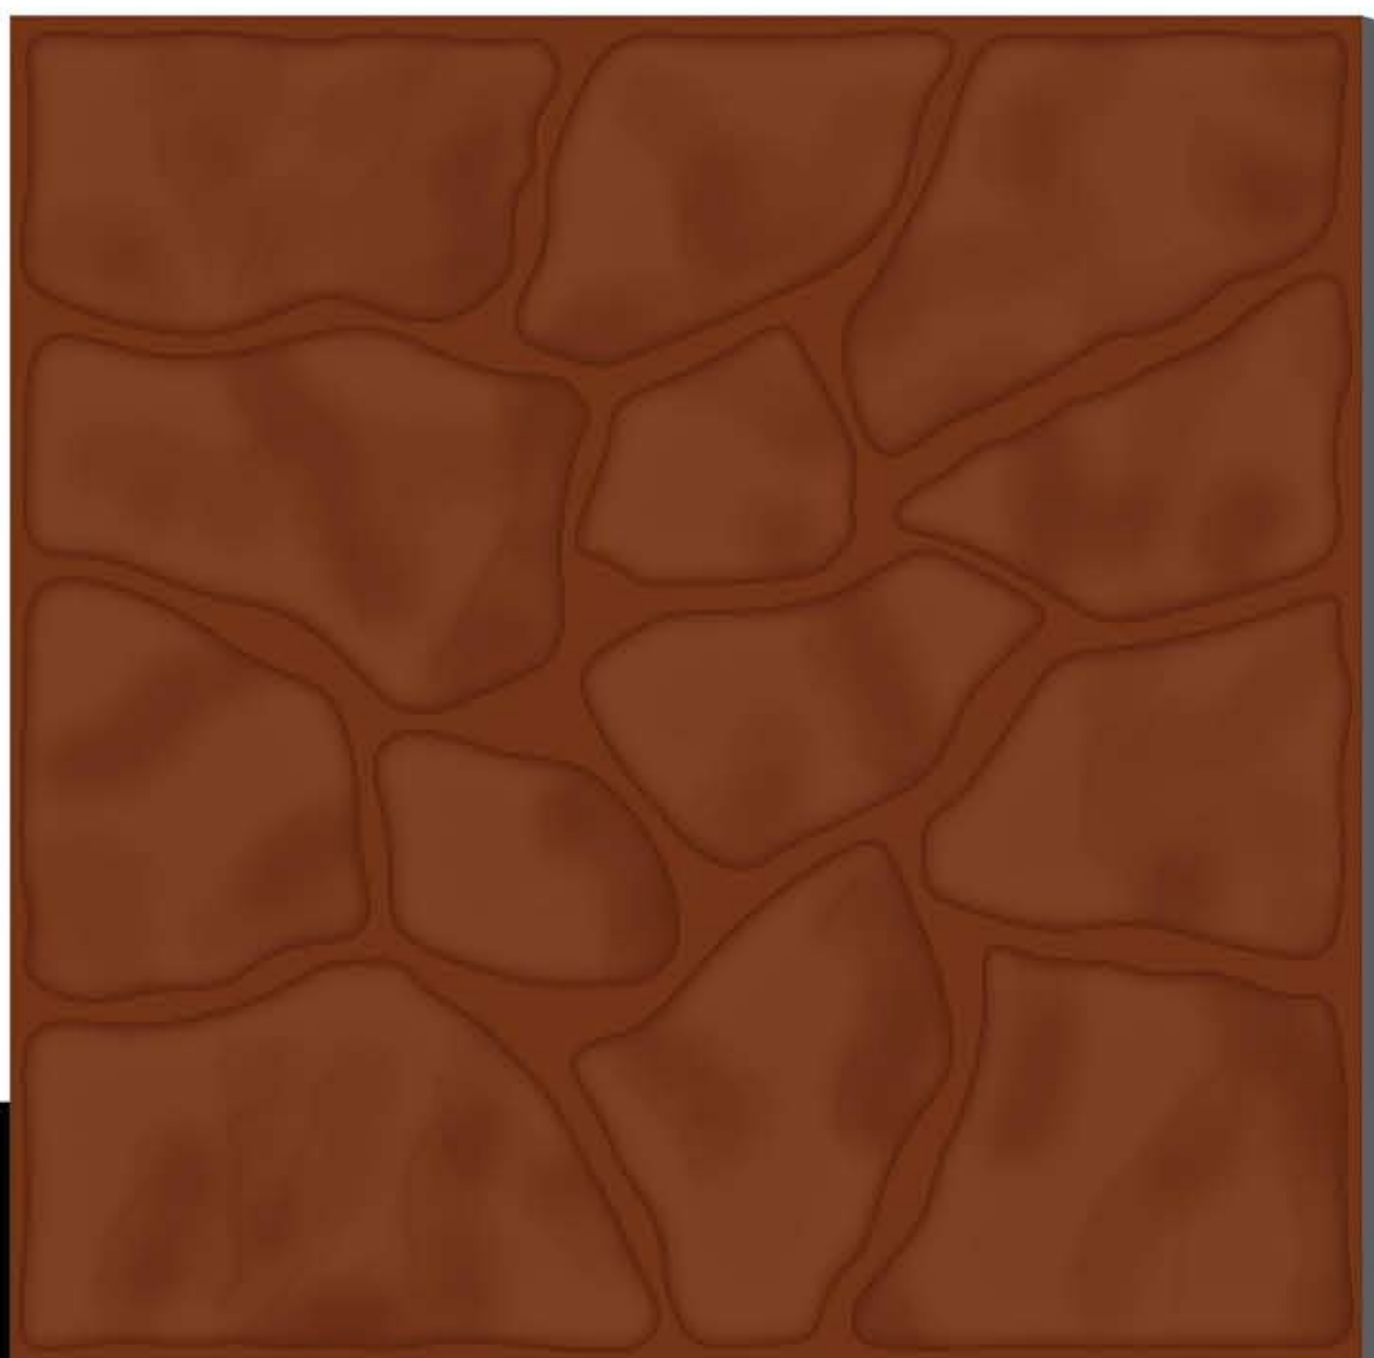

MATT  
300x300mm  
IVORY, TERRACOTTA

959

960

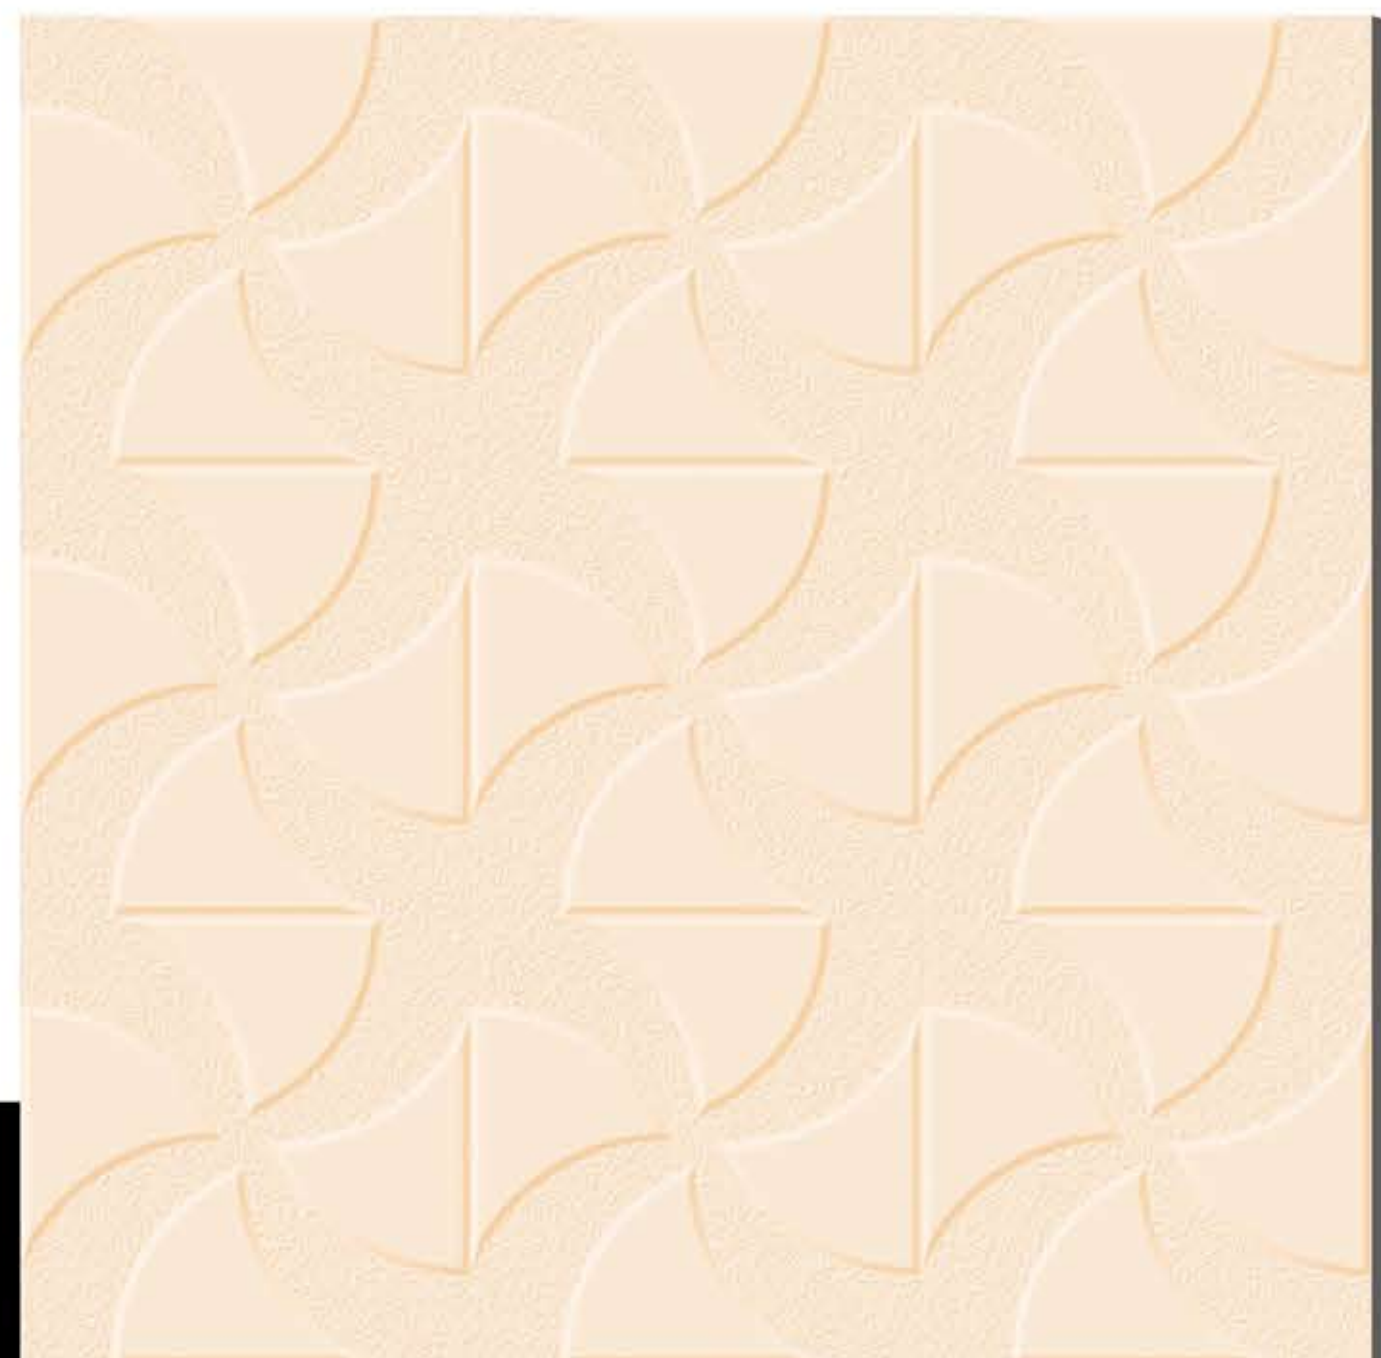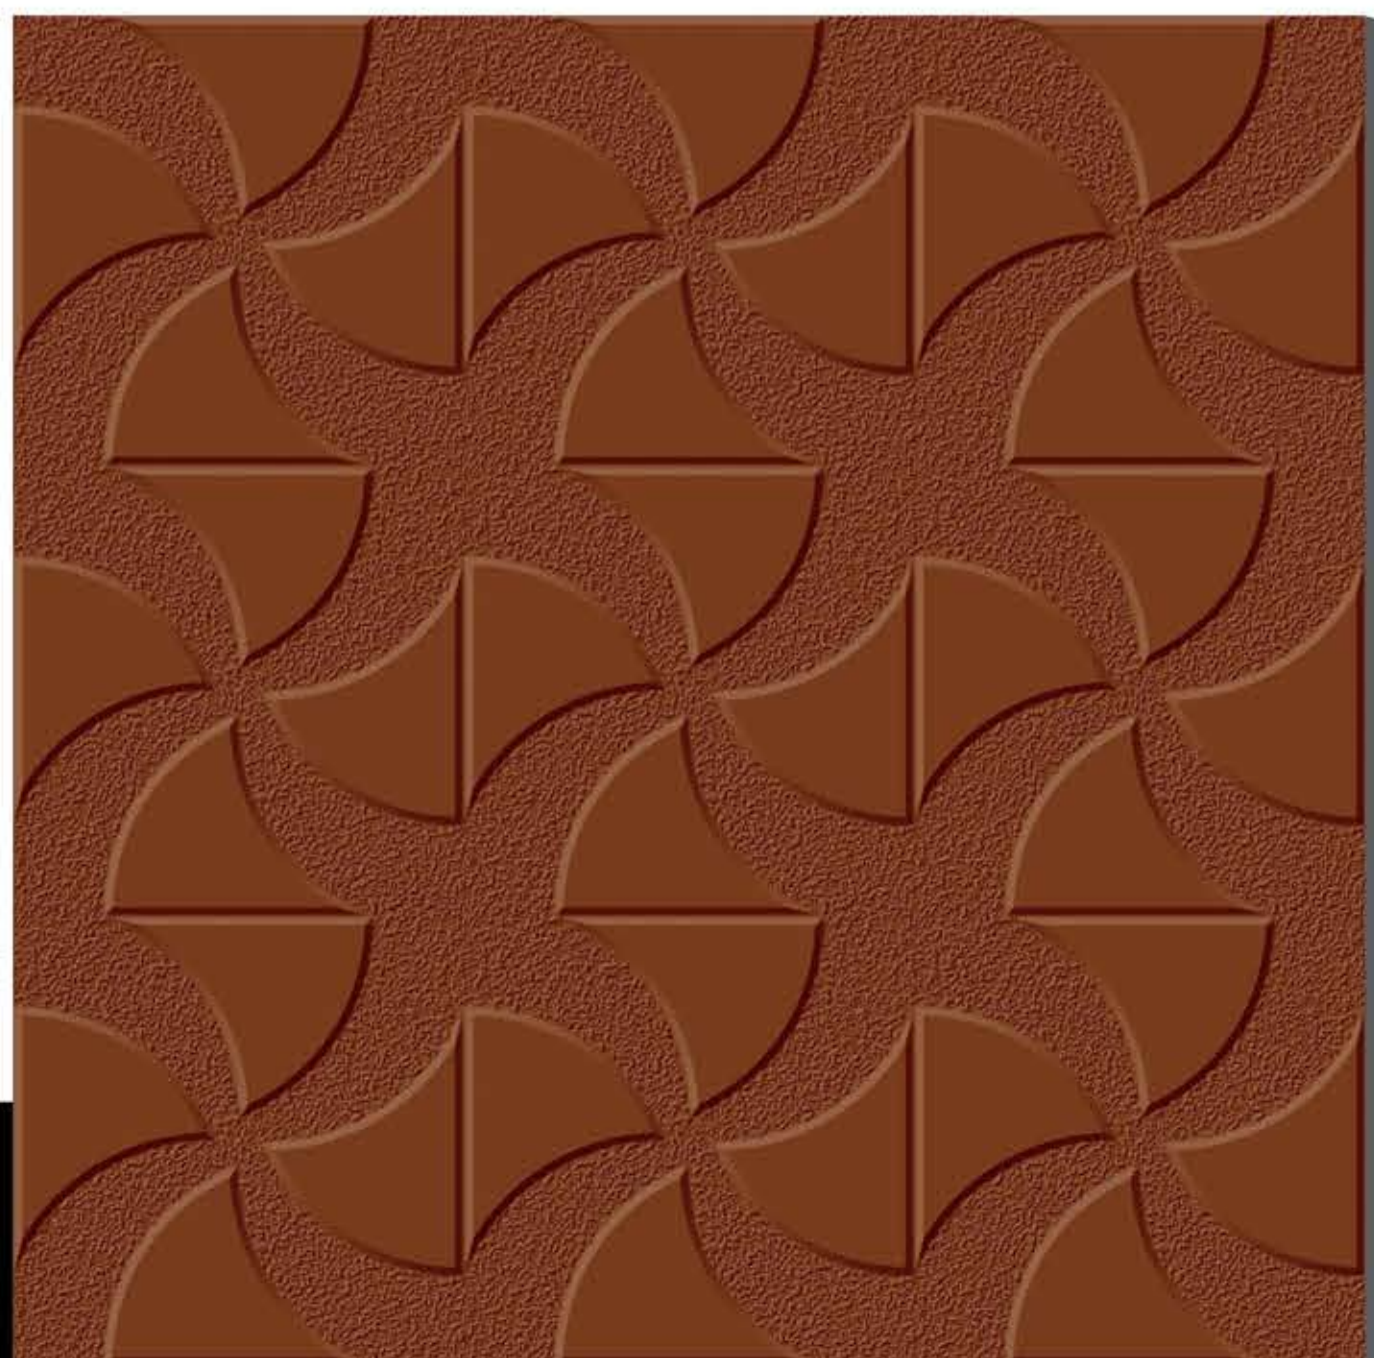

**MATT**  
**300x300mm**  
**IVORY, TERRACOTTA**

**961**



**962**



**MATT**  
**300x300mm**  
**IVORY, TERRACOTTA**

**963**




**964**

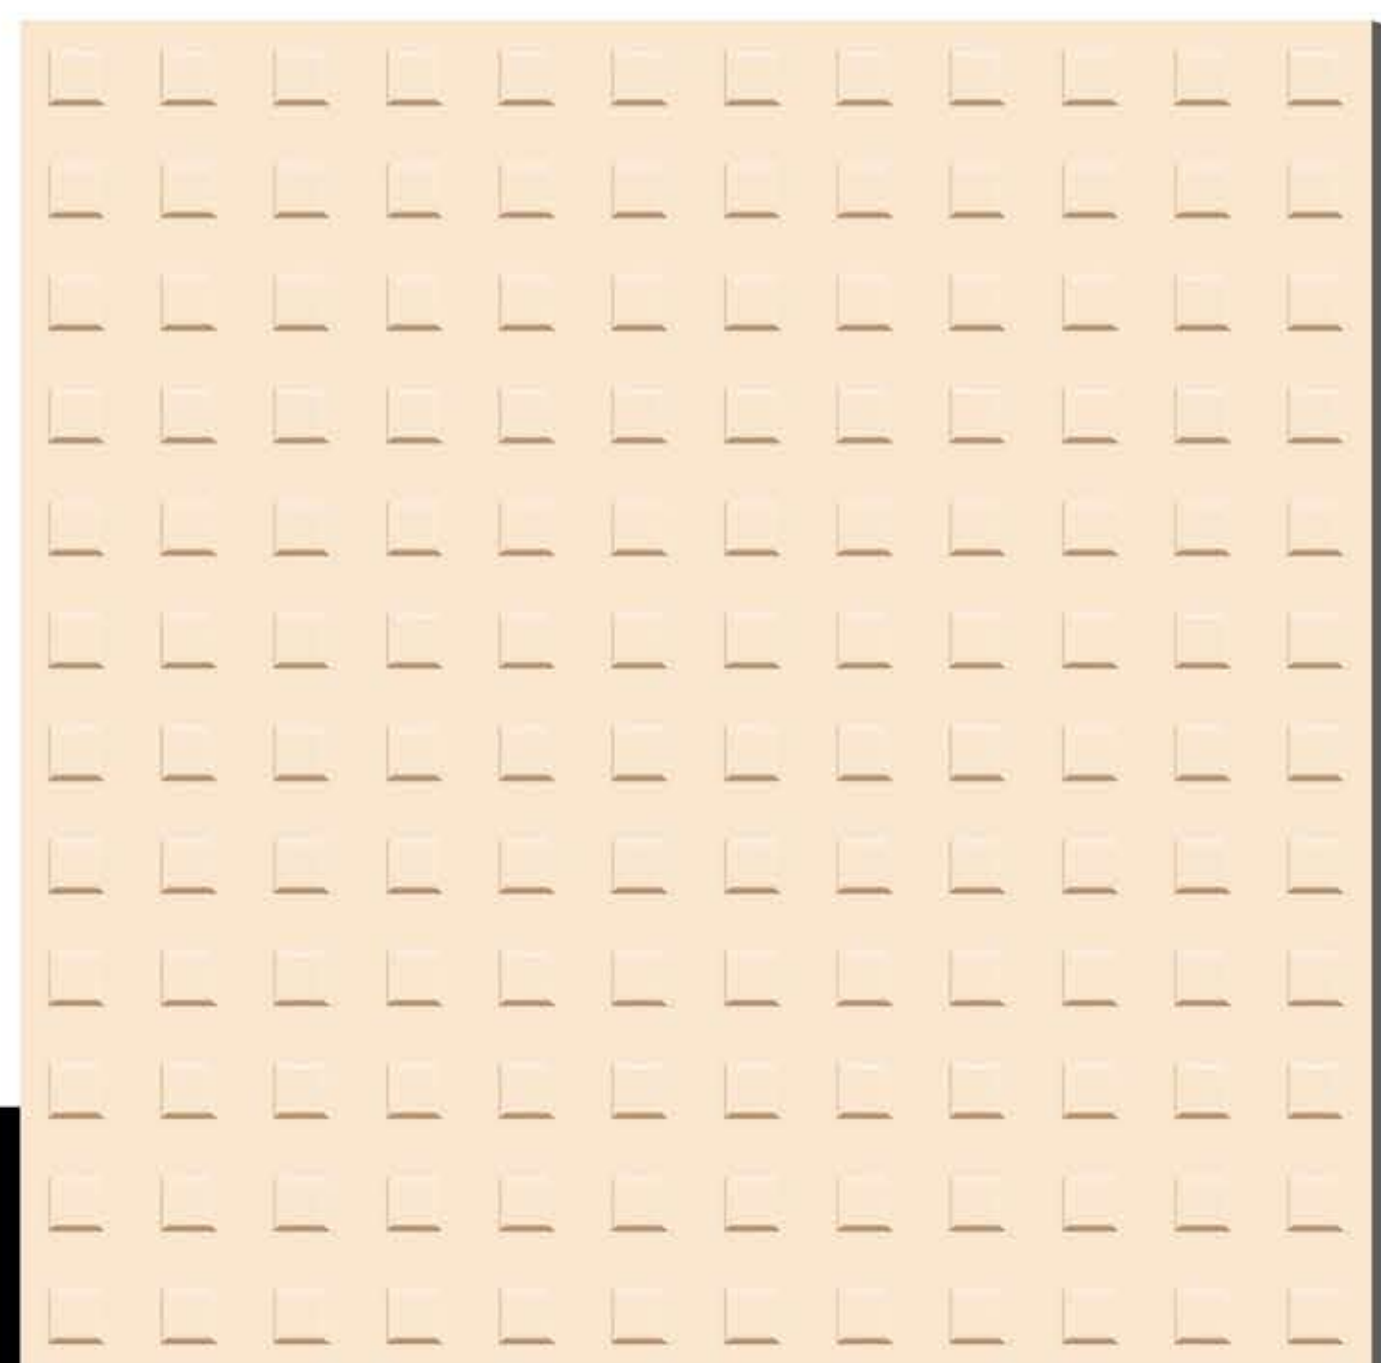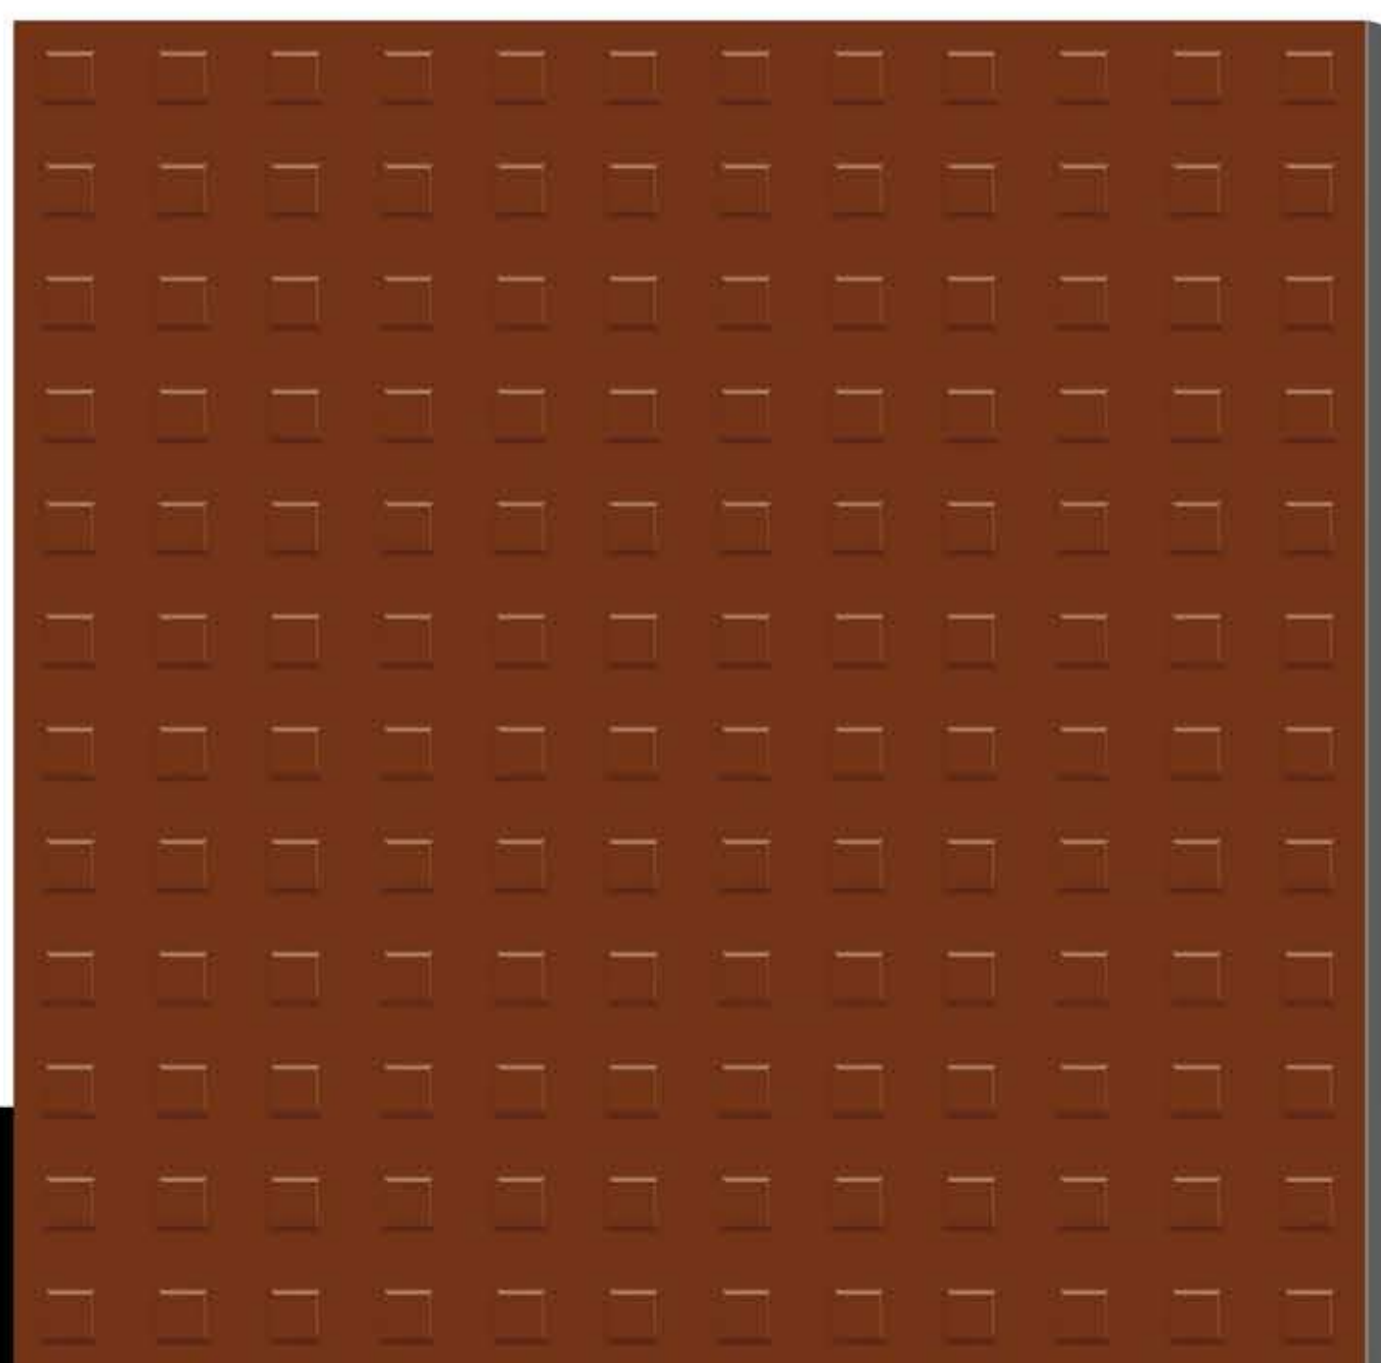

MATT  
300x300mm  
IVORY, TERRACOTTA

965



966

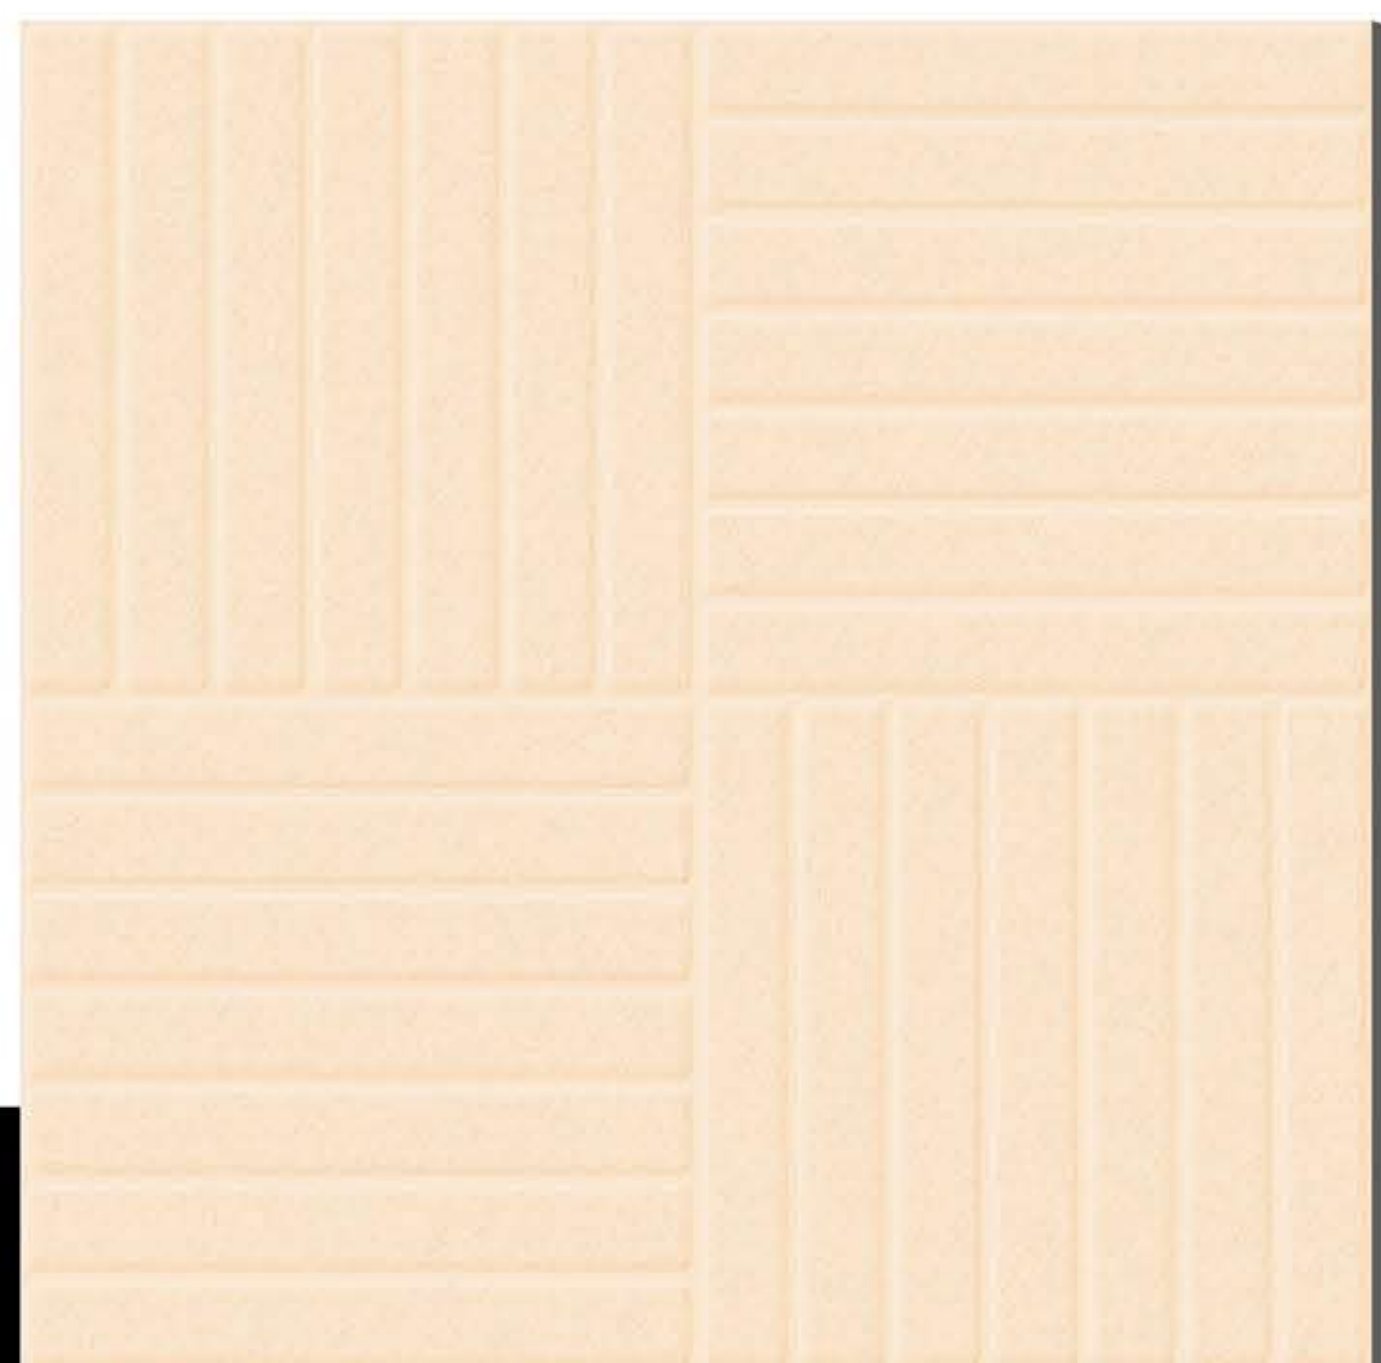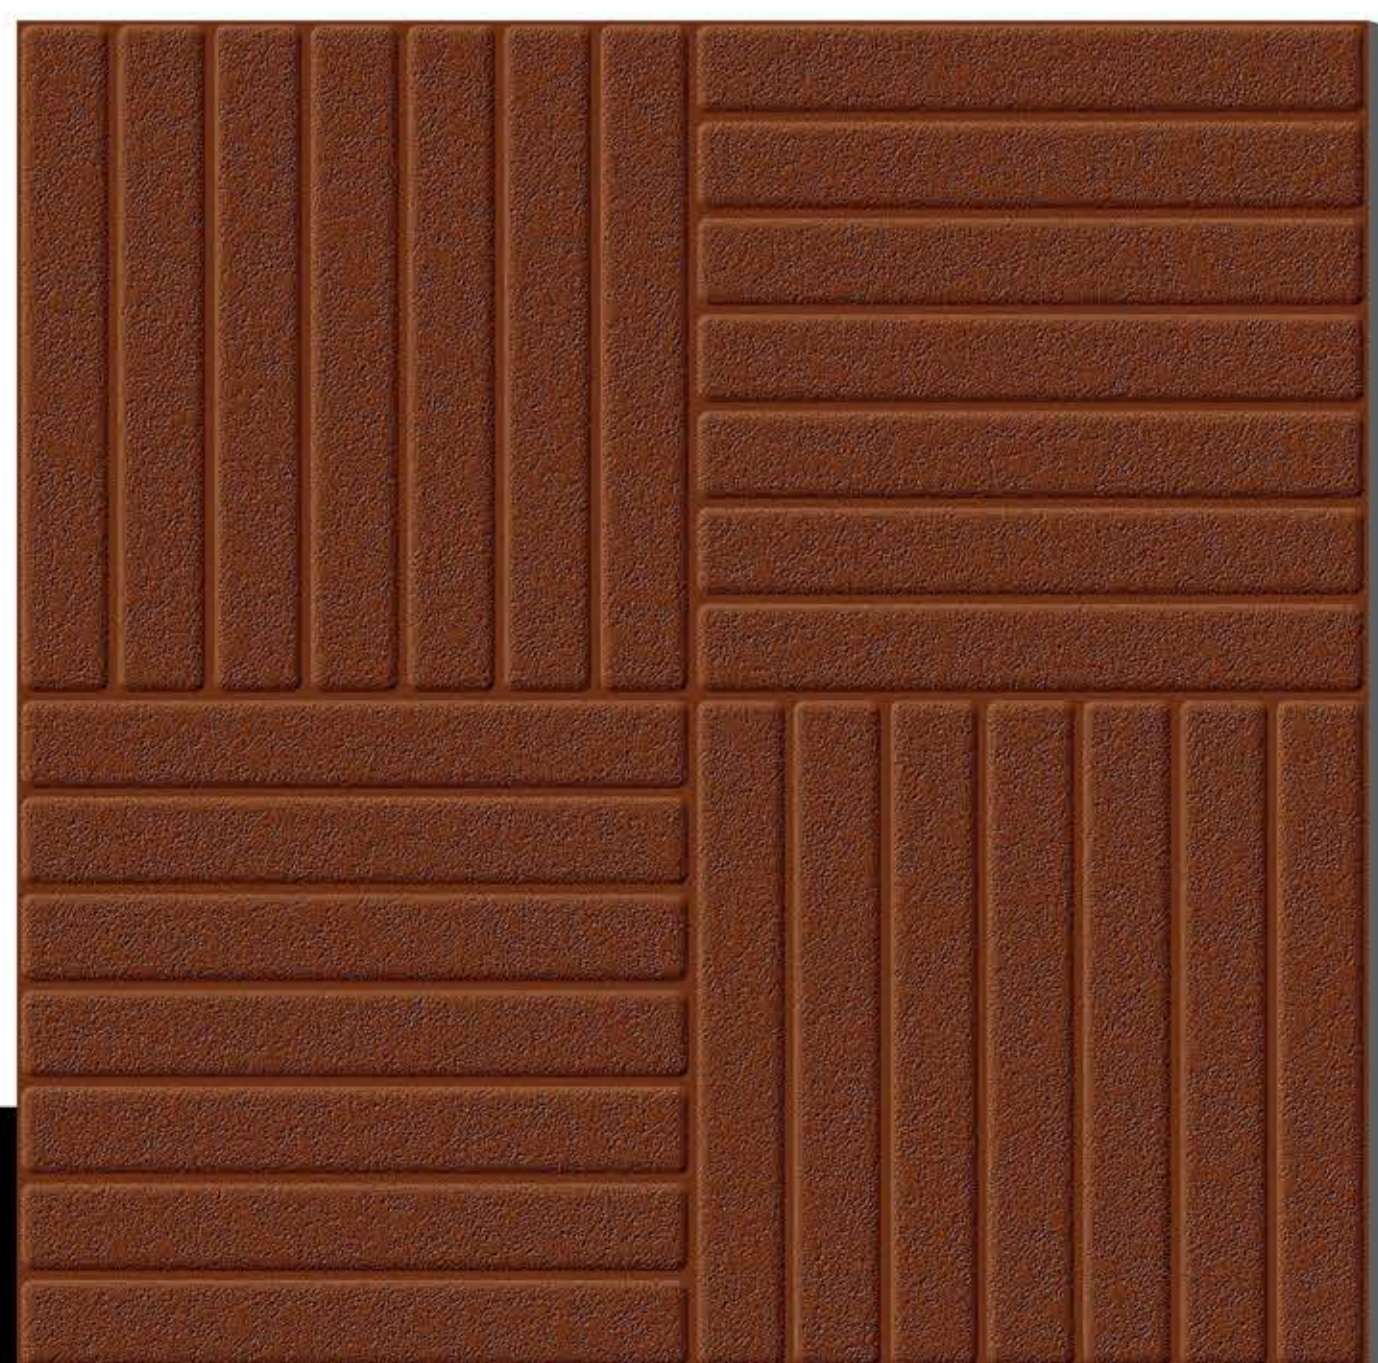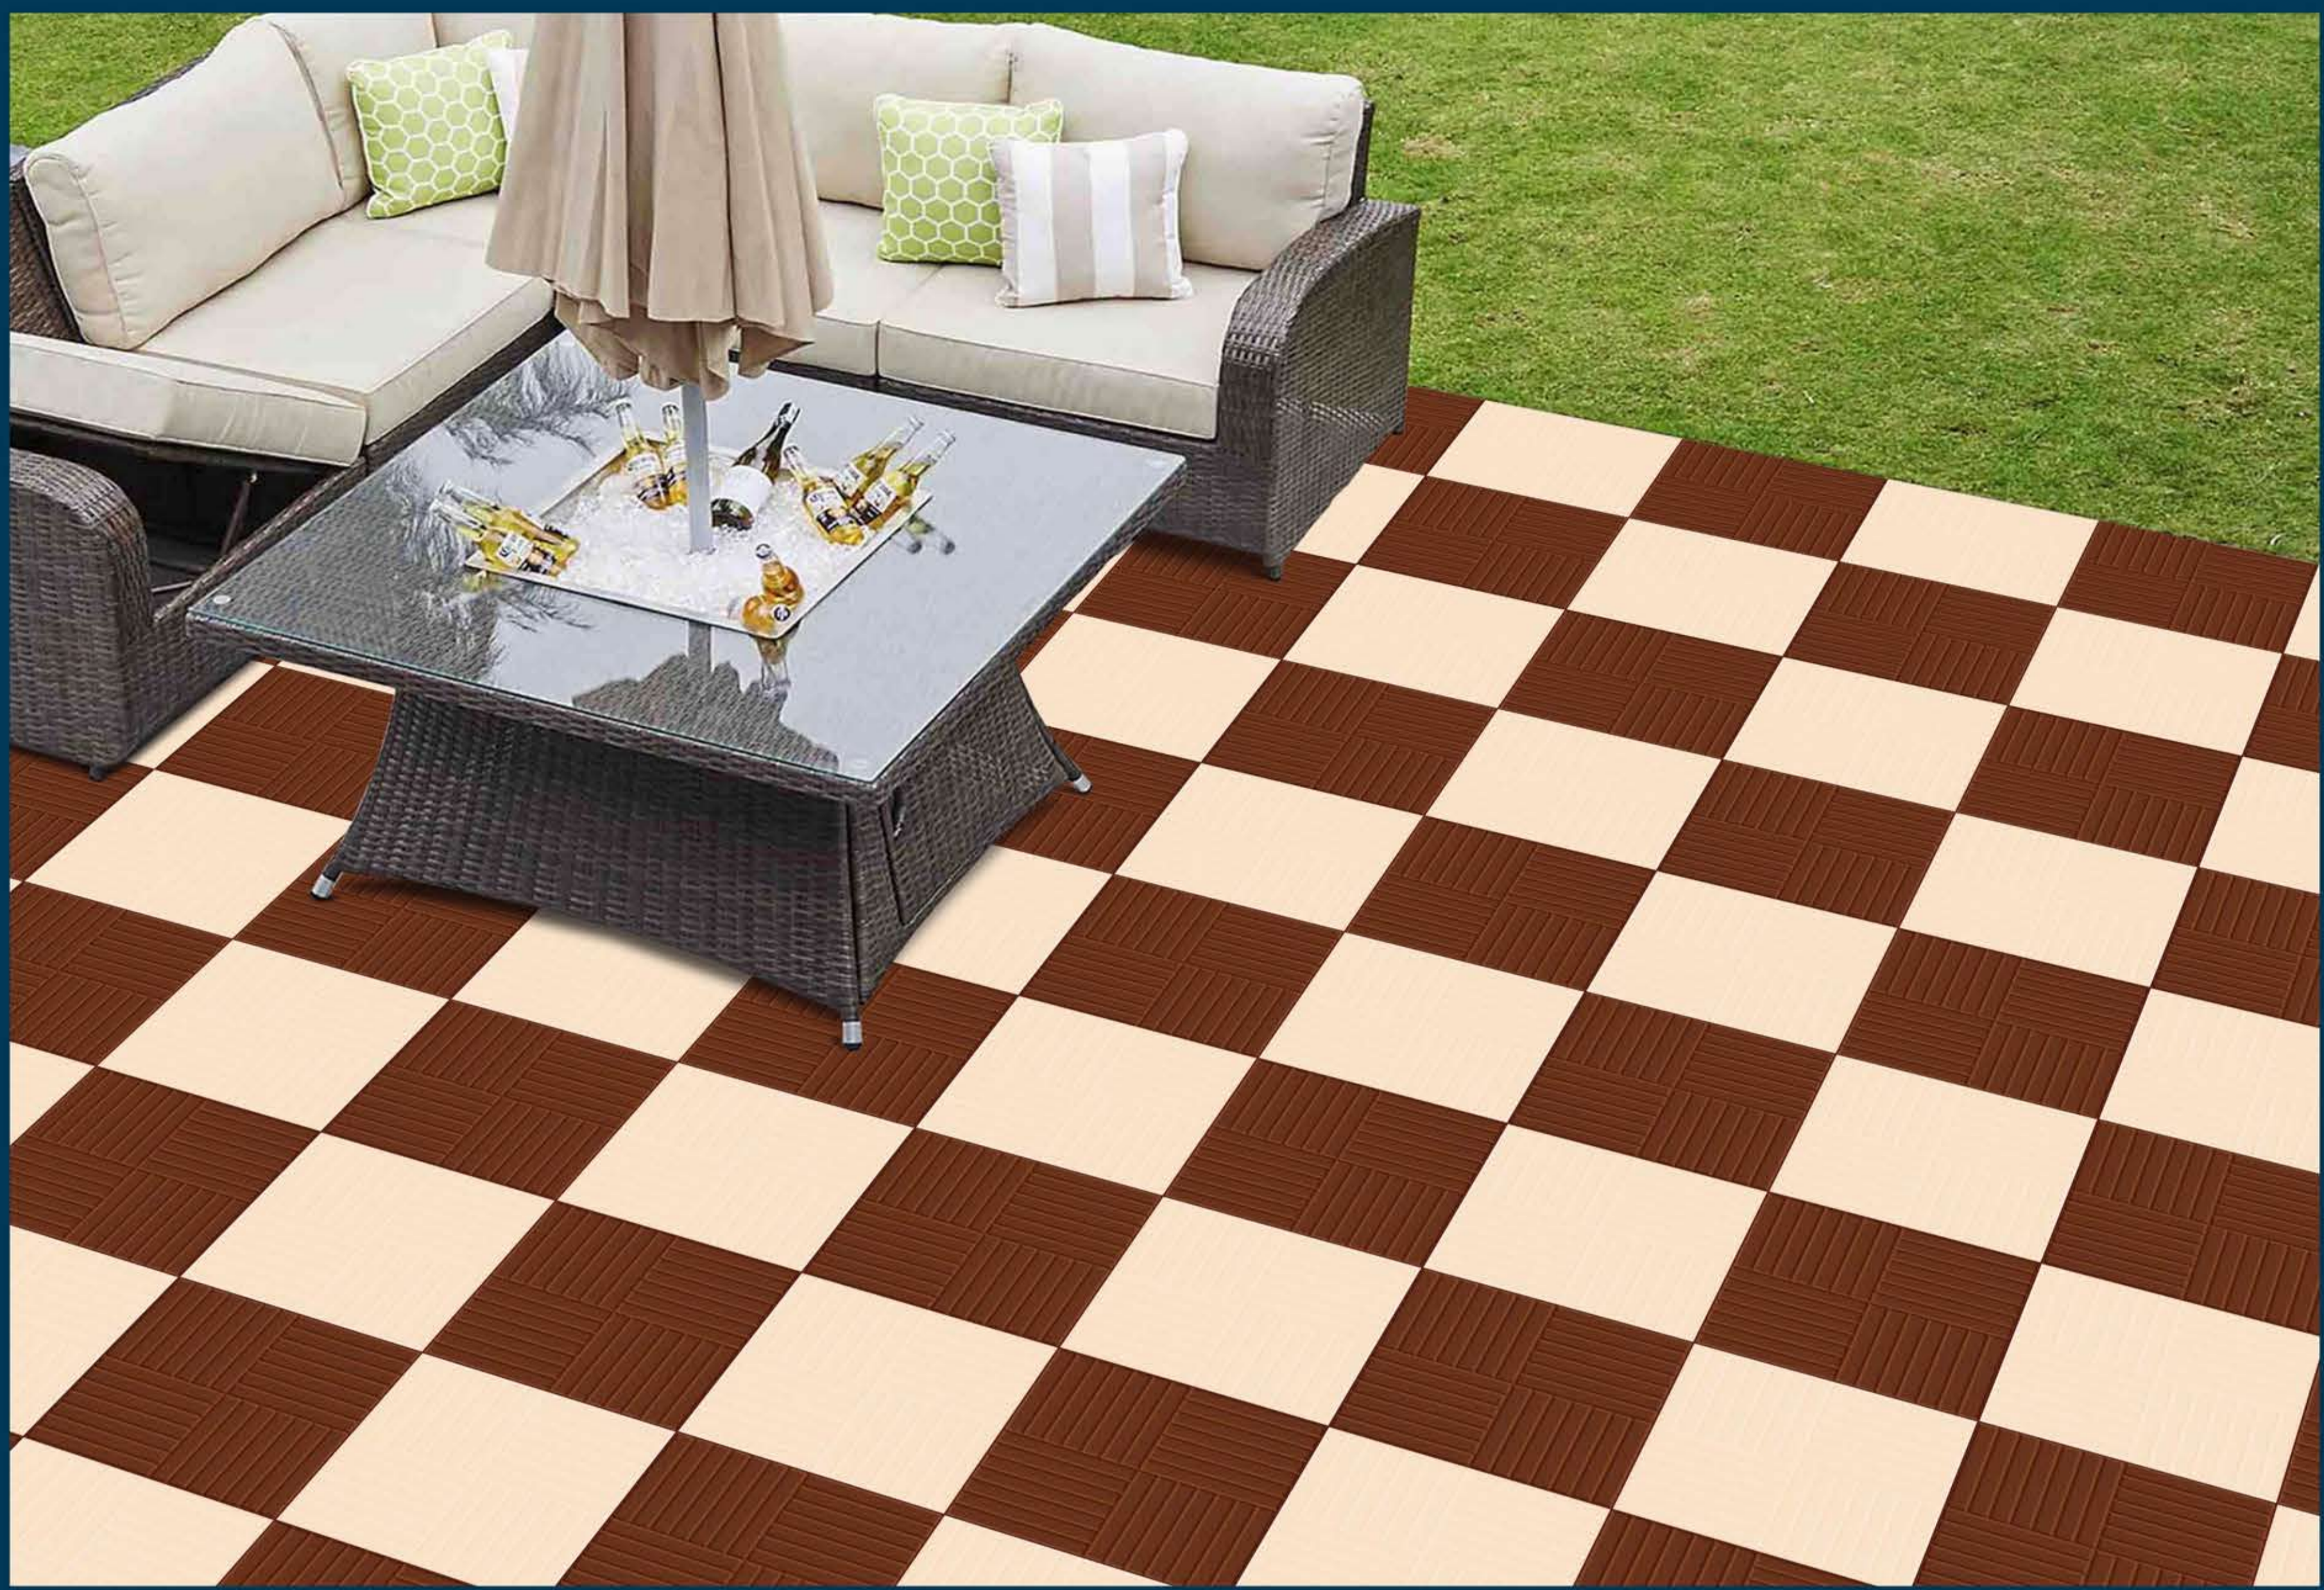

**MATT**  
**300x300mm**  
**IVORY, TERRACOTTA**

**967**


**968**

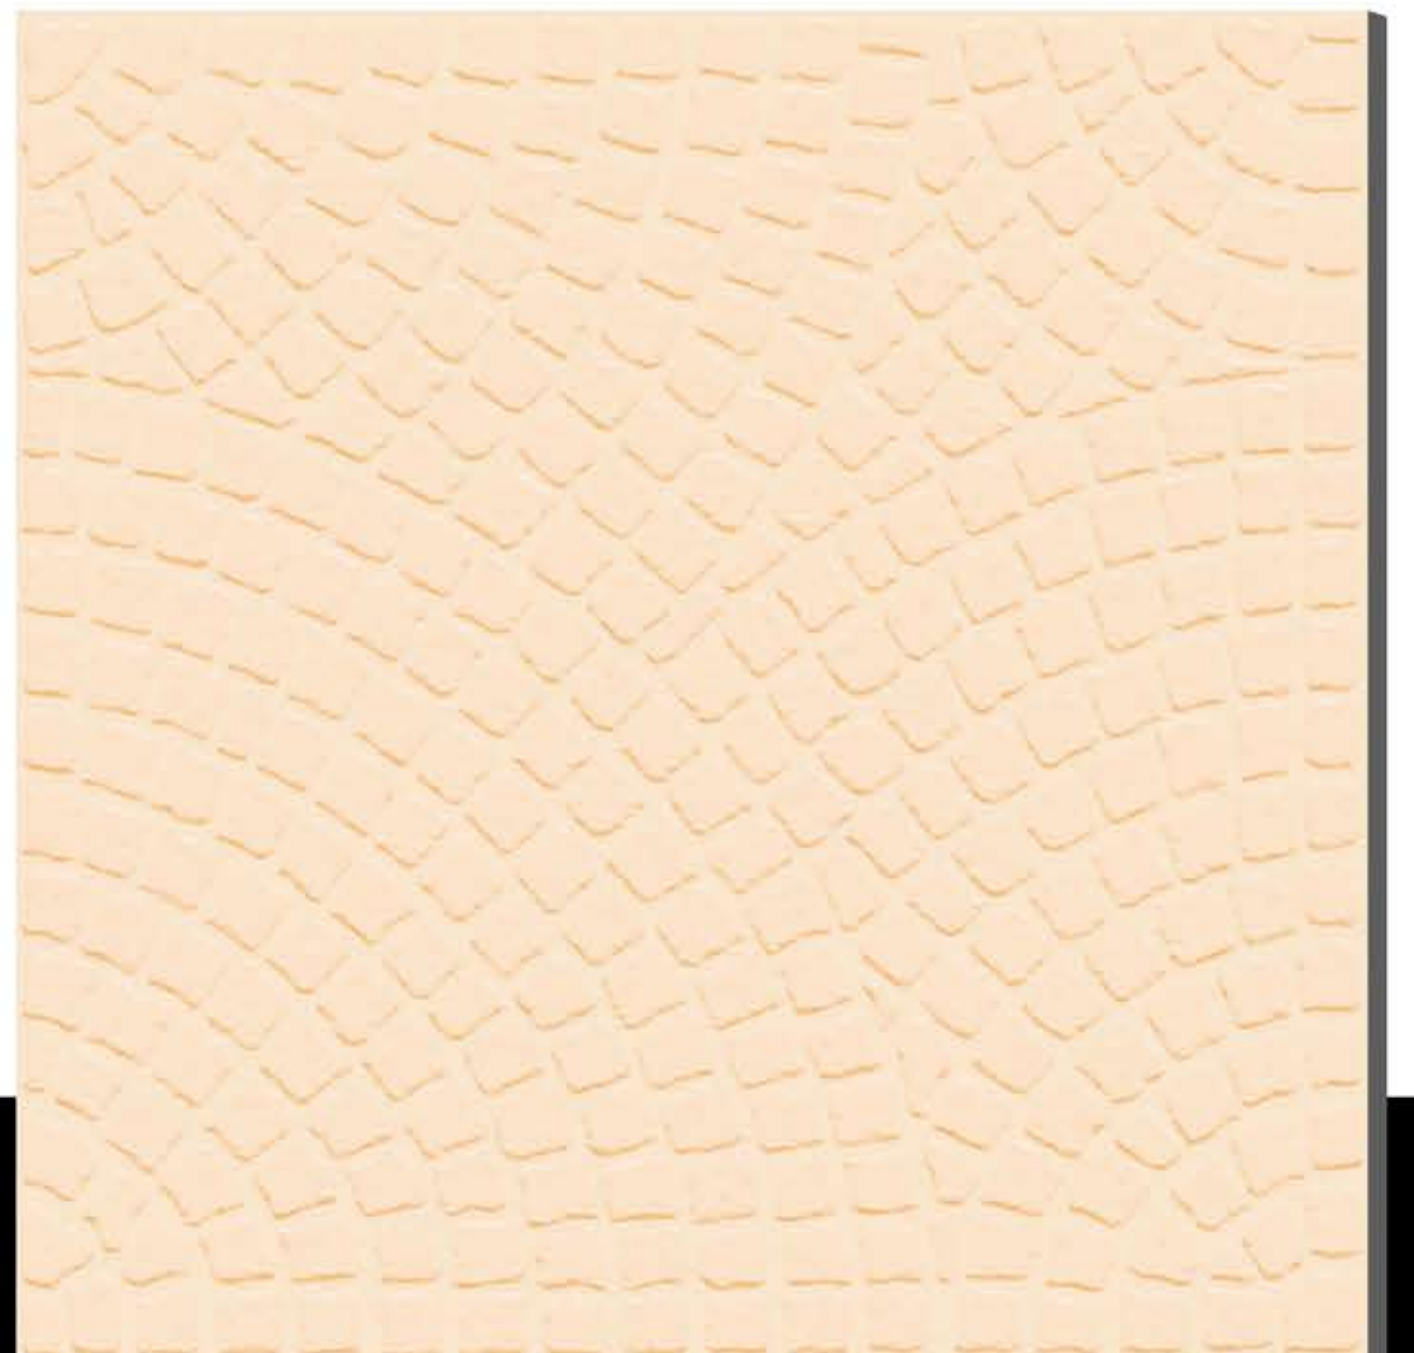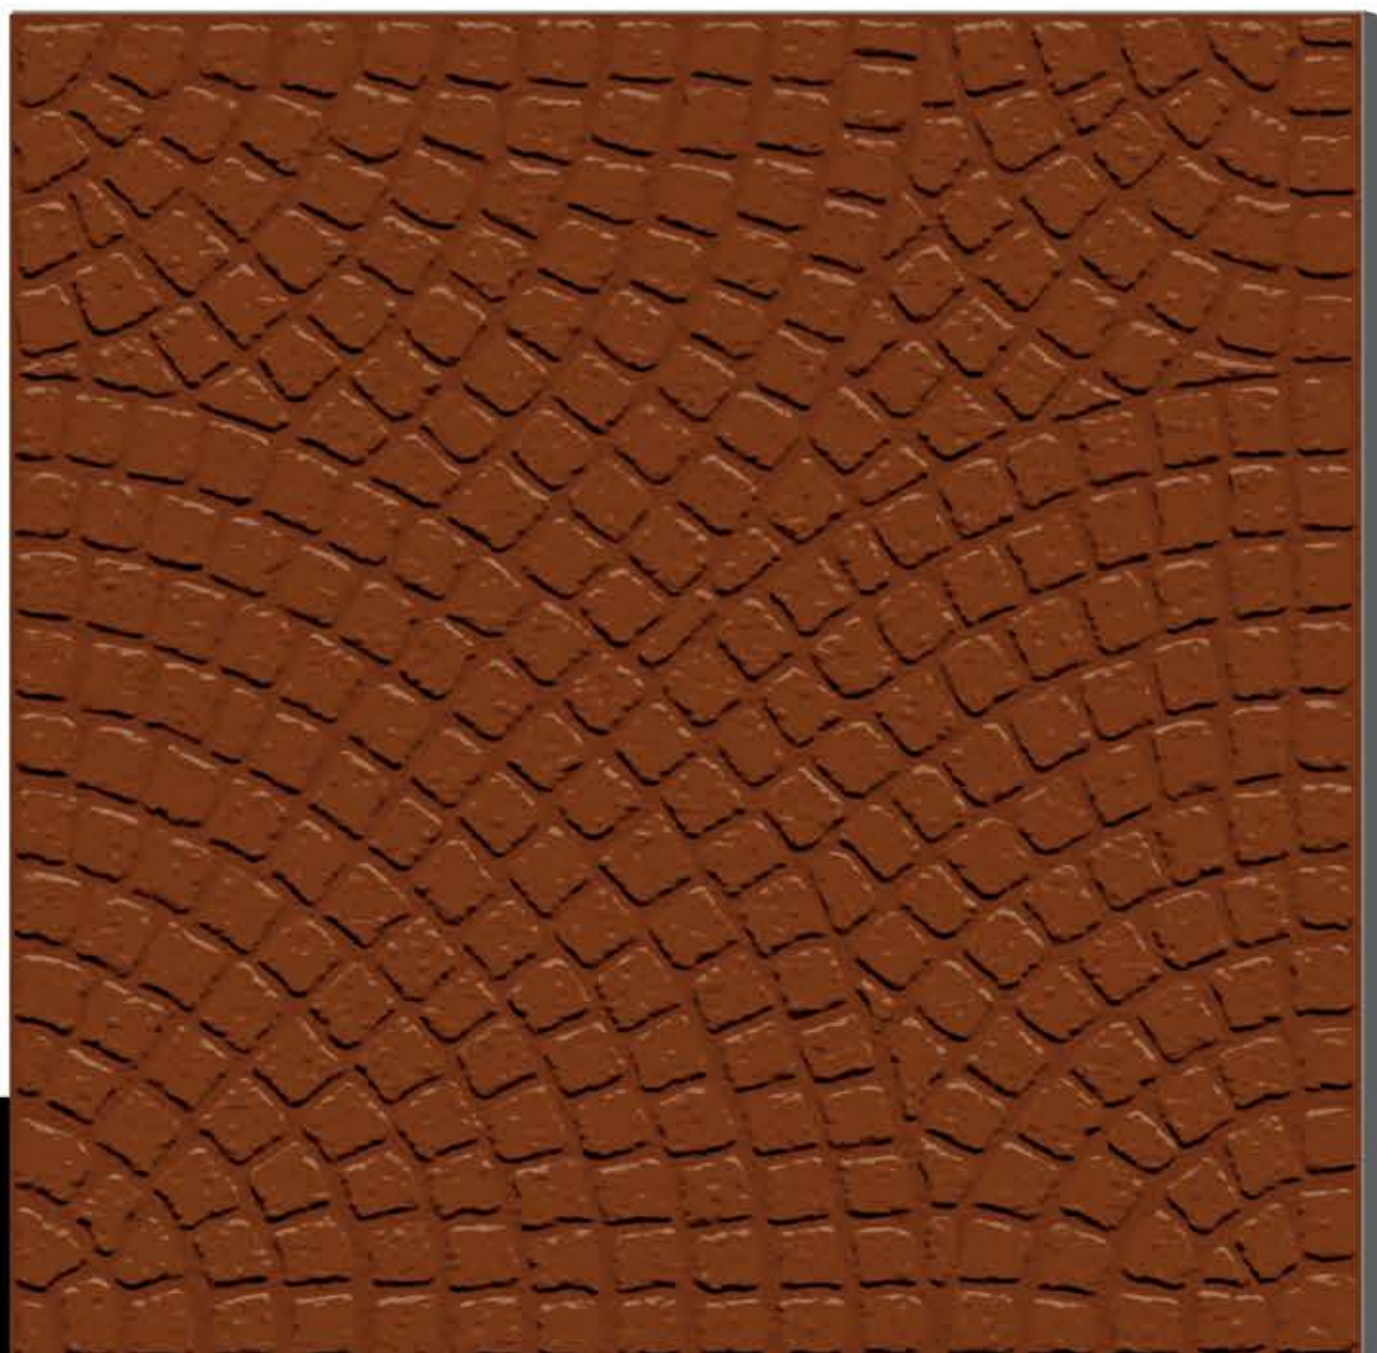

MATT  
300x300mm  
IVORY, TERRACOTTA

969




970

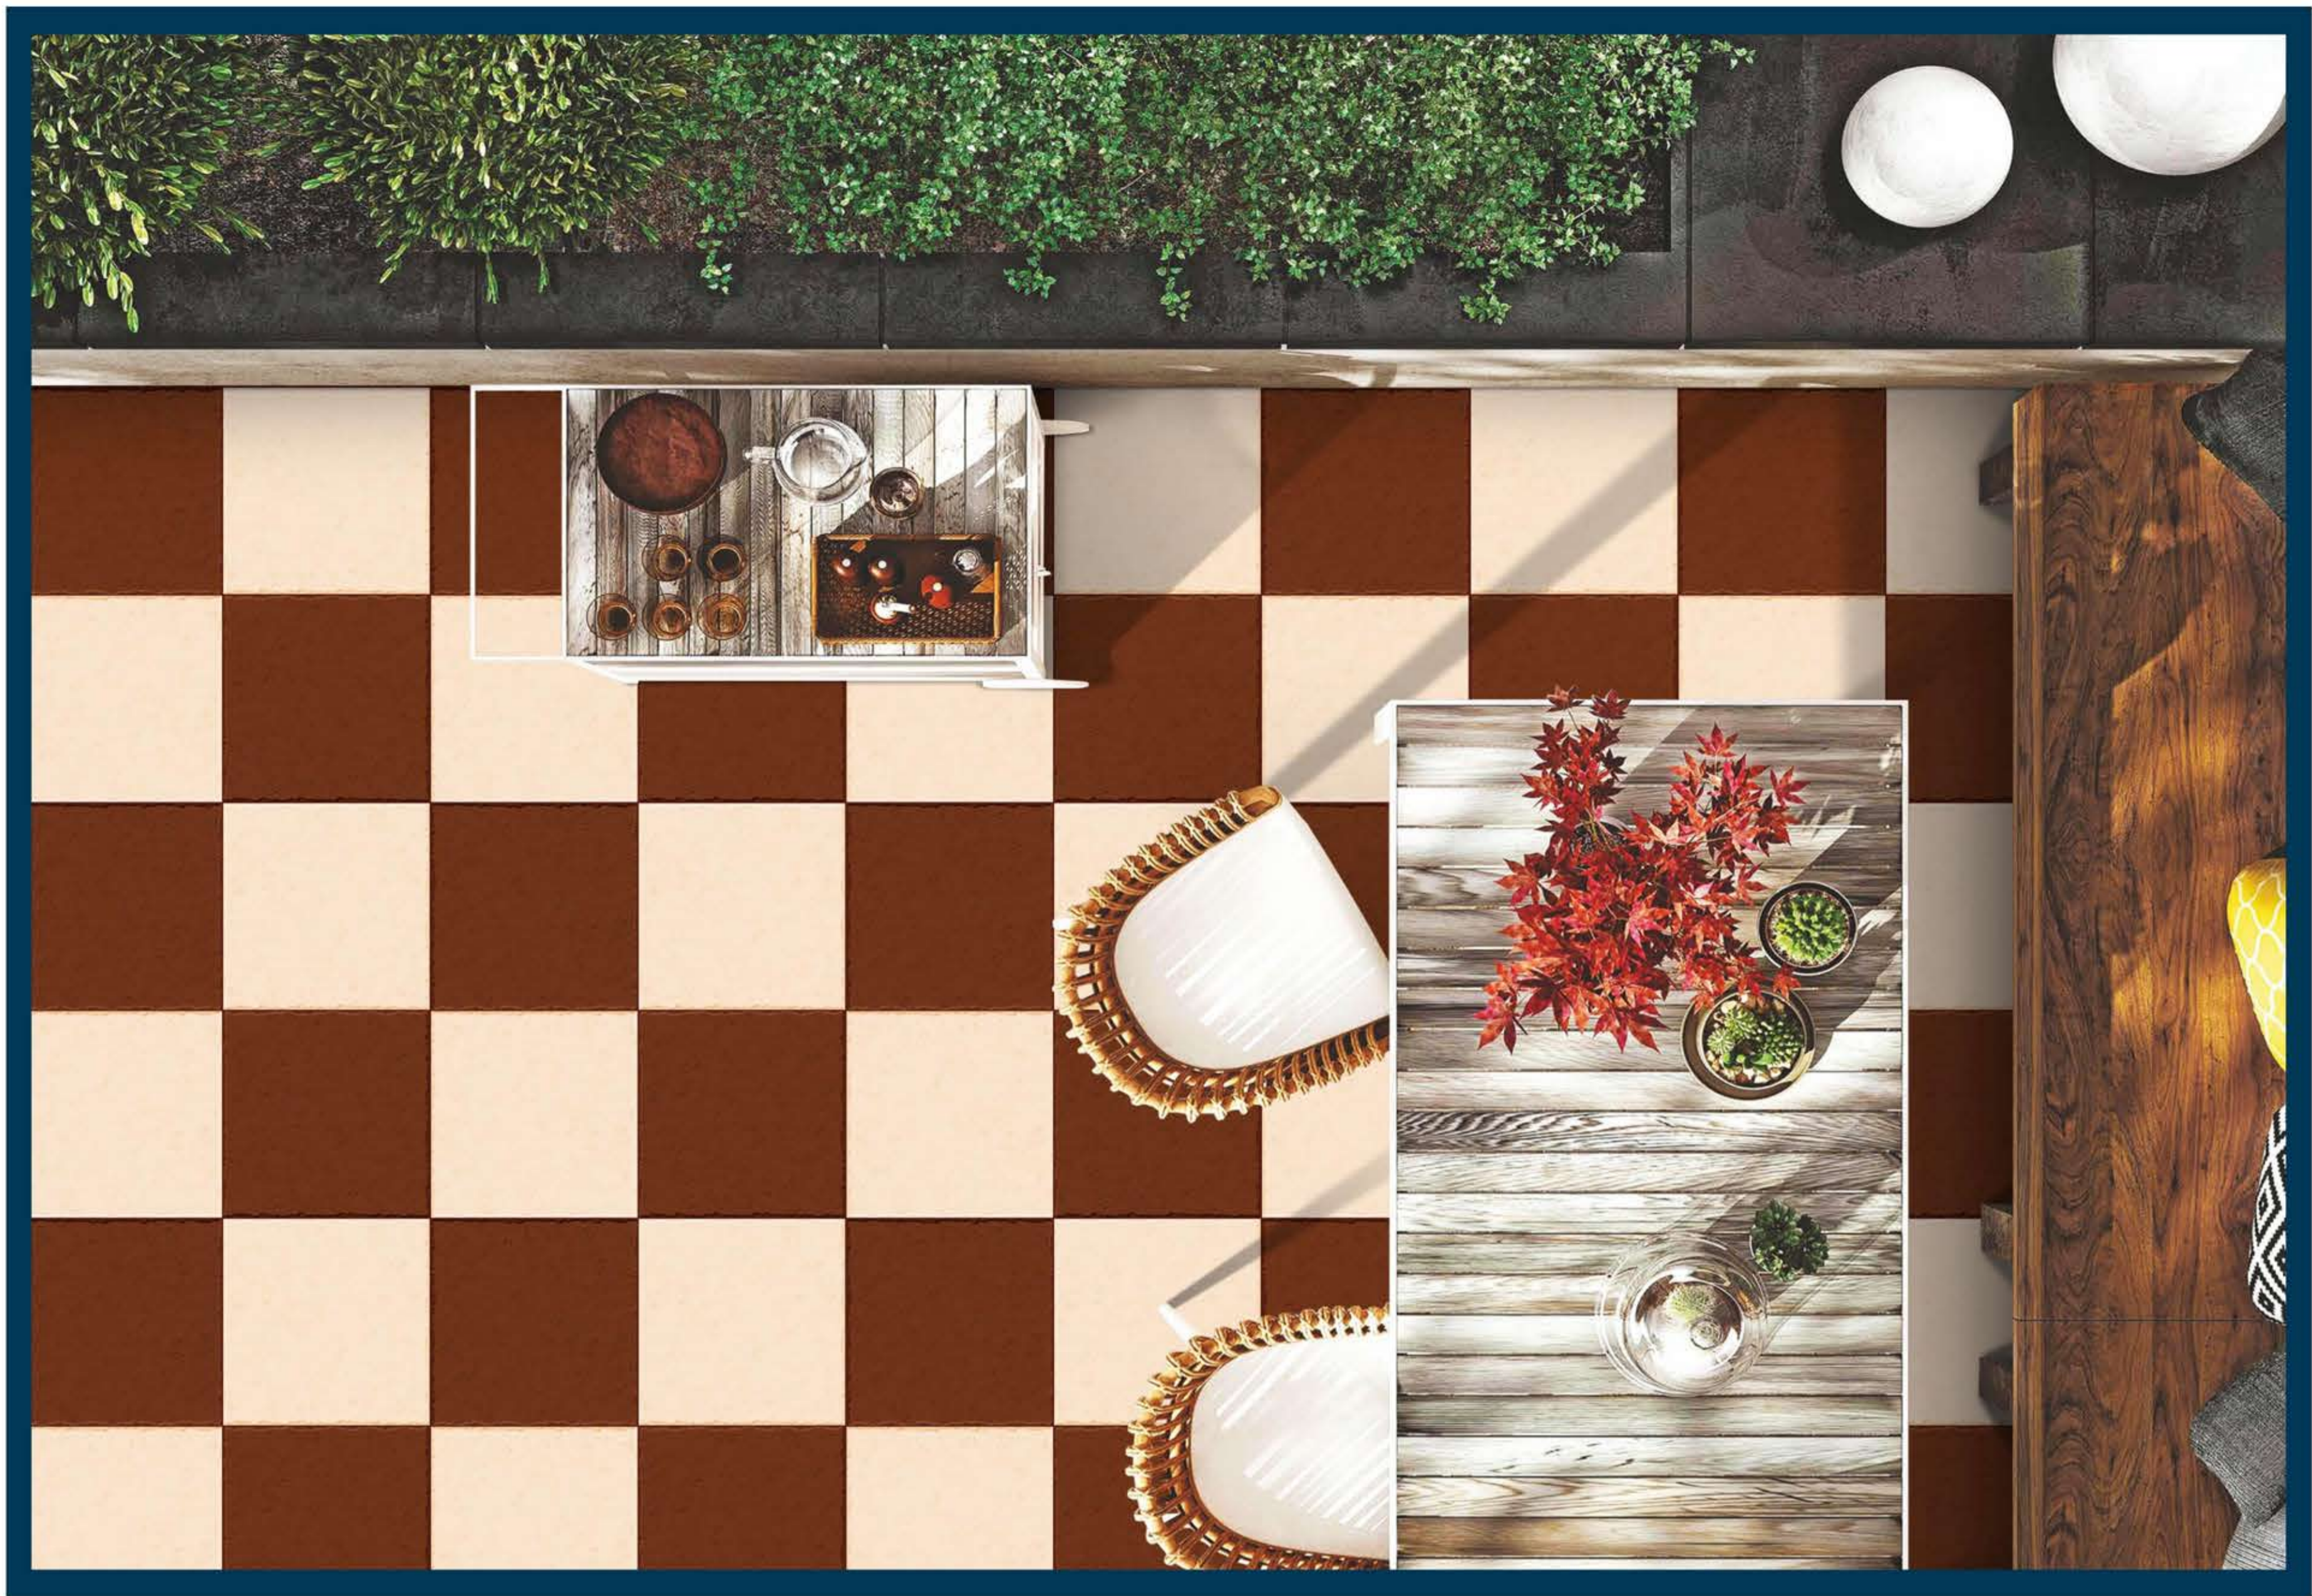

MATT  
300x300mm  
IVORY, TERRACOTTA

971



972

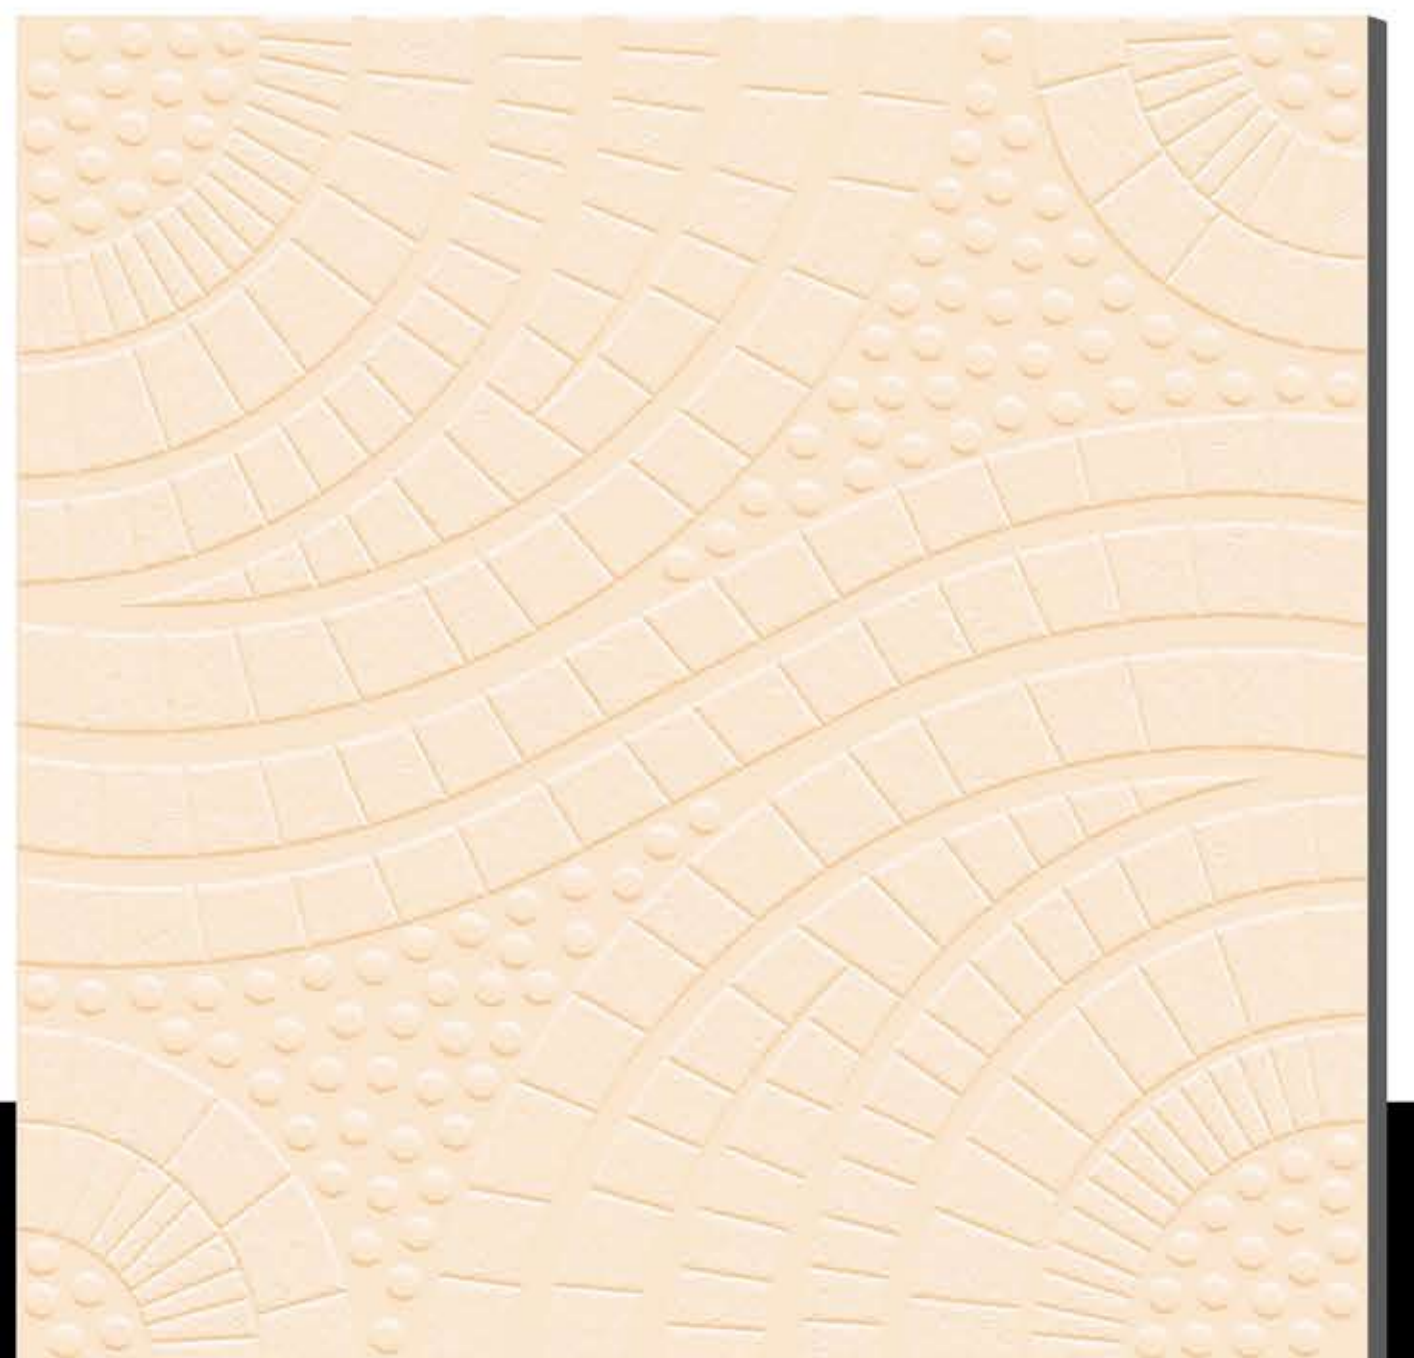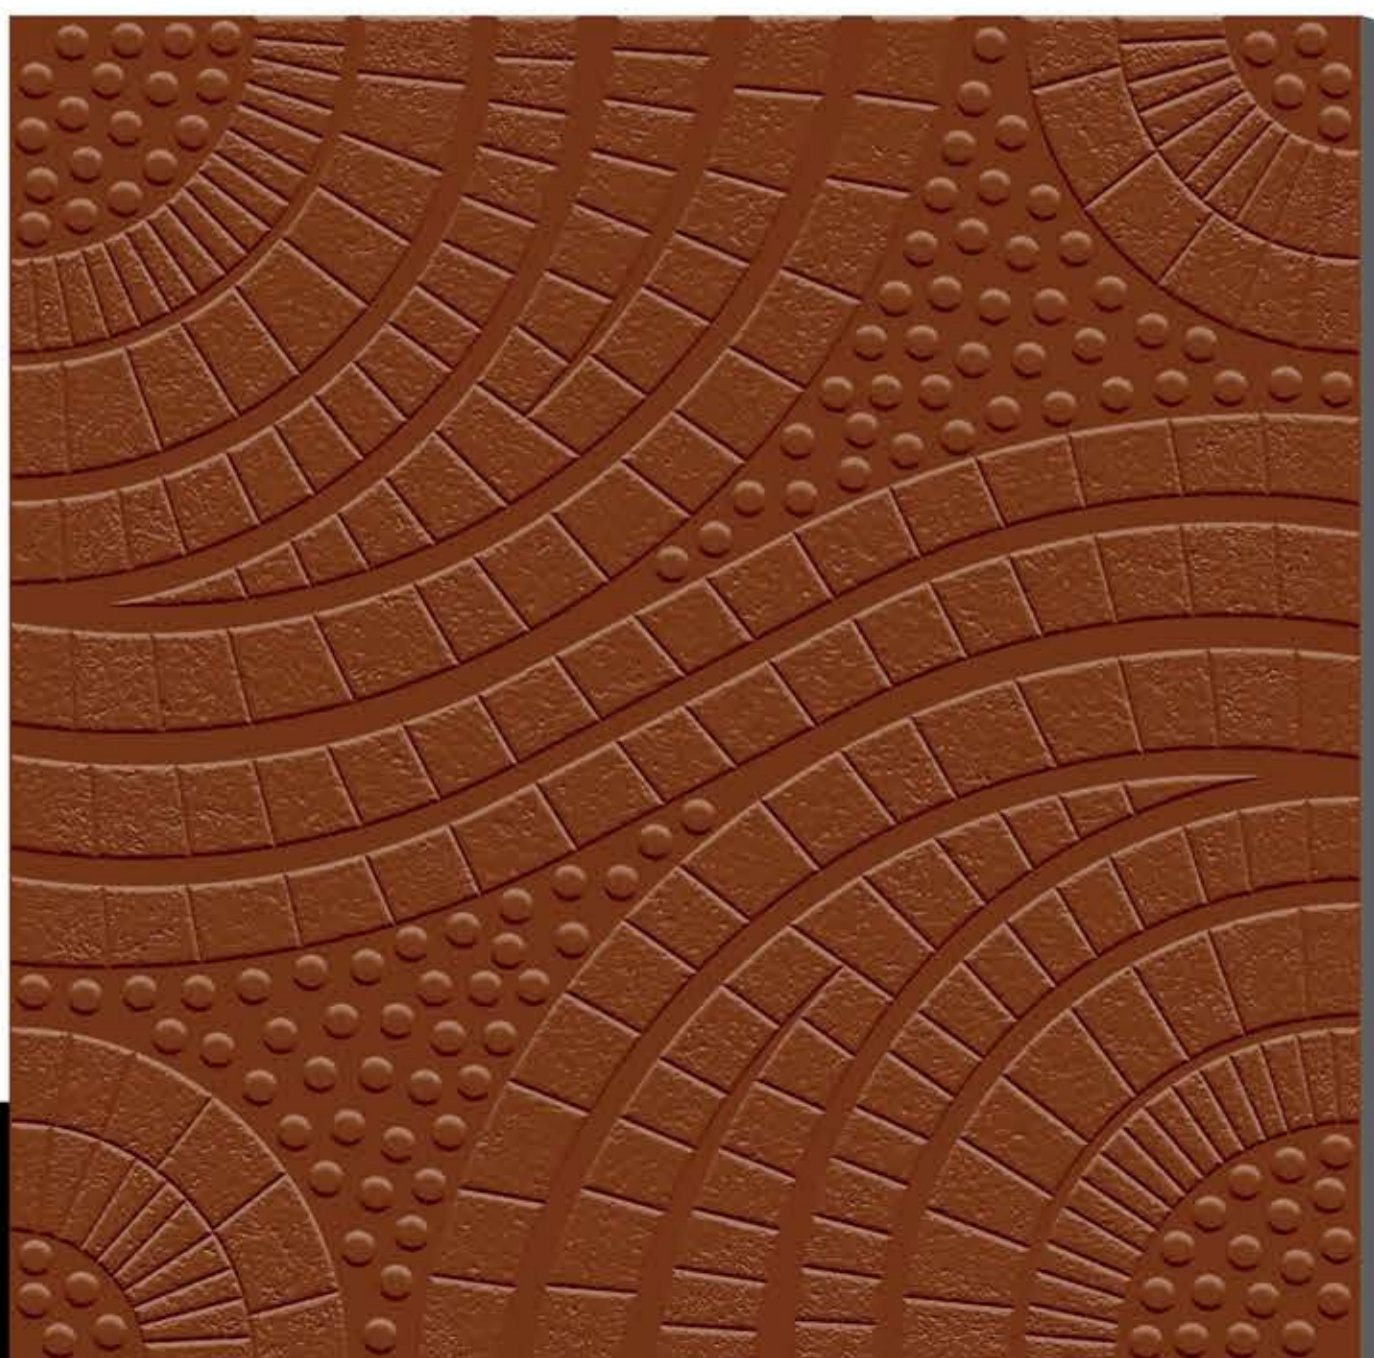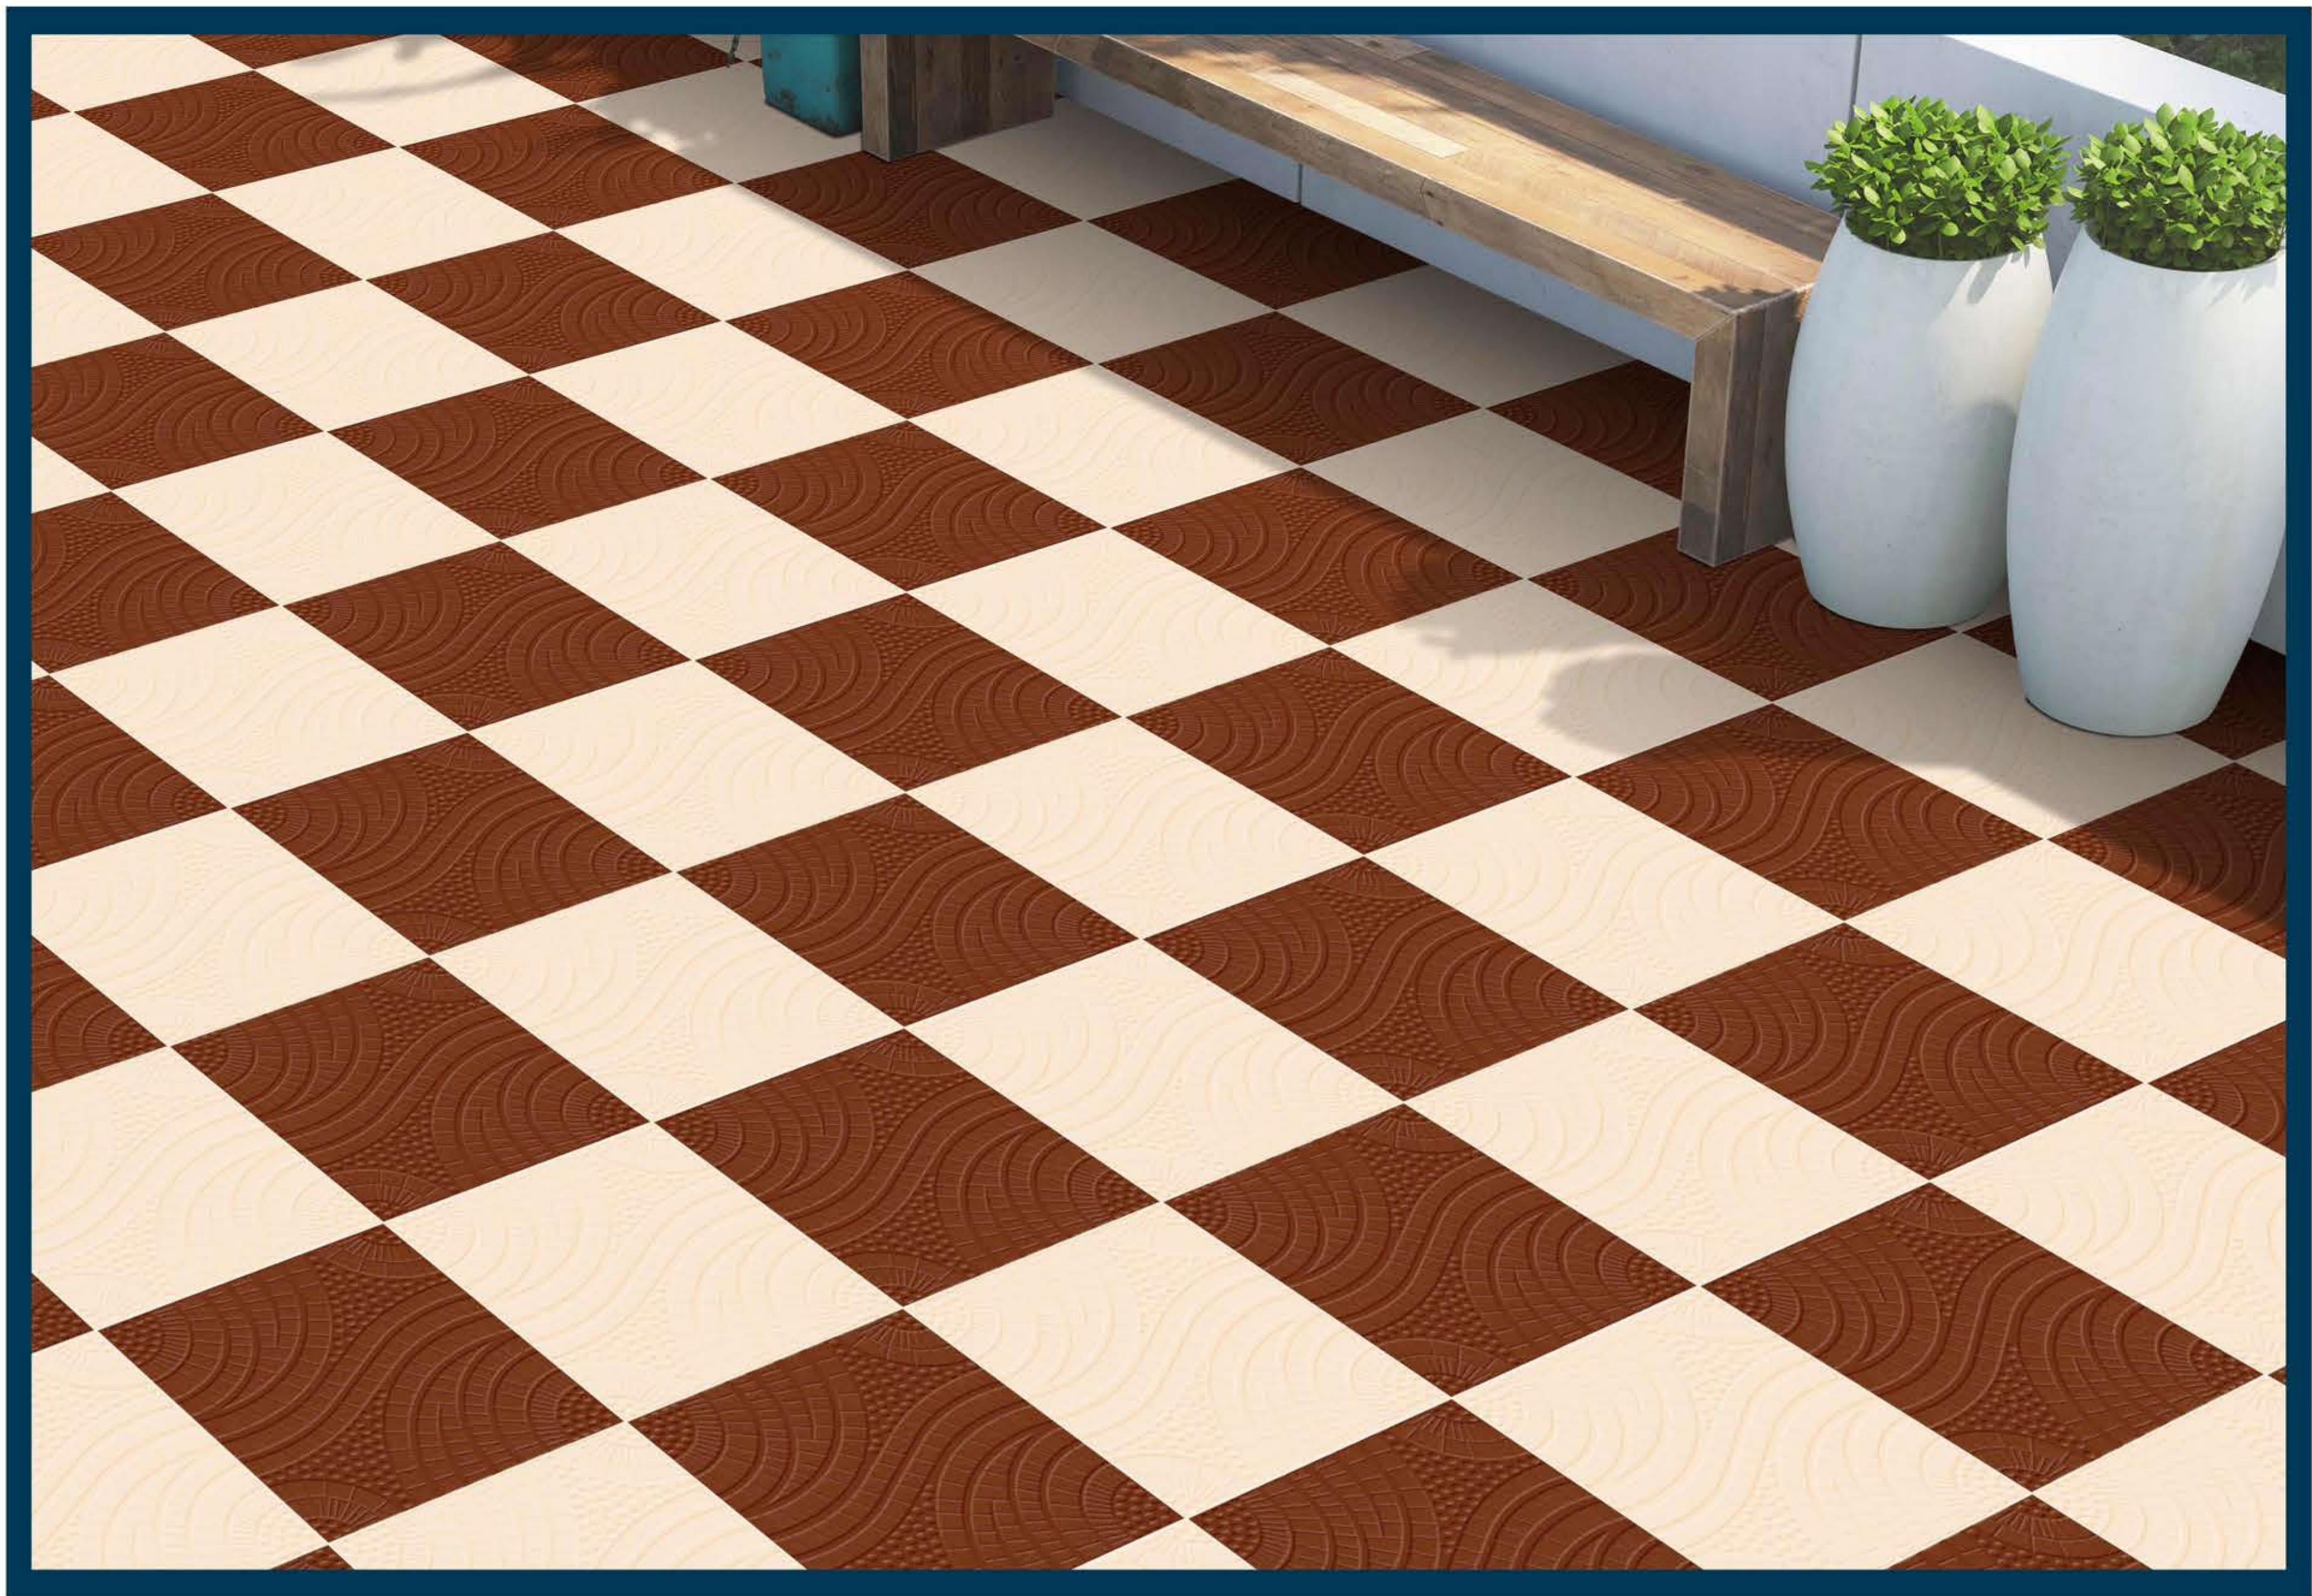

**MATT**  
**300x300mm**  
**IVORY, TERRACOTTA**

**973**



**974**

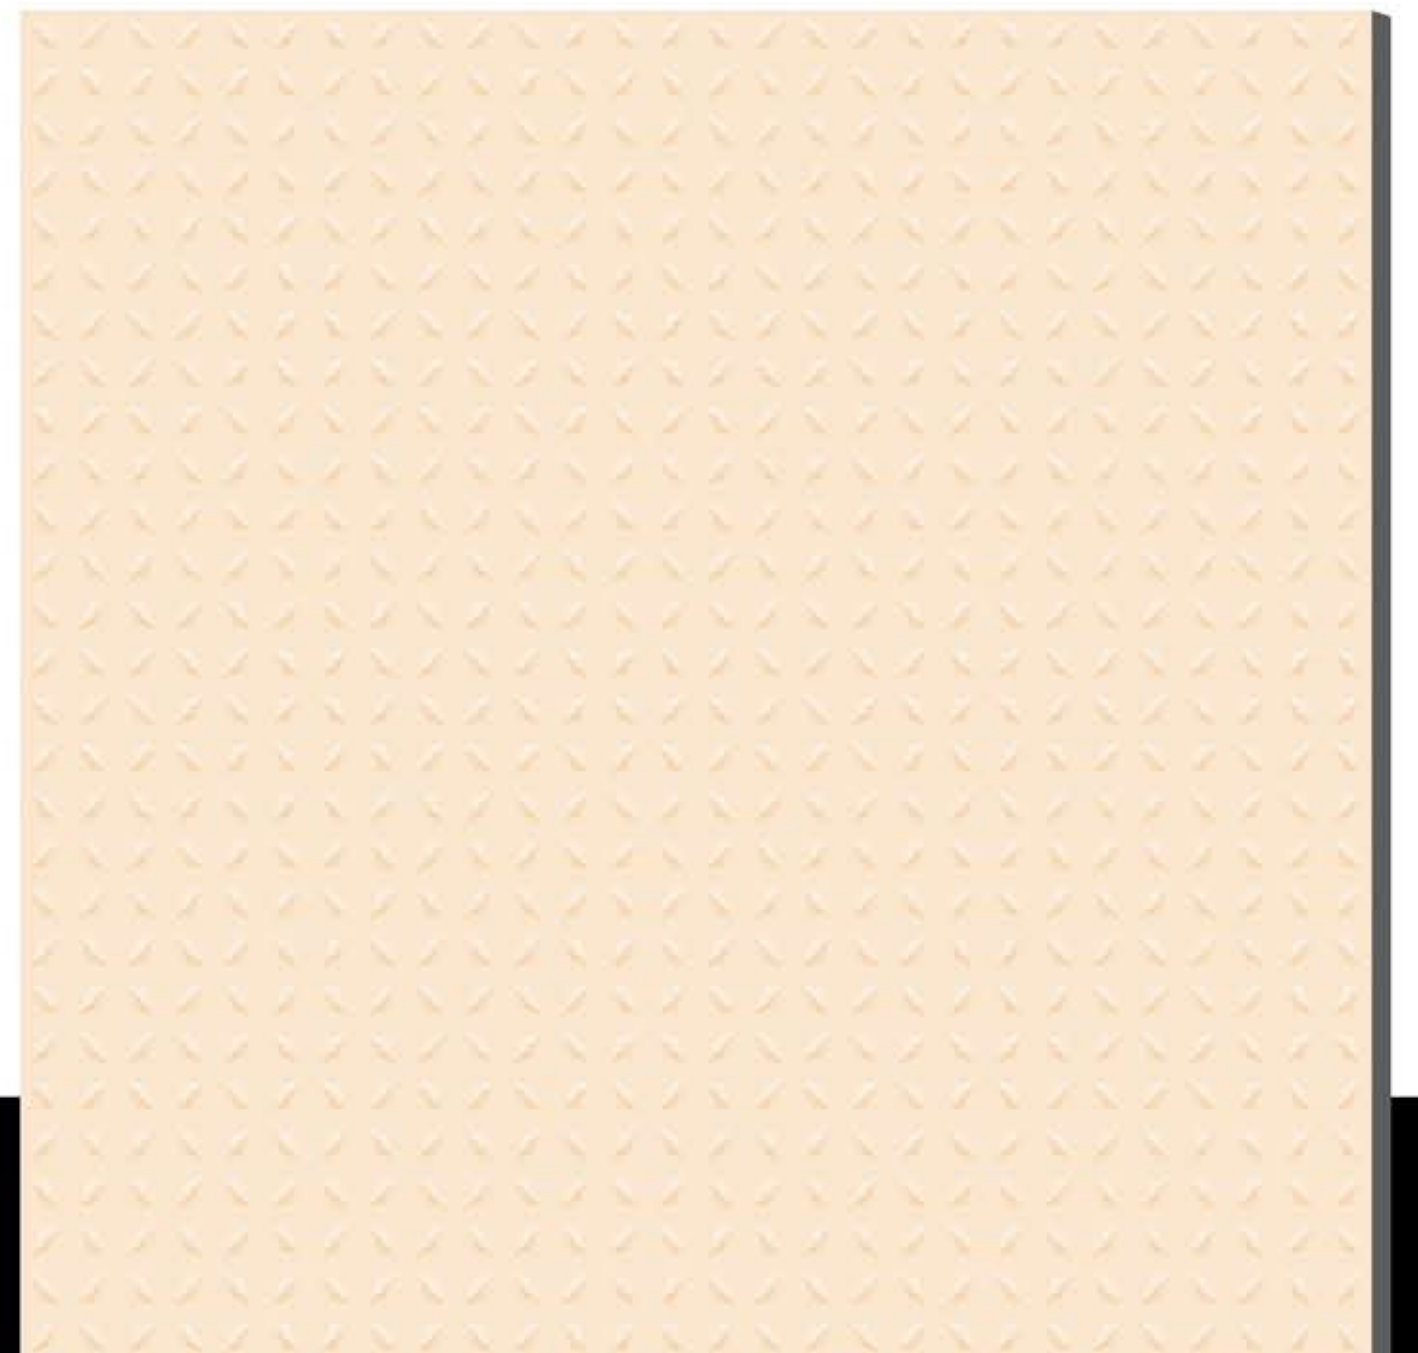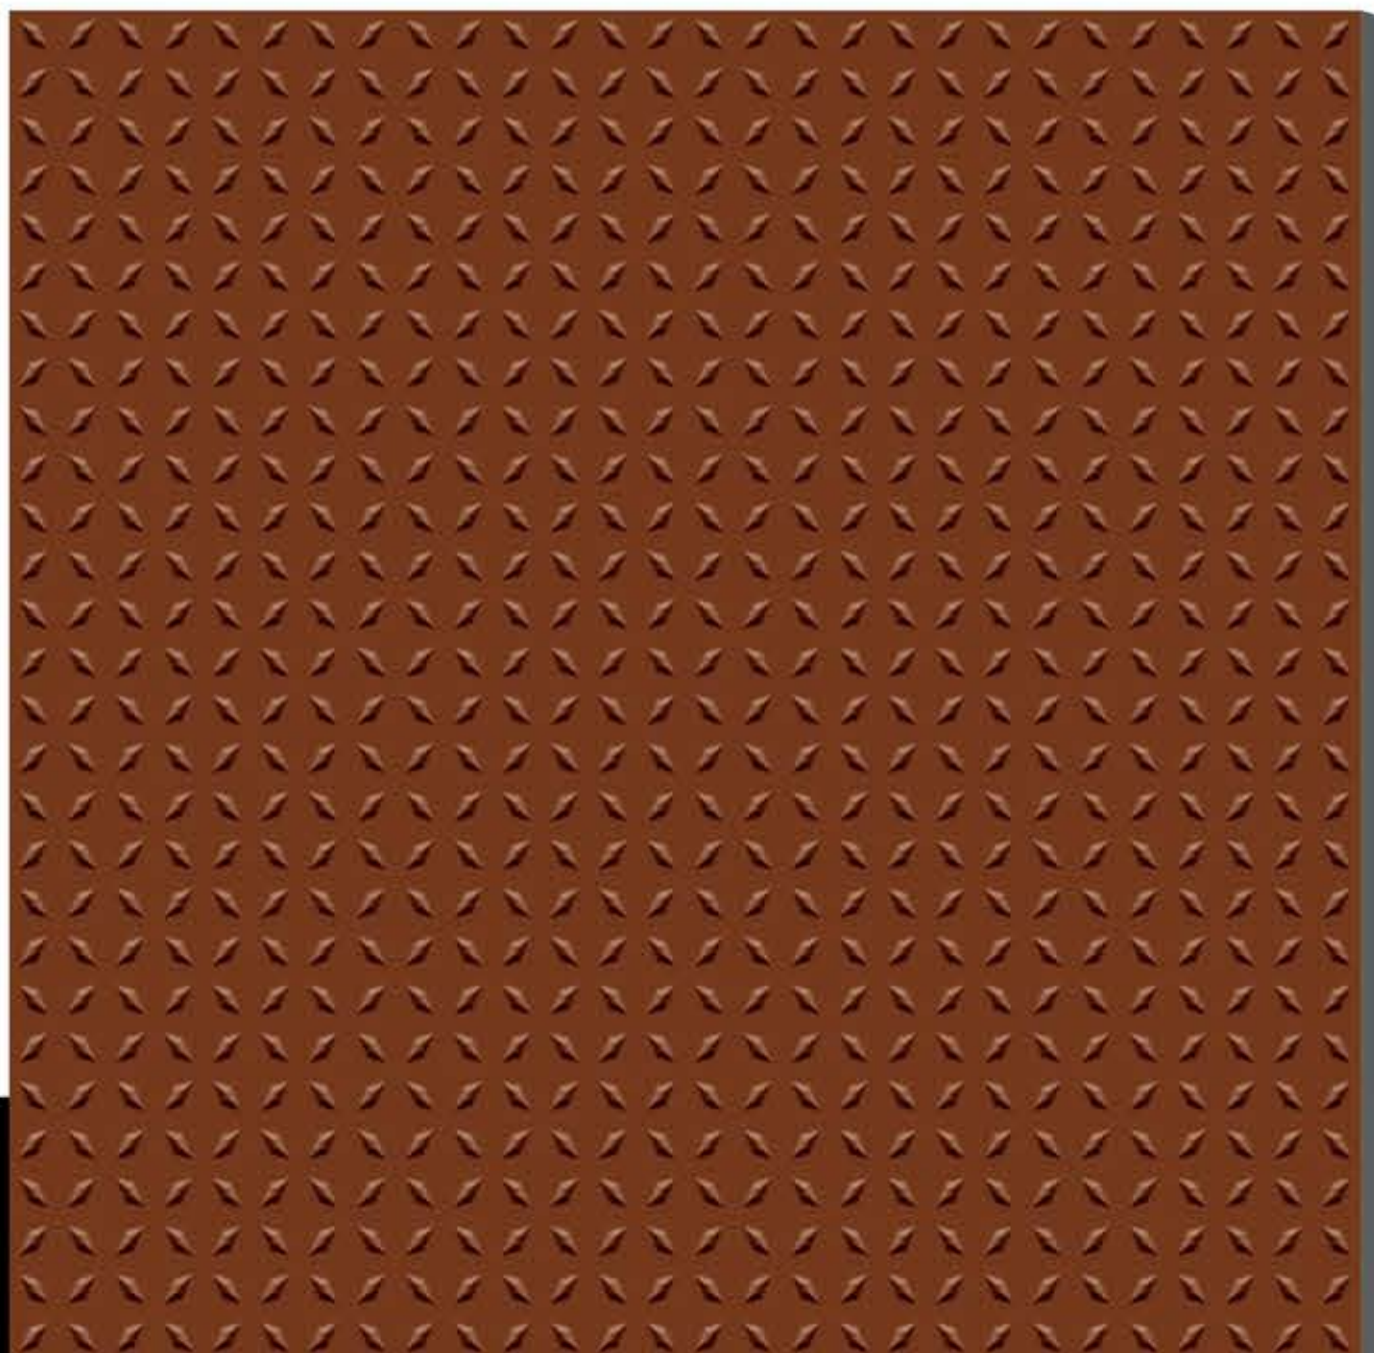

**MATT**  
**300x300mm**  
**IVORY, TERRACOTTA**

**975**




**976**

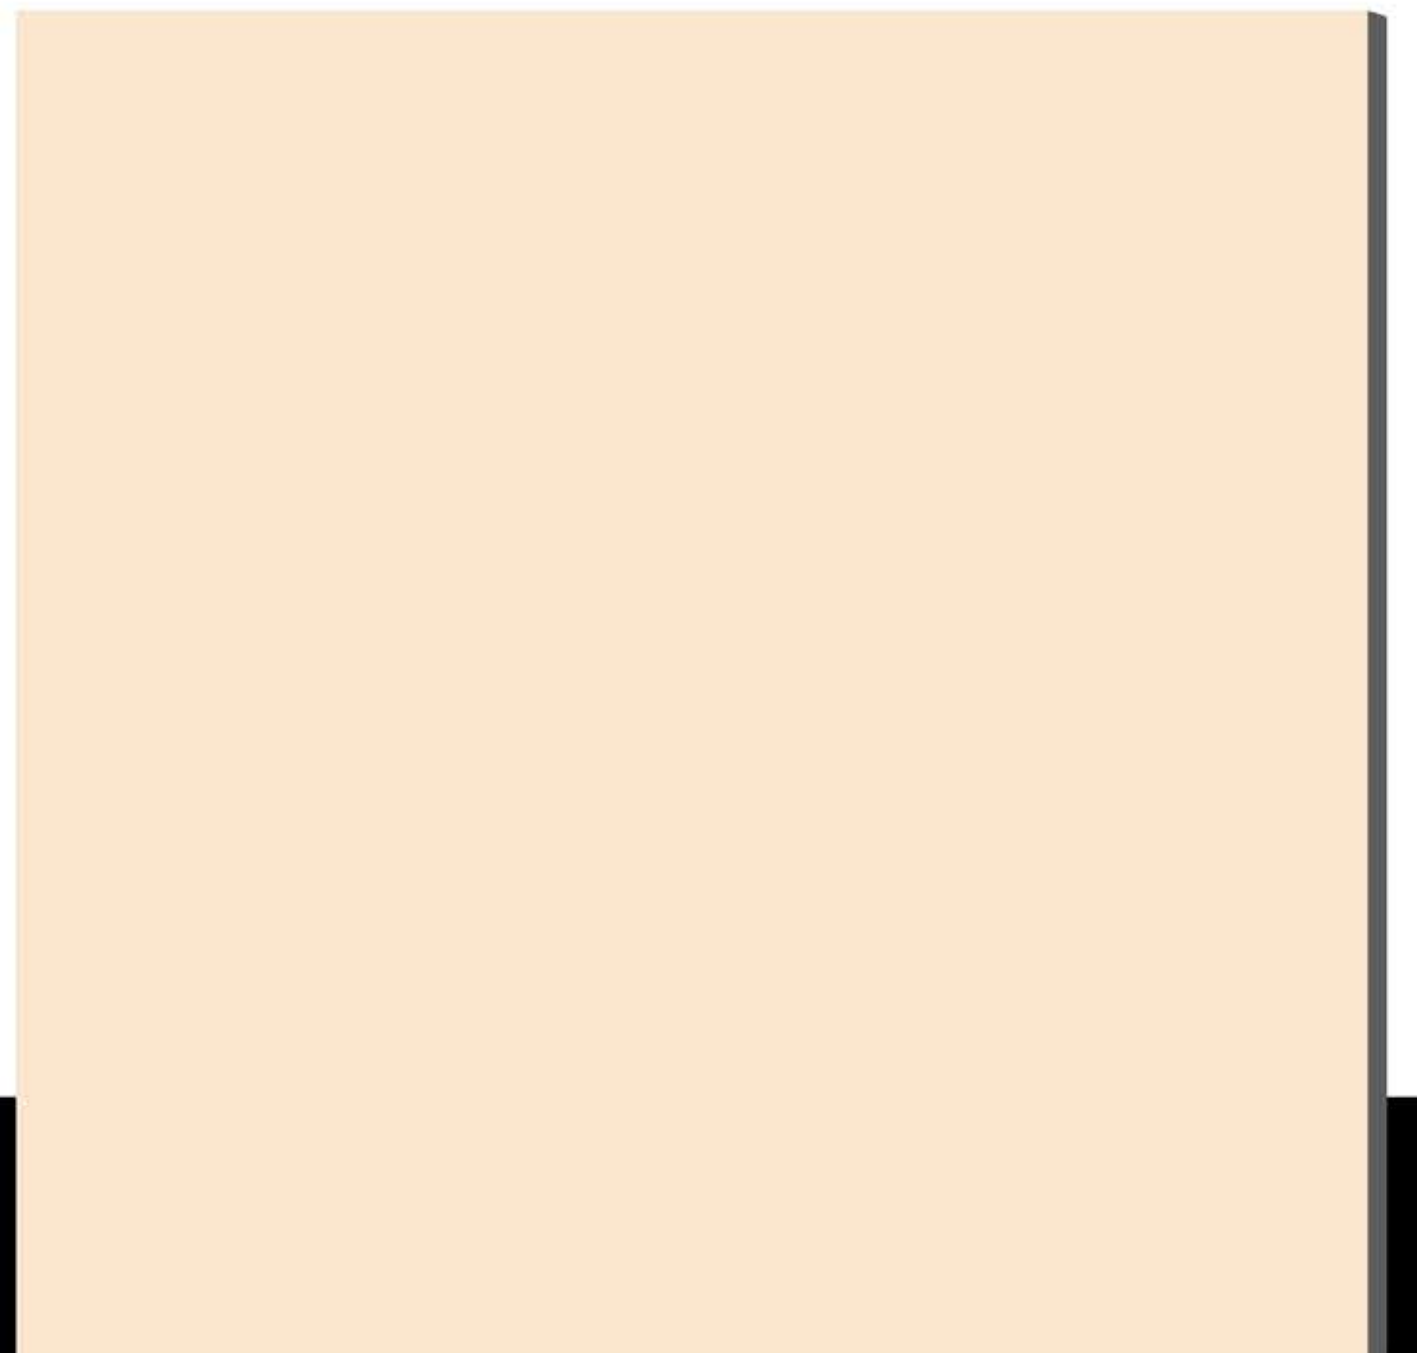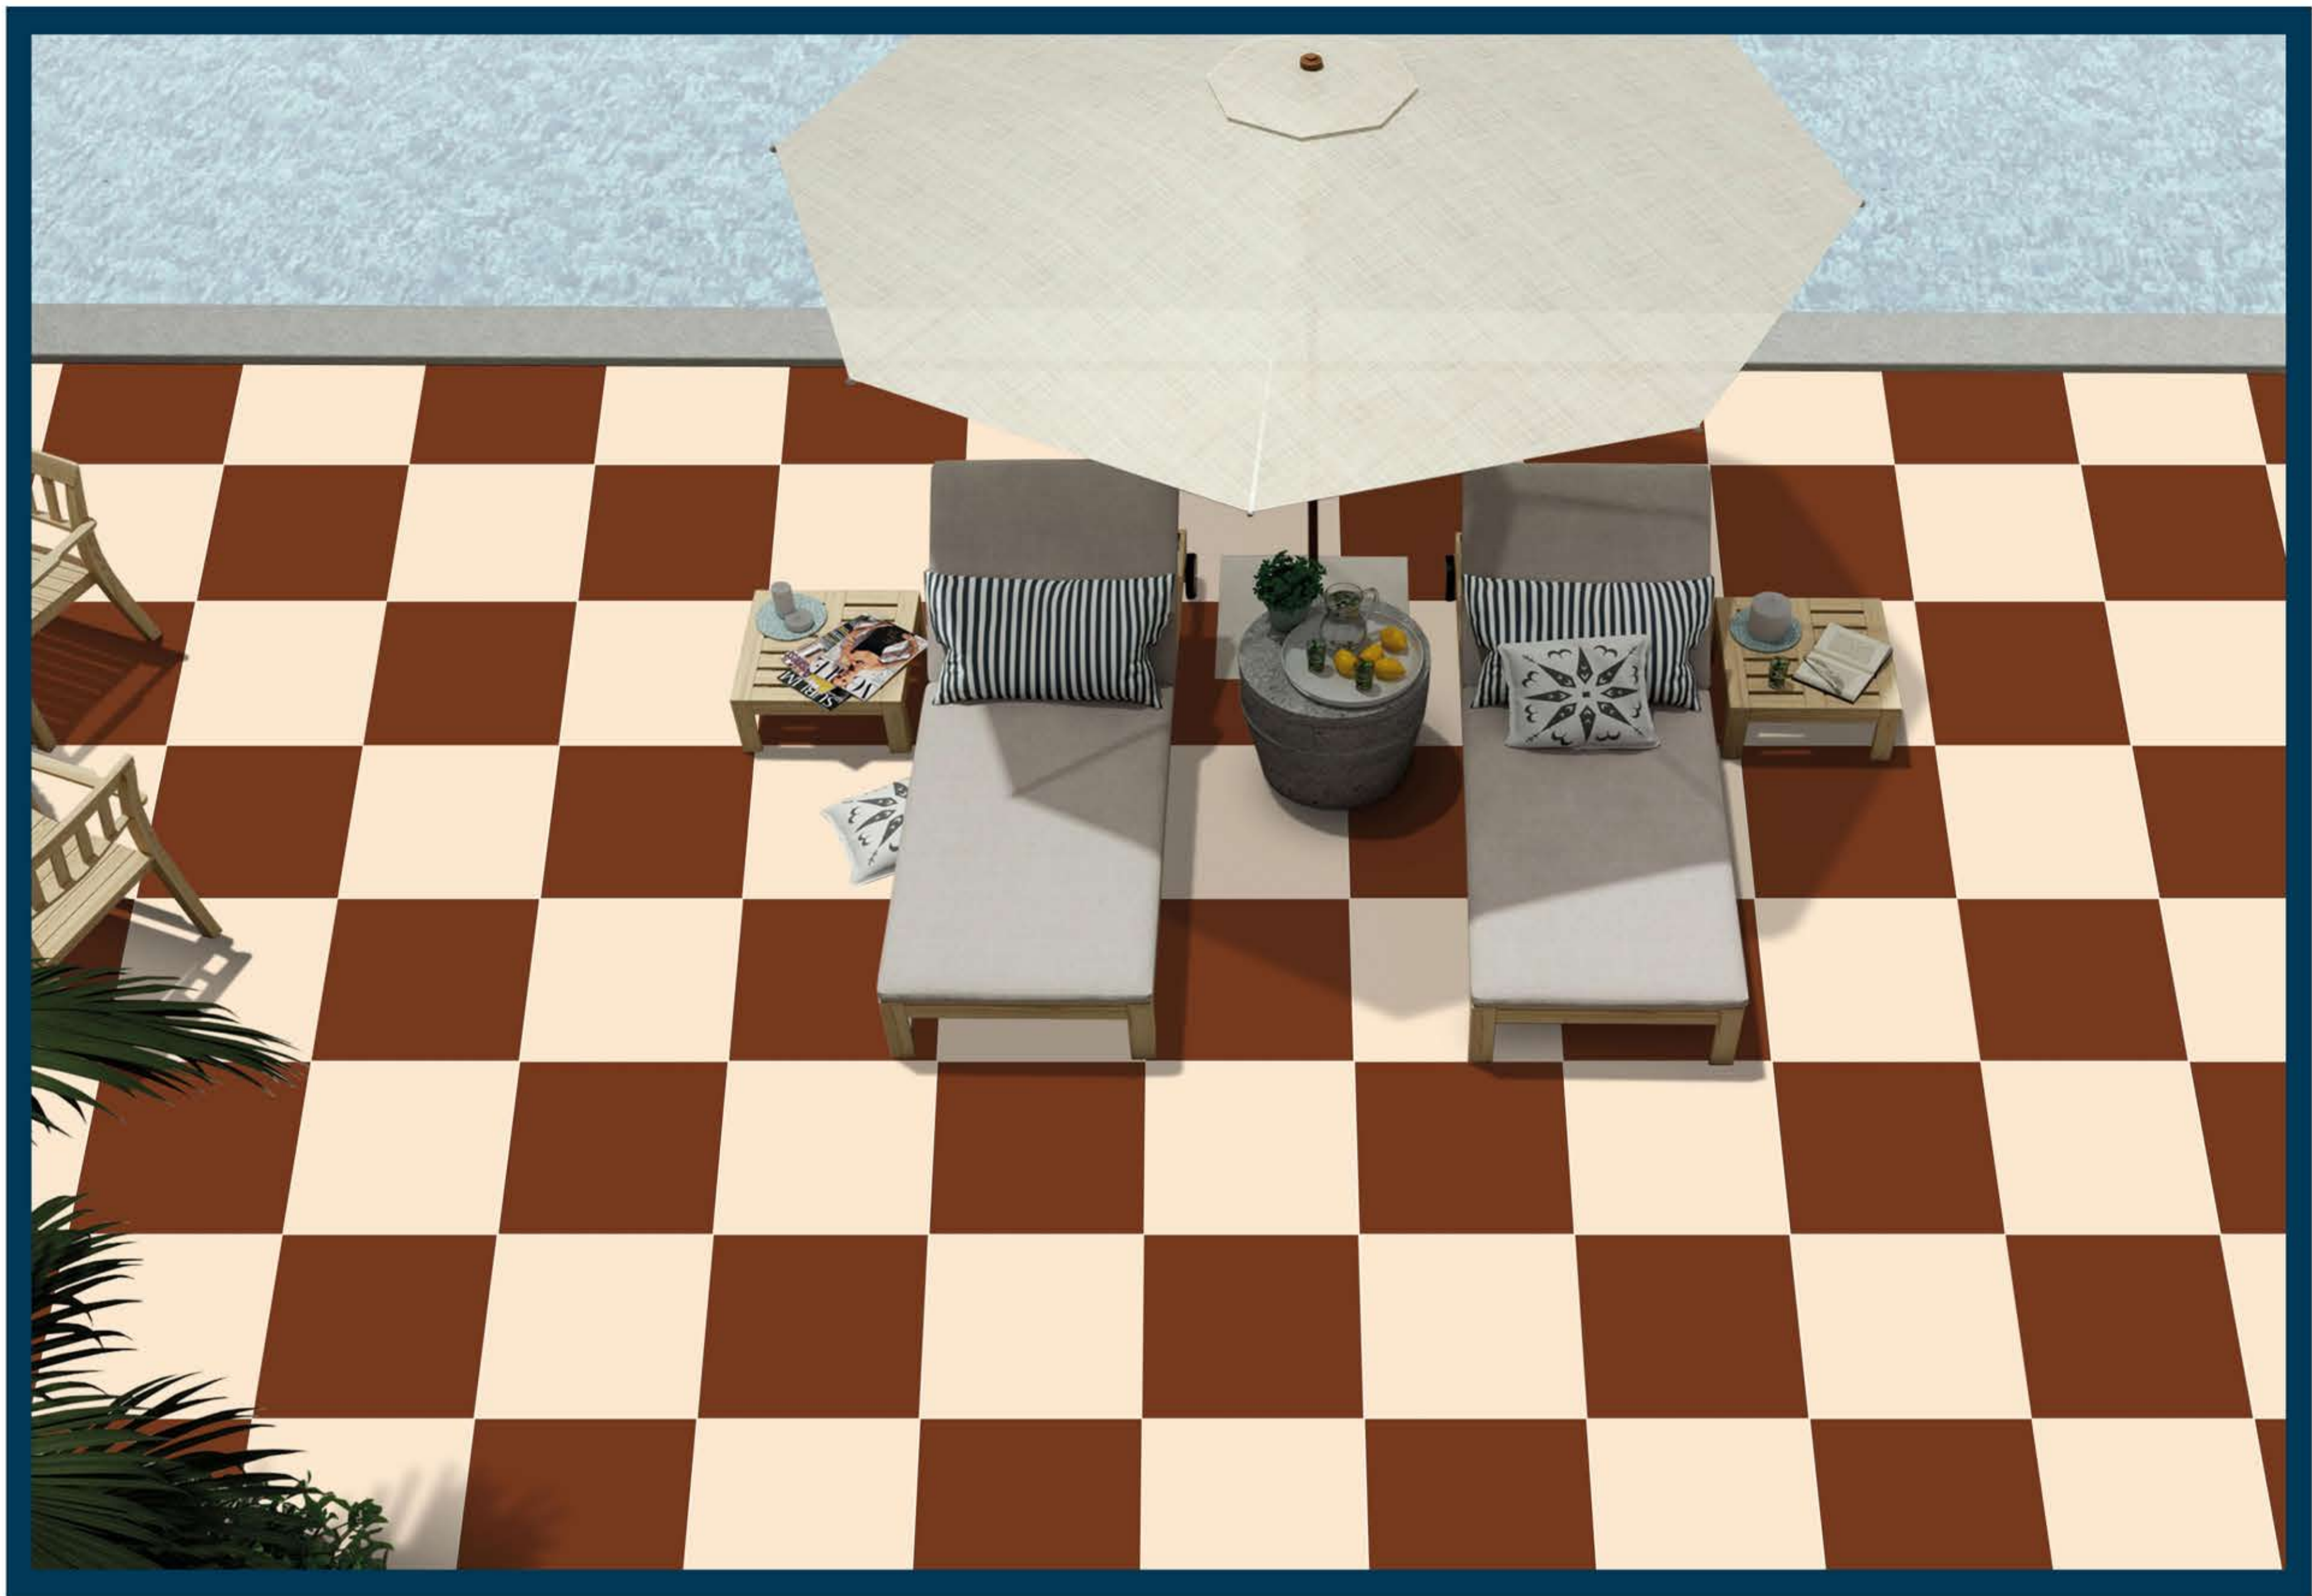

MATT  
300x300mm  
IVORY, TERRACOTTA

977

978

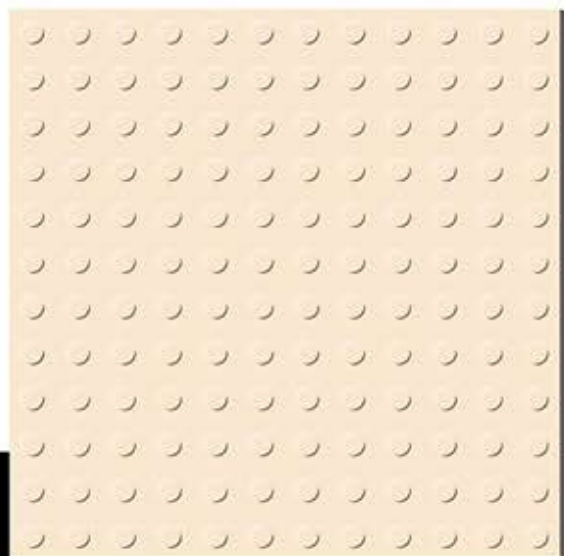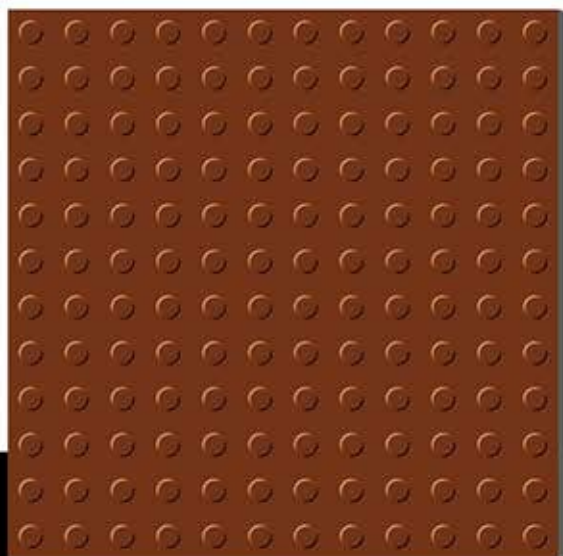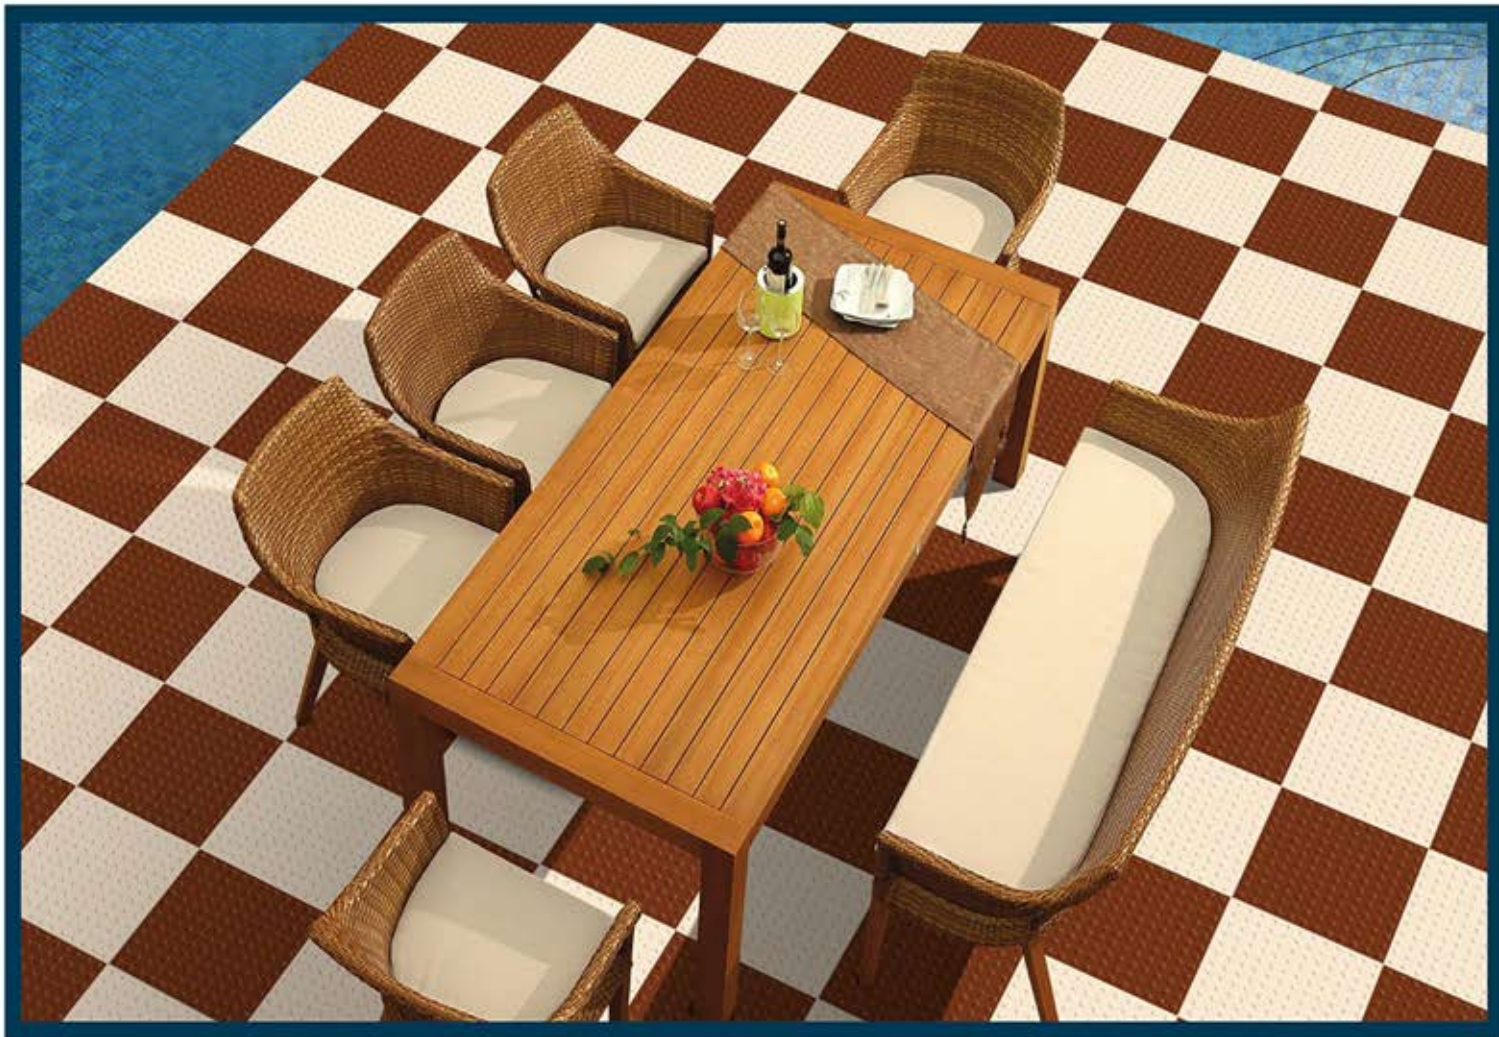

MATT  
300x300mm  
IVORY, TERRACOTTA

979

980

## Technical Specification

Sr. No.	Characteristics	EN:177B-II AIS:13755	SILVENTA VALUE
1	Deviation in Length	± 2.5%	± 0.1%
2	Deviation in Thickness	± 2.5%	± 1.0%
3	Wedging	± 1.0%	± 0.2%
4	Surface Flatness	± 1.5%	± 0.2%
5	Water Absorption	< 2.0%	< 0.5%
6	Mohs Hardness		8
7	Flexural Strength	> 20 N/mm <sup>2</sup>	> 45 N/mm <sup>2</sup>
8	Abrasion Resistance	< 204 mm <sup>2</sup> (EN 176)	< 144 mm <sup>2</sup>
9	Thermal Expansion	9x10.6 (EN 176)	6x10.6
10	Thermal Shock Resistance	No Damage	No Damage
11	Resistance to acid (Wt. Loss)	< 1.5%	< 0.4%
12	Skid Resistance (Friction coefficient)	> 0.4 (EN 176)	> 0.6
13	Breaking Strength	± 2.5%	400 Kg/cm <sup>2</sup>
14	Stain Resistance	Resistant (EN 176)	Resistant
15	Moisture Expansion	Nil (EN 176)	Nil

Note : 1. Our conformity to the above standards is applicable only for premium quality.

## Packing Detail

Sr. No.	Size	Thickness (mm) <sub>(Approx)</sub>	Pieces Per Box	Area/Box Sq. ft.	Area/Box Sq. mt.	Wt./Box Kgs. (Approx)
1	300mm x 300mm (12"x12" )	9.00	8	7.75	0.72	13.500
1	300mm x 300mm (DG )	9.00	8	7.75	0.72	13.500
1	300mm x 300mm (DG )	9.00	8	7.75	0.72	13.500

Note :

1. Certain amount of size and shade variation is inherent in all ceramic products.
2. Our conformity to the above First is applicable only for Quality.
3. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company dose not accept responsibility once the tiles are laid.

## Features :




Suitable For Floor



Frost Resistance



Anti Slip



Break Resistance



Easy To Install



Chemical Resistance



Resistance To Abrasion



Maintenance Free



Eco Friendly

**FOTIA**<sup>TM</sup>  
CERAMICA

**Mfg. of Digital Parking Tiles**

📍 8-A, National Highway,  
B/h. Lalpar GEB, Jambudiya,  
Morbi - 363 642 (Gujarat) INDIA

🌐 [www.lorenatiles.com](http://www.lorenatiles.com)

✉ [info@lorenatiles.com](mailto:info@lorenatiles.com)

**THANK YOU...**

