


FOTIATM
CERAMICA



**COLLECTION
2022**

GREEN X STONE

300^x
300MM

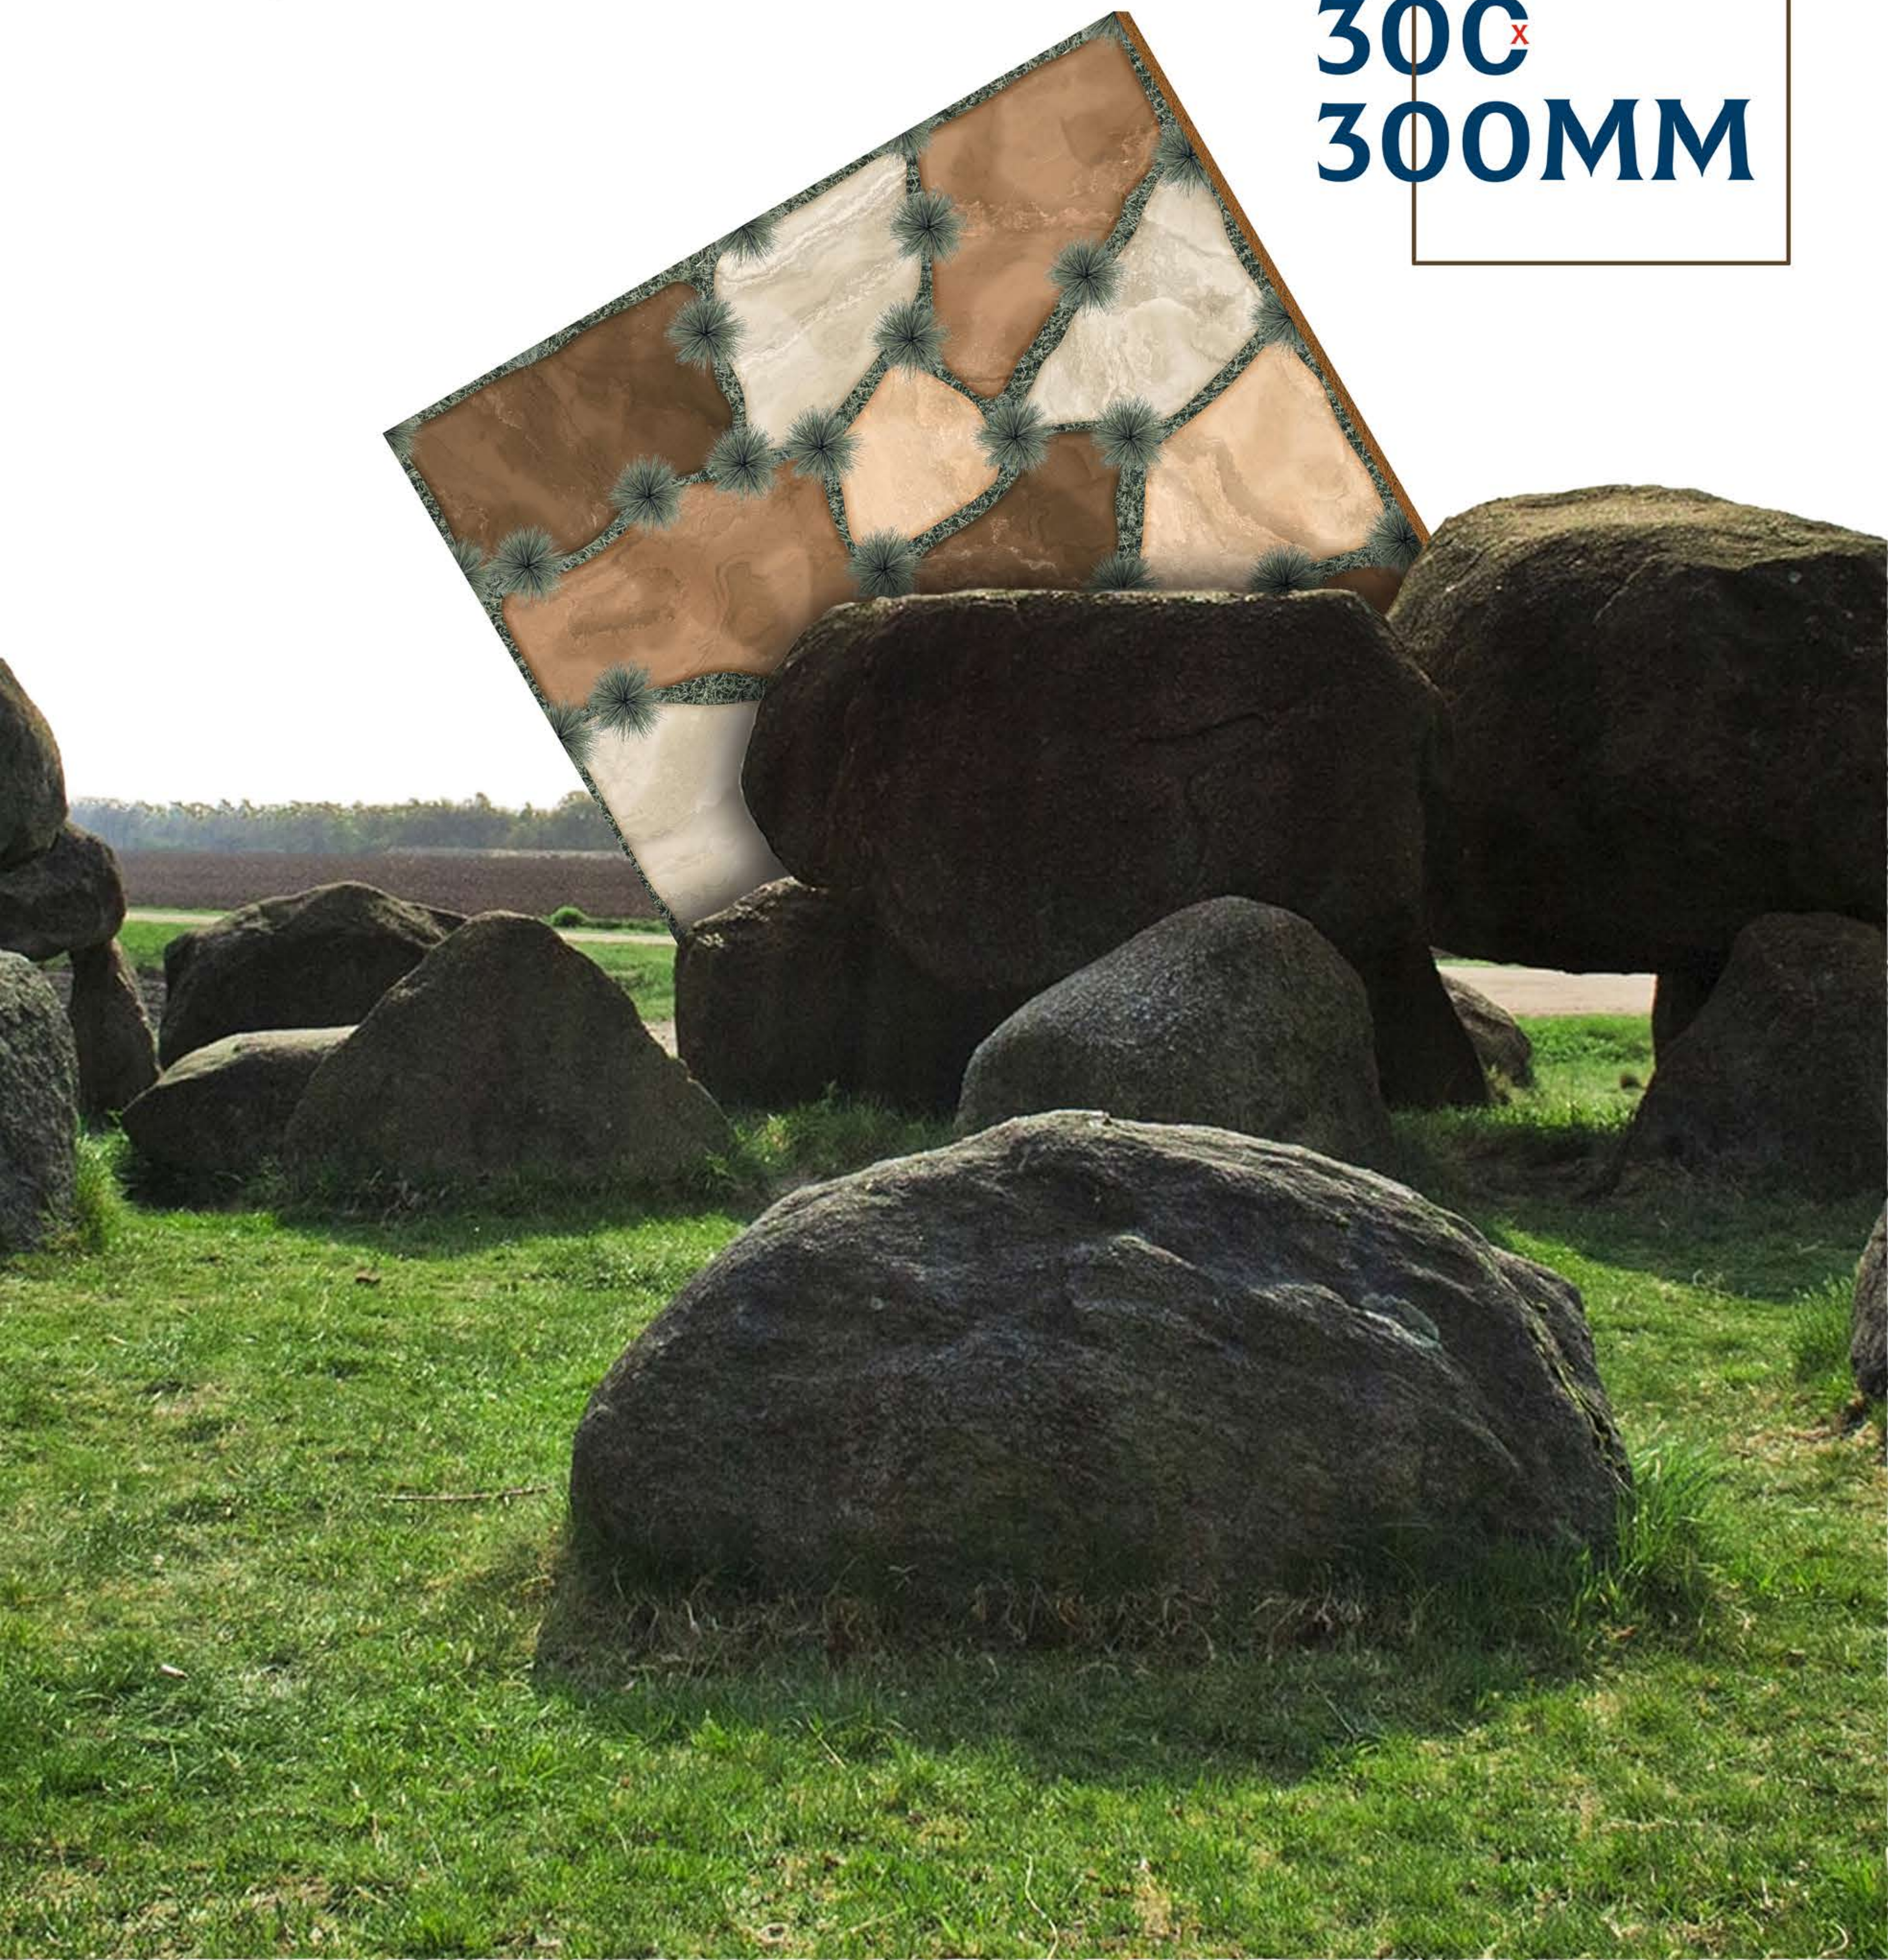




MOROCCAN SERIES




MATT
300x300mm
DIGITAL PARKING TILES

651

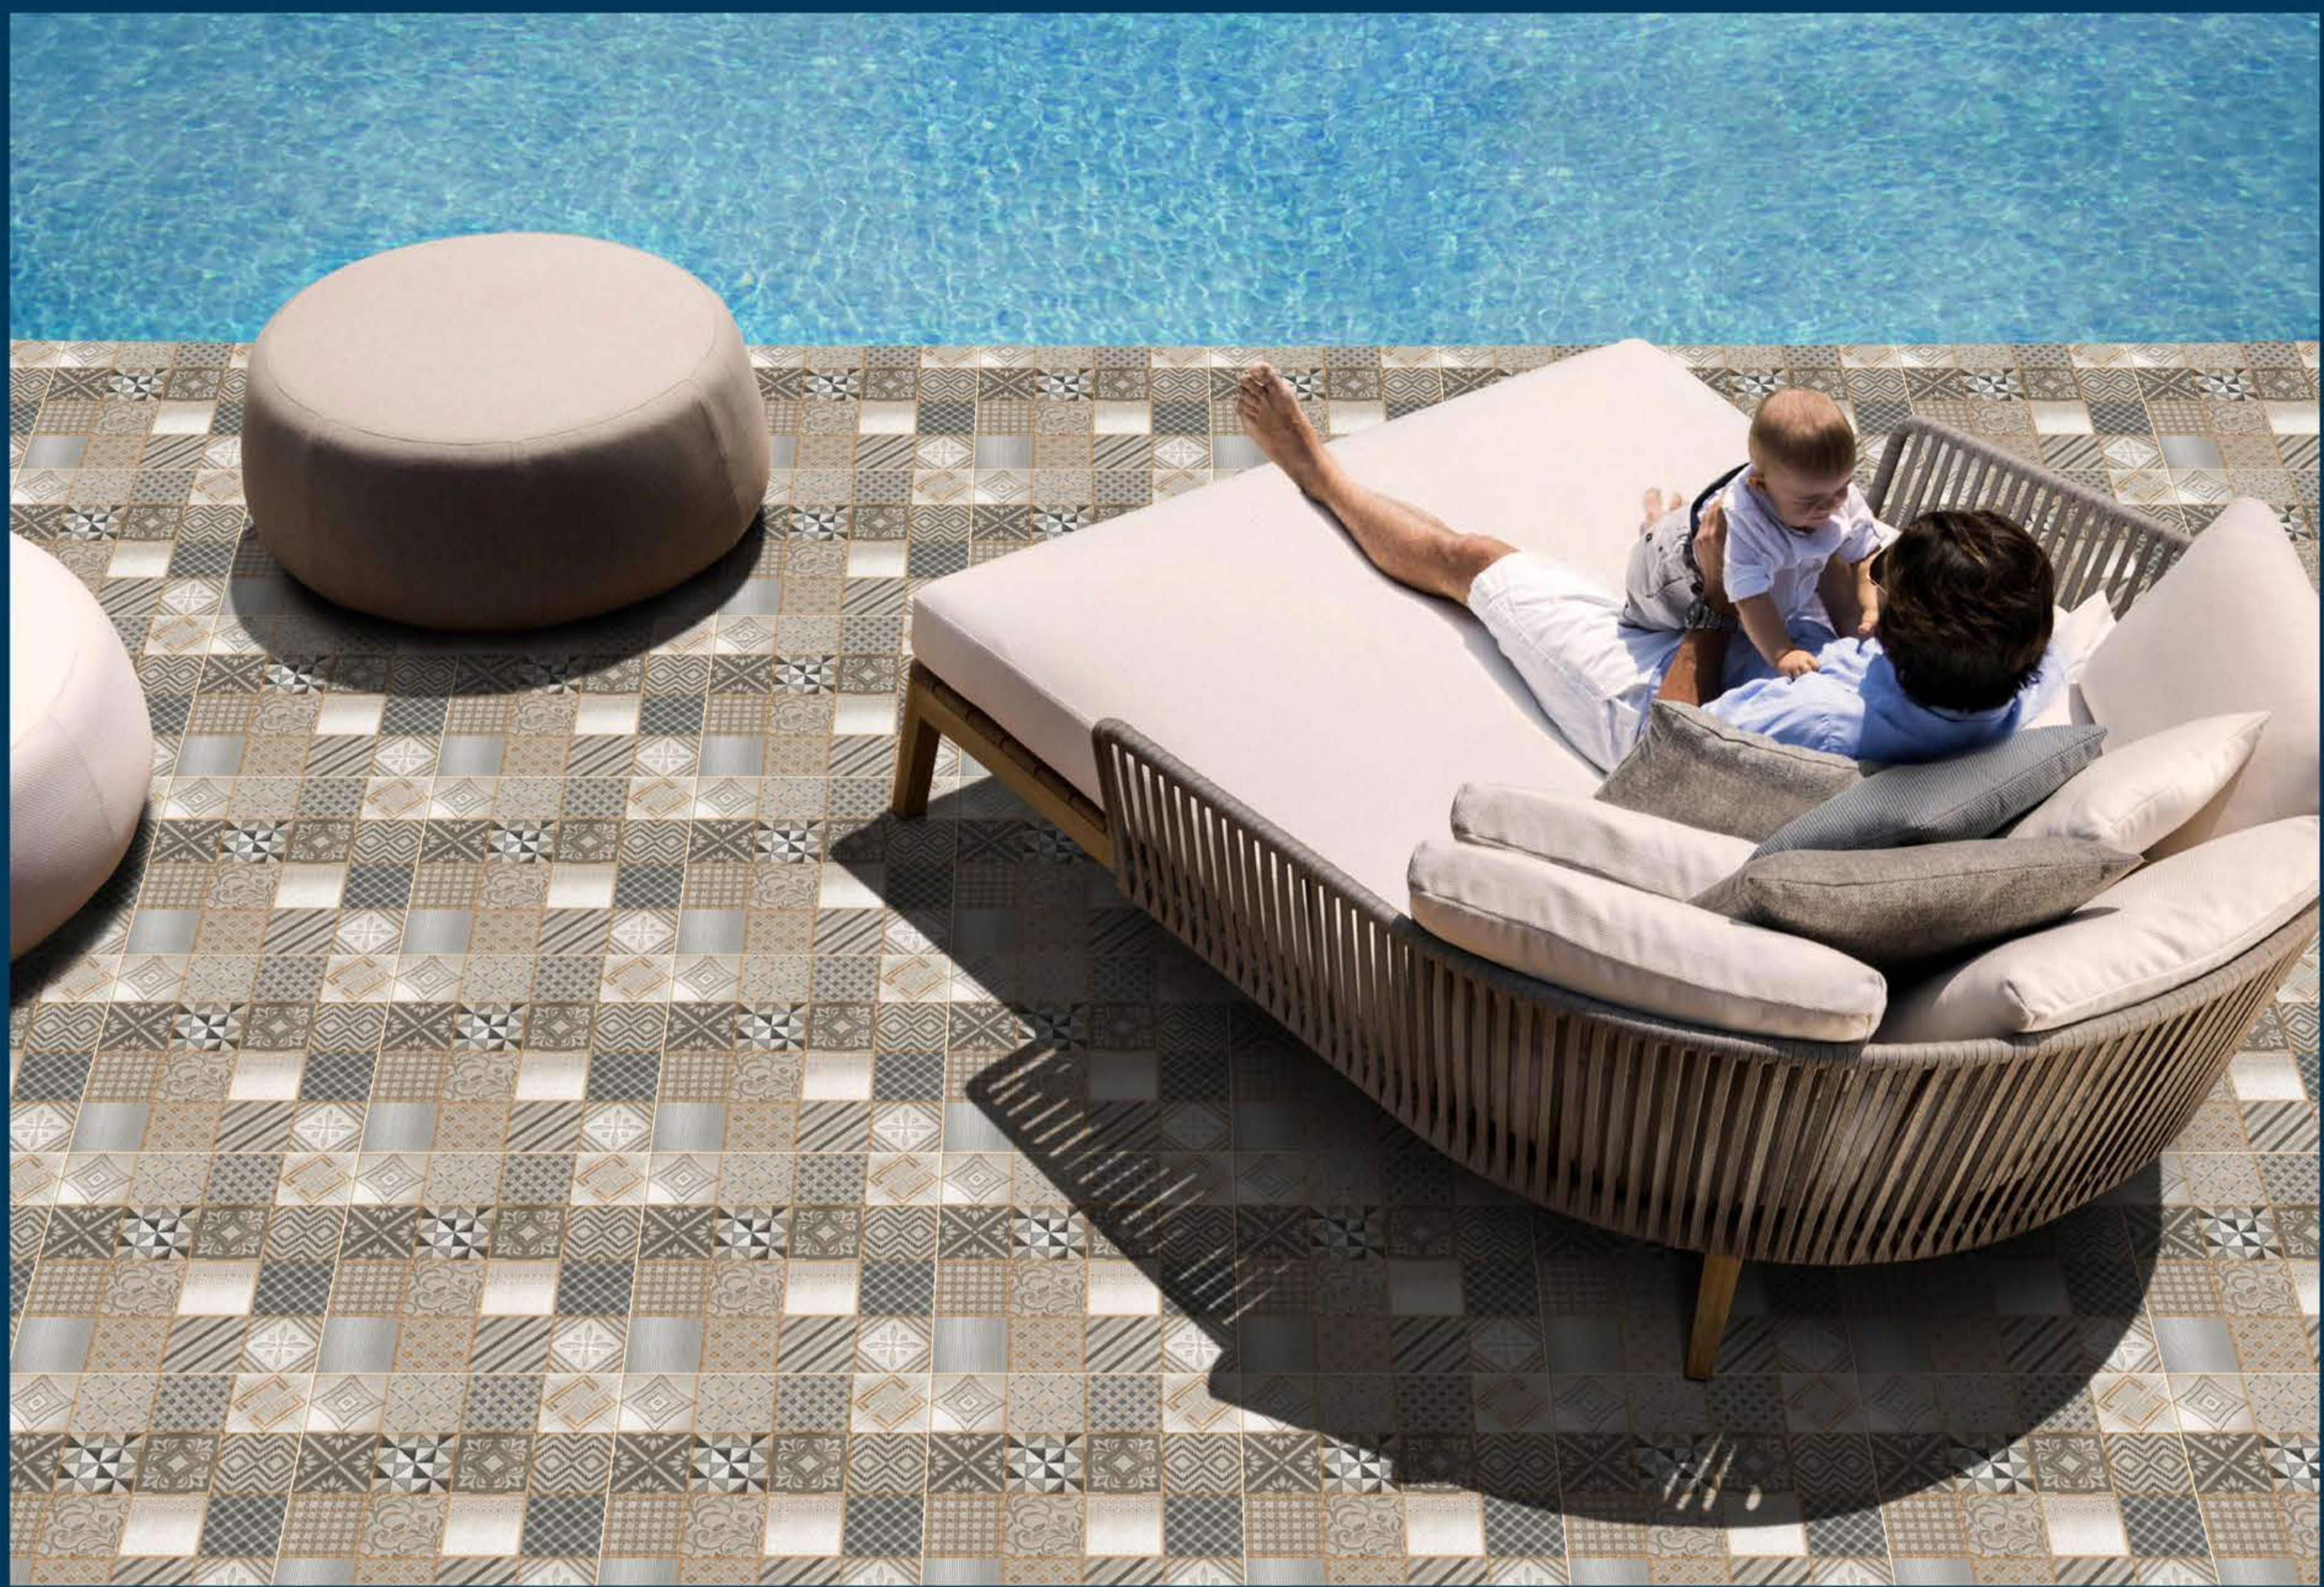

MOROCCAN SERIES

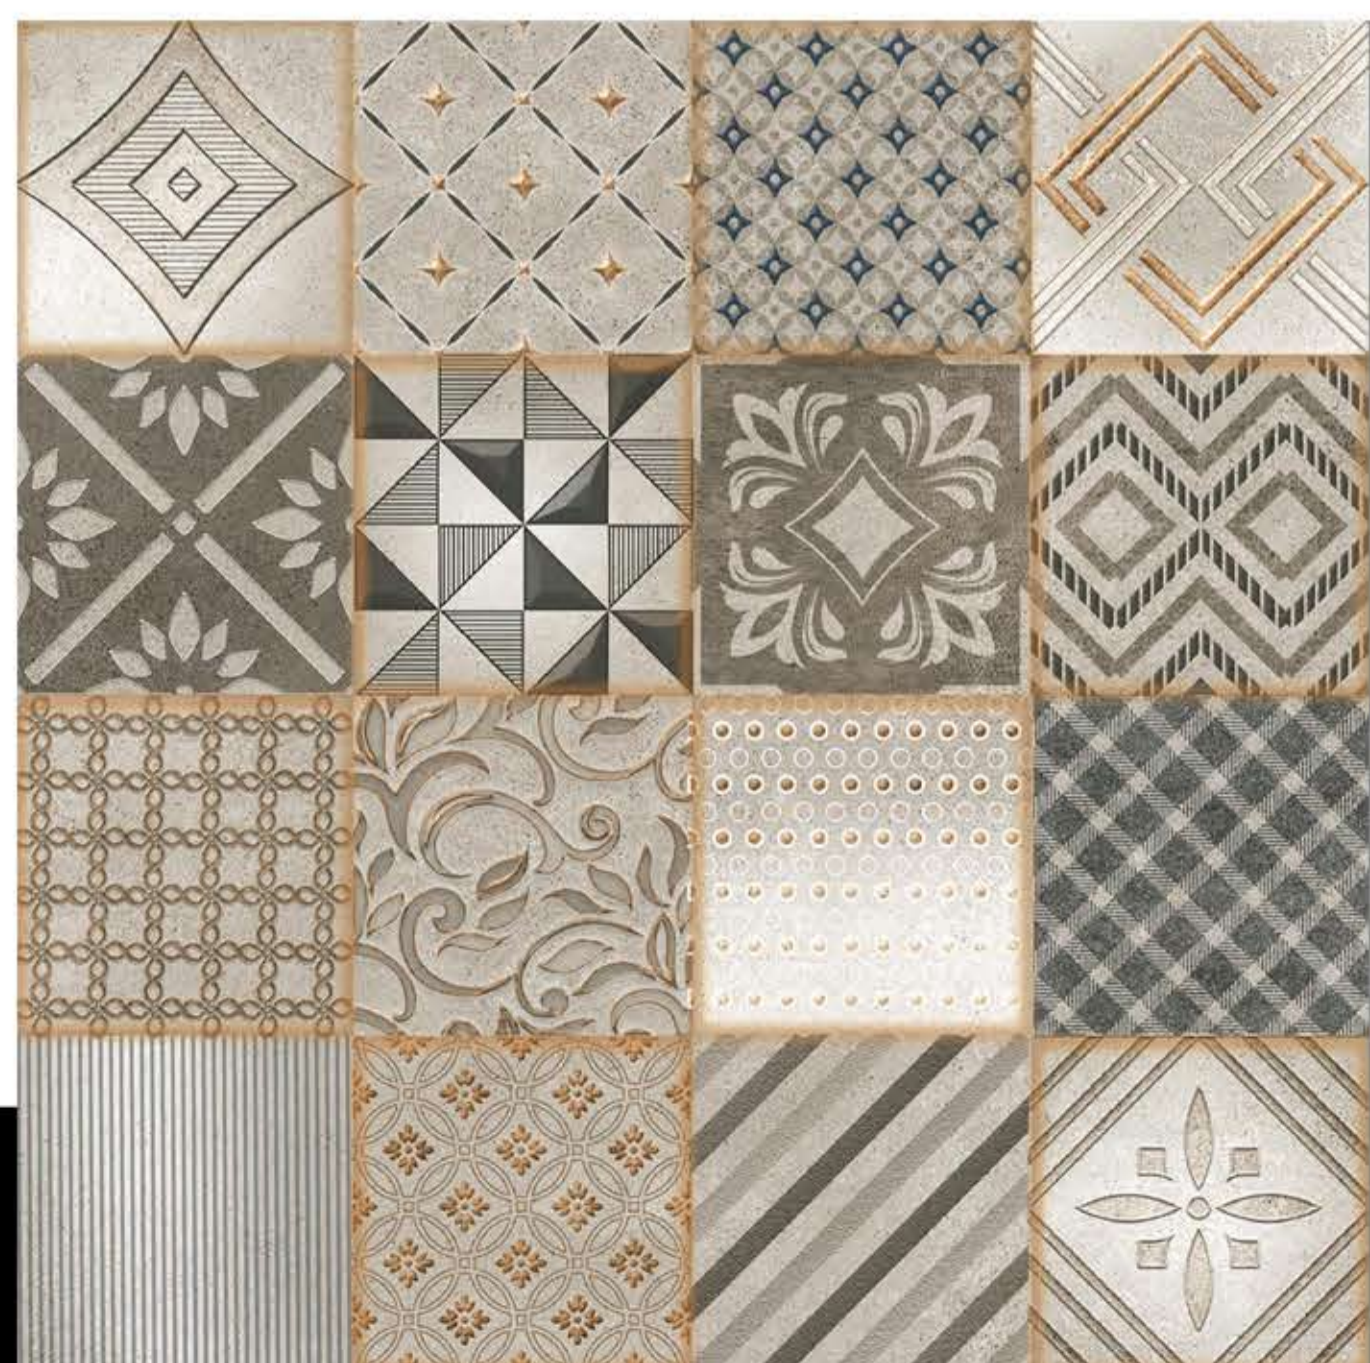

MATT
300x300mm
DIGITAL PARKING TILES

652




MOROCCAN SERIES




MATT
300x300mm
DIGITAL PARKING TILES

653

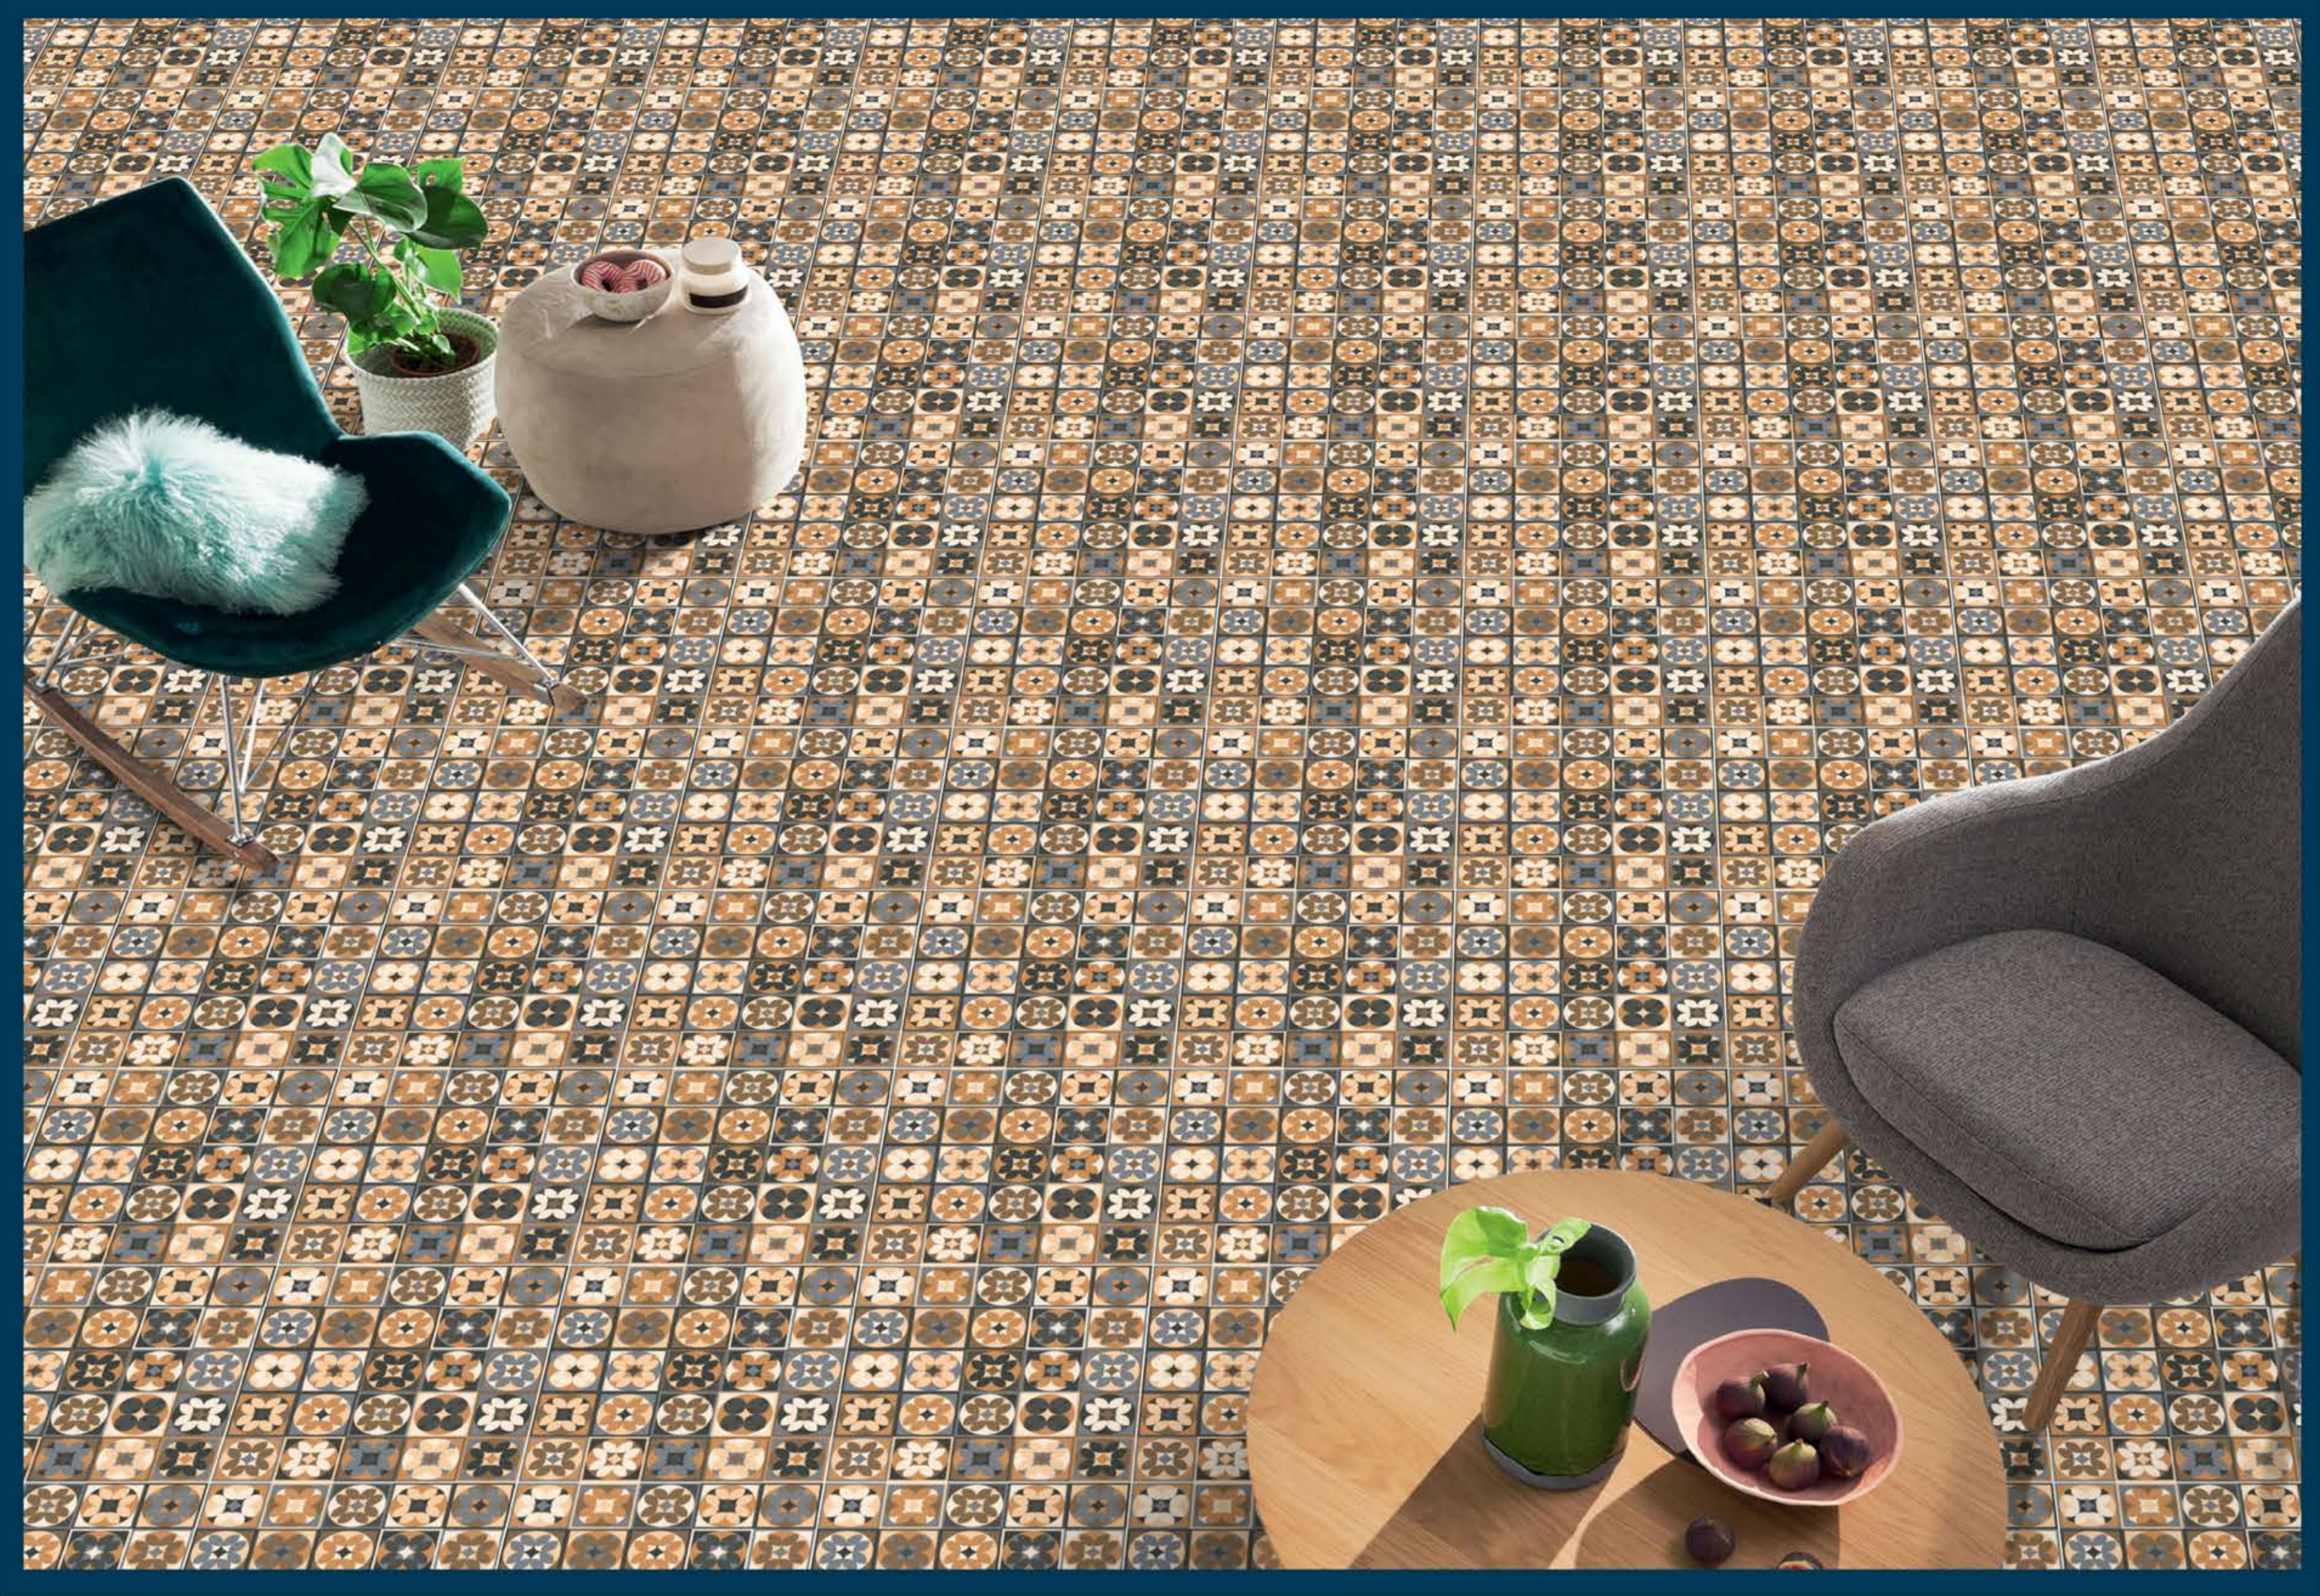


MOROCCAN SERIES

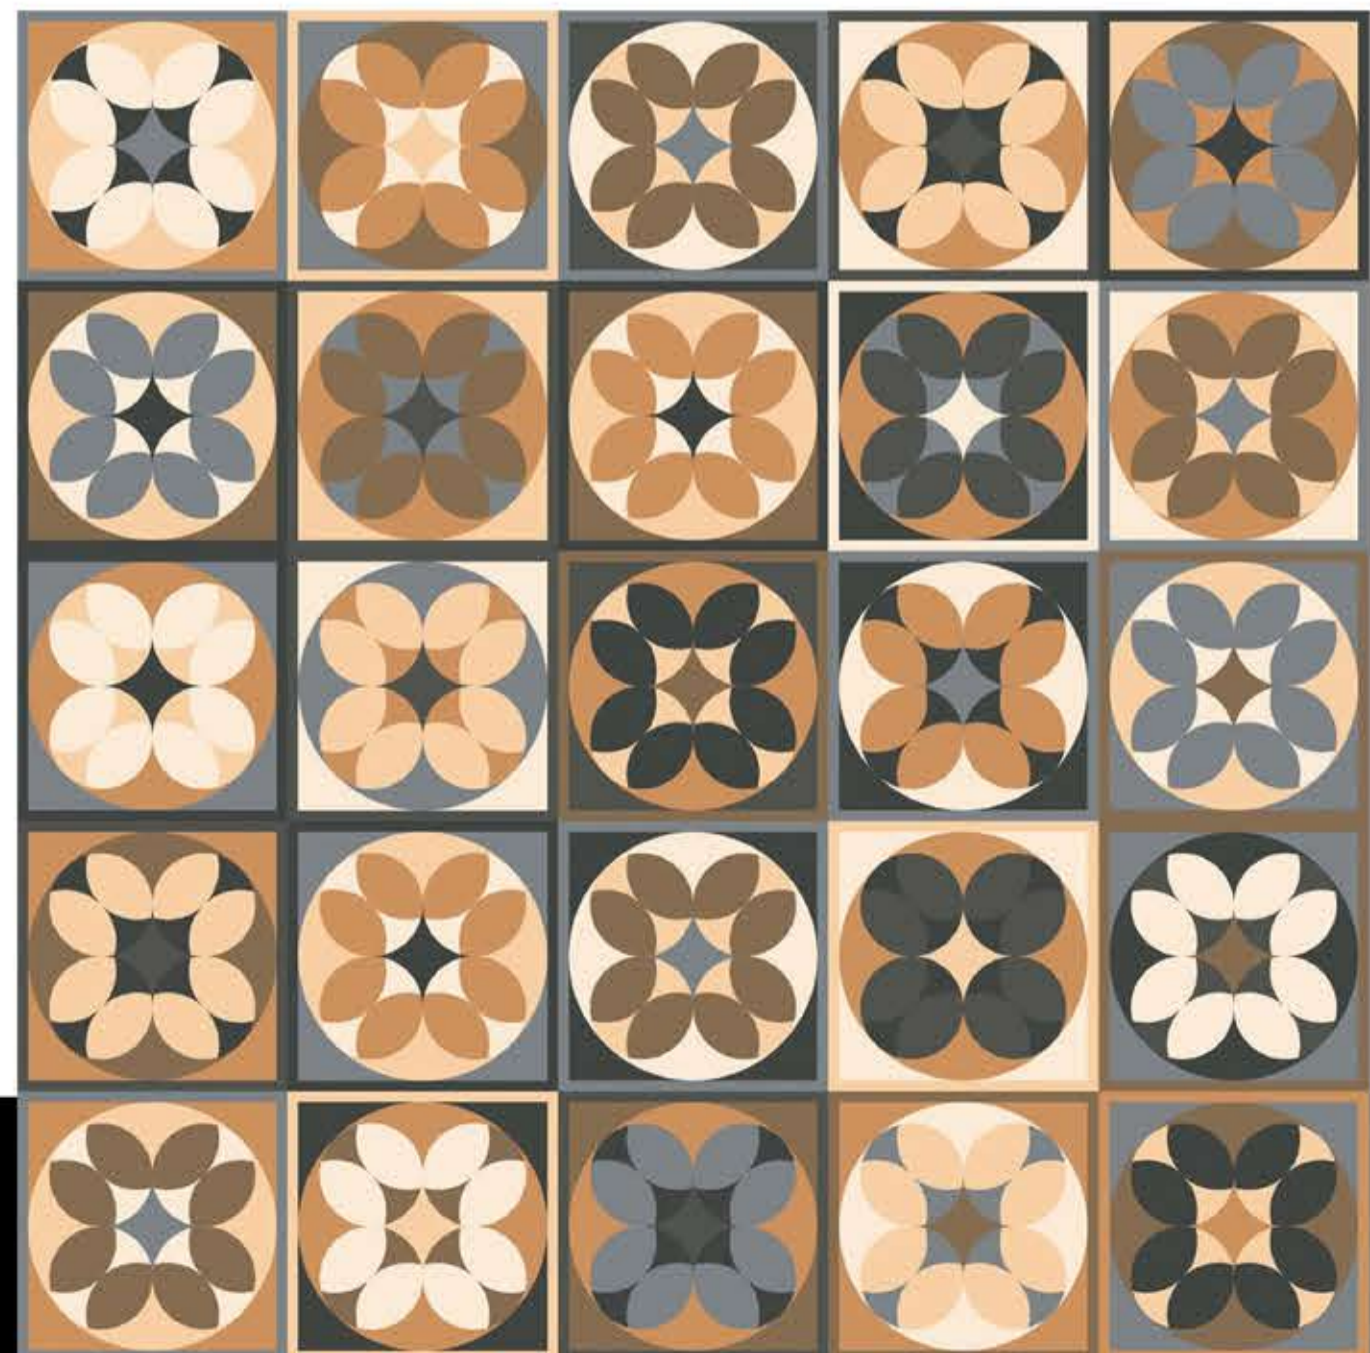

MATT
300x300mm
DIGITAL PARKING TILES

654

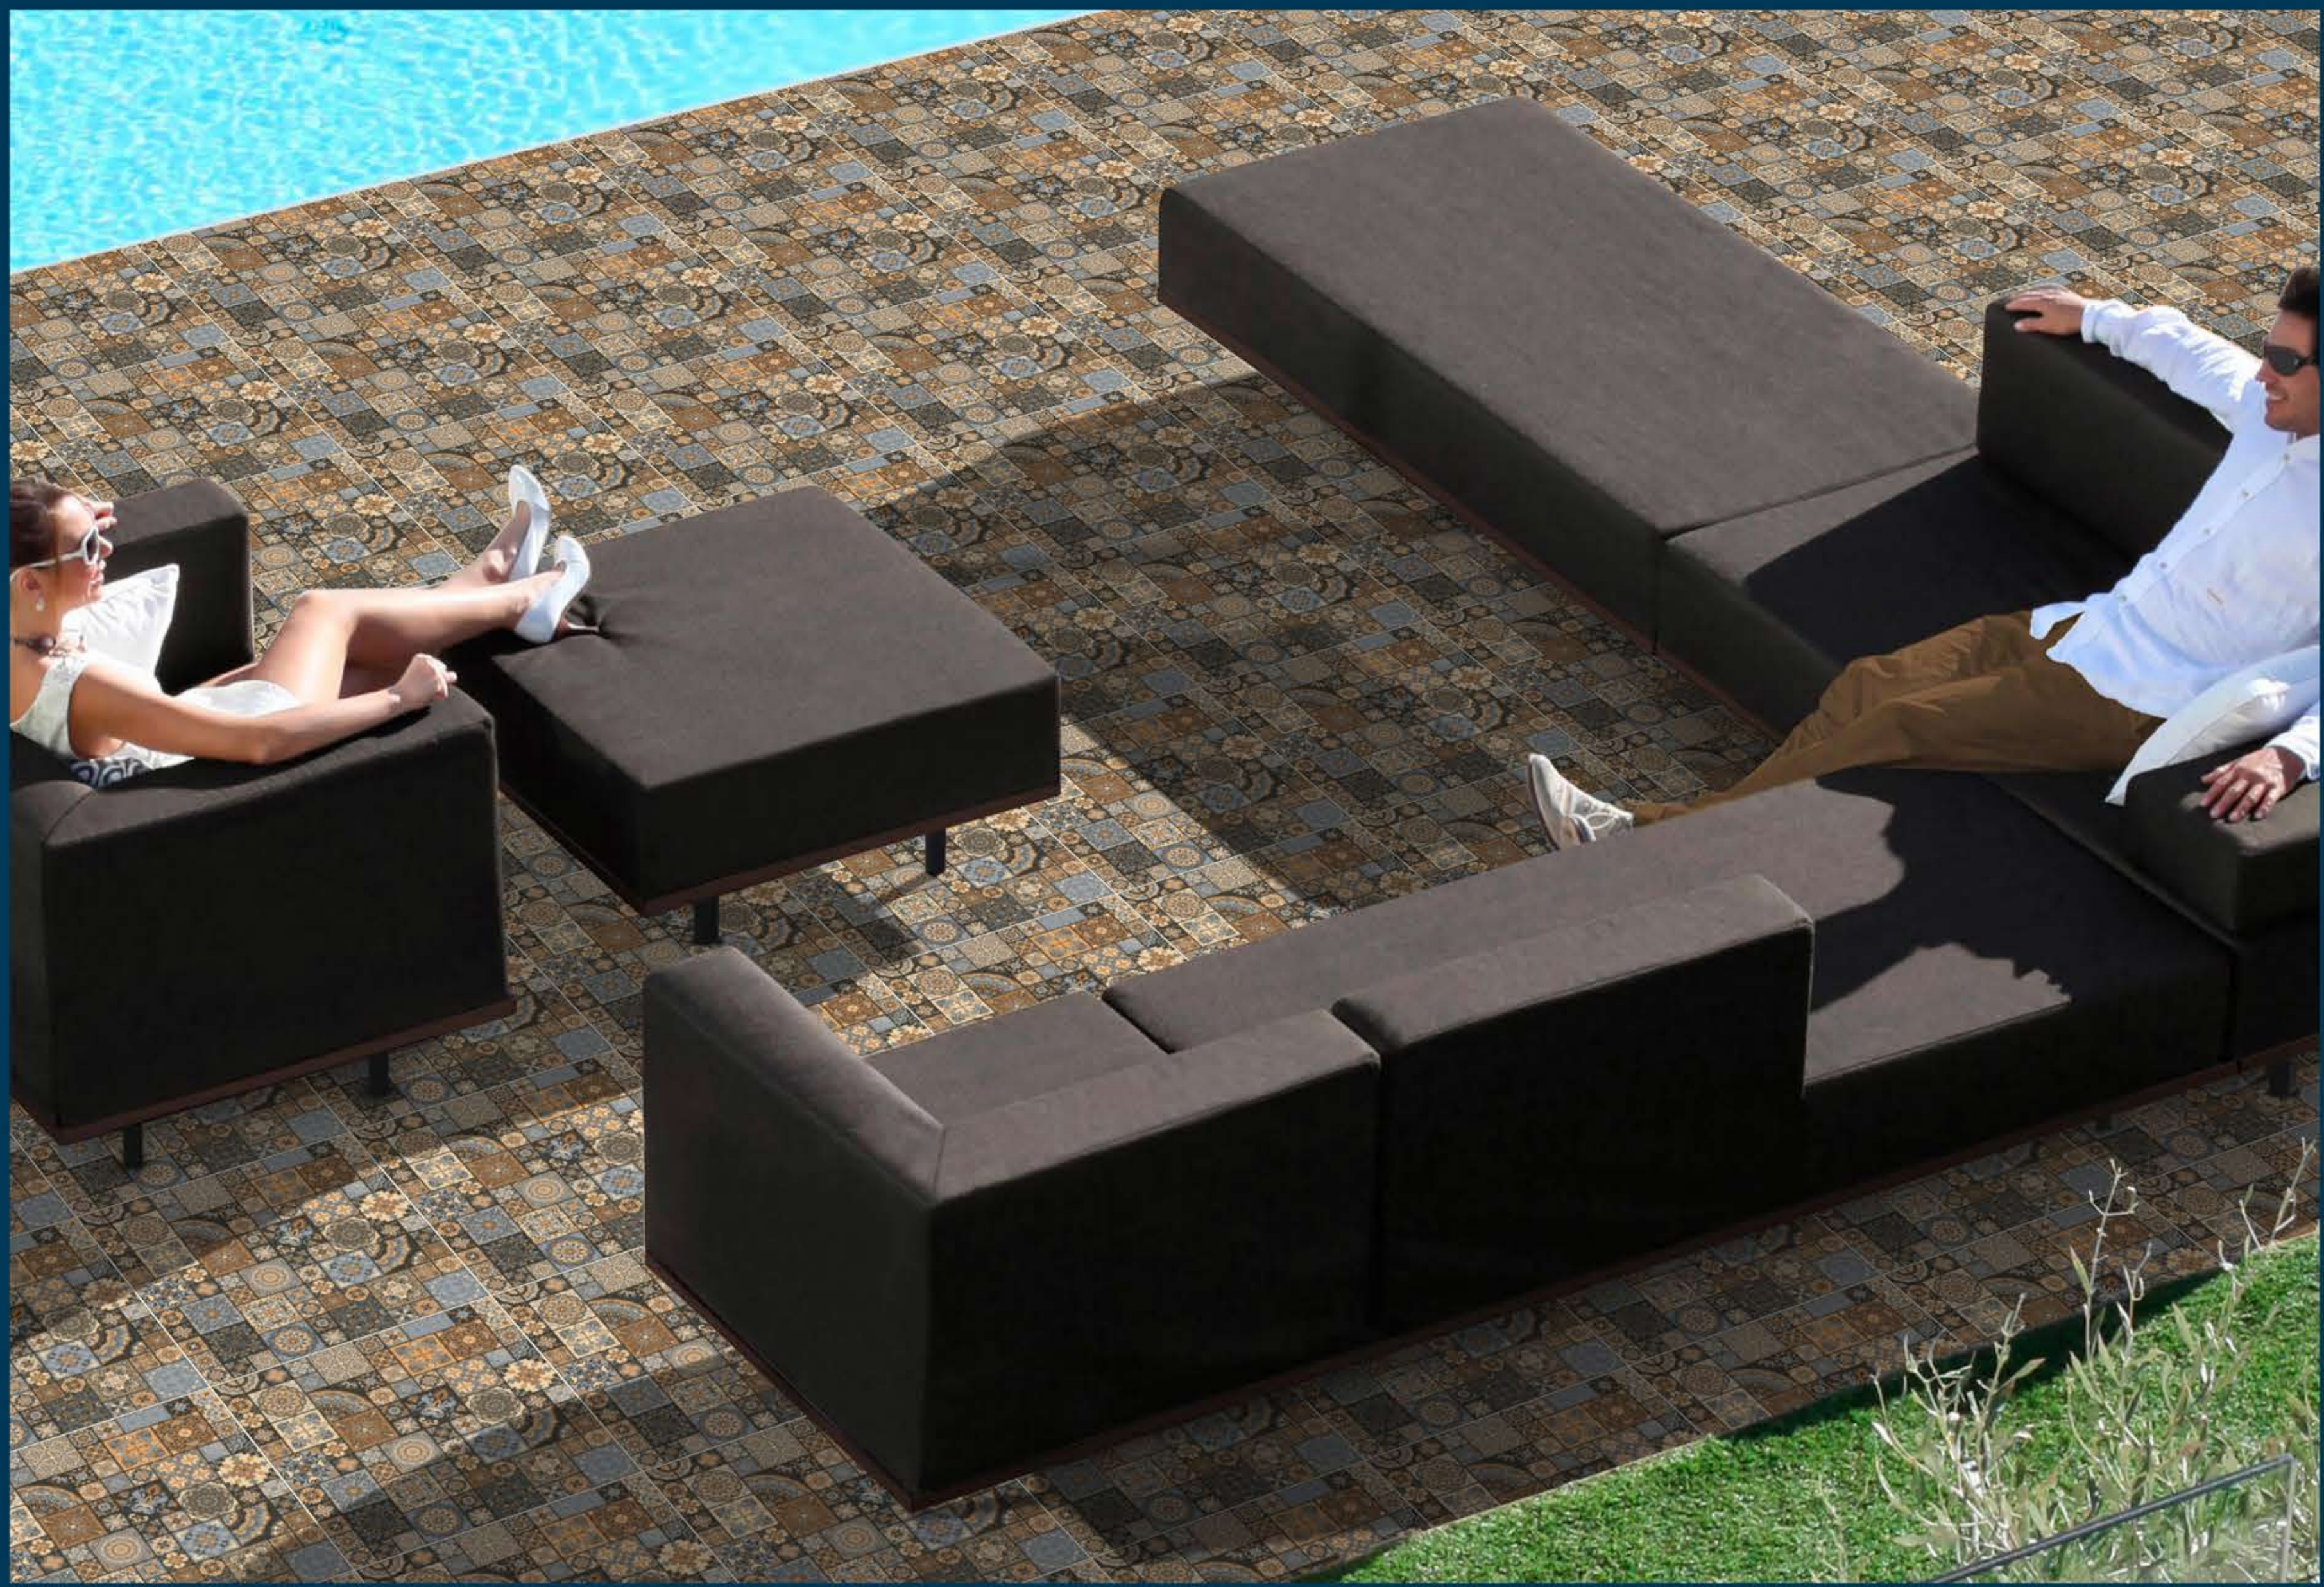


MOROCCAN SERIES



MATT
300x300mm
DIGITAL PARKING TILES

655

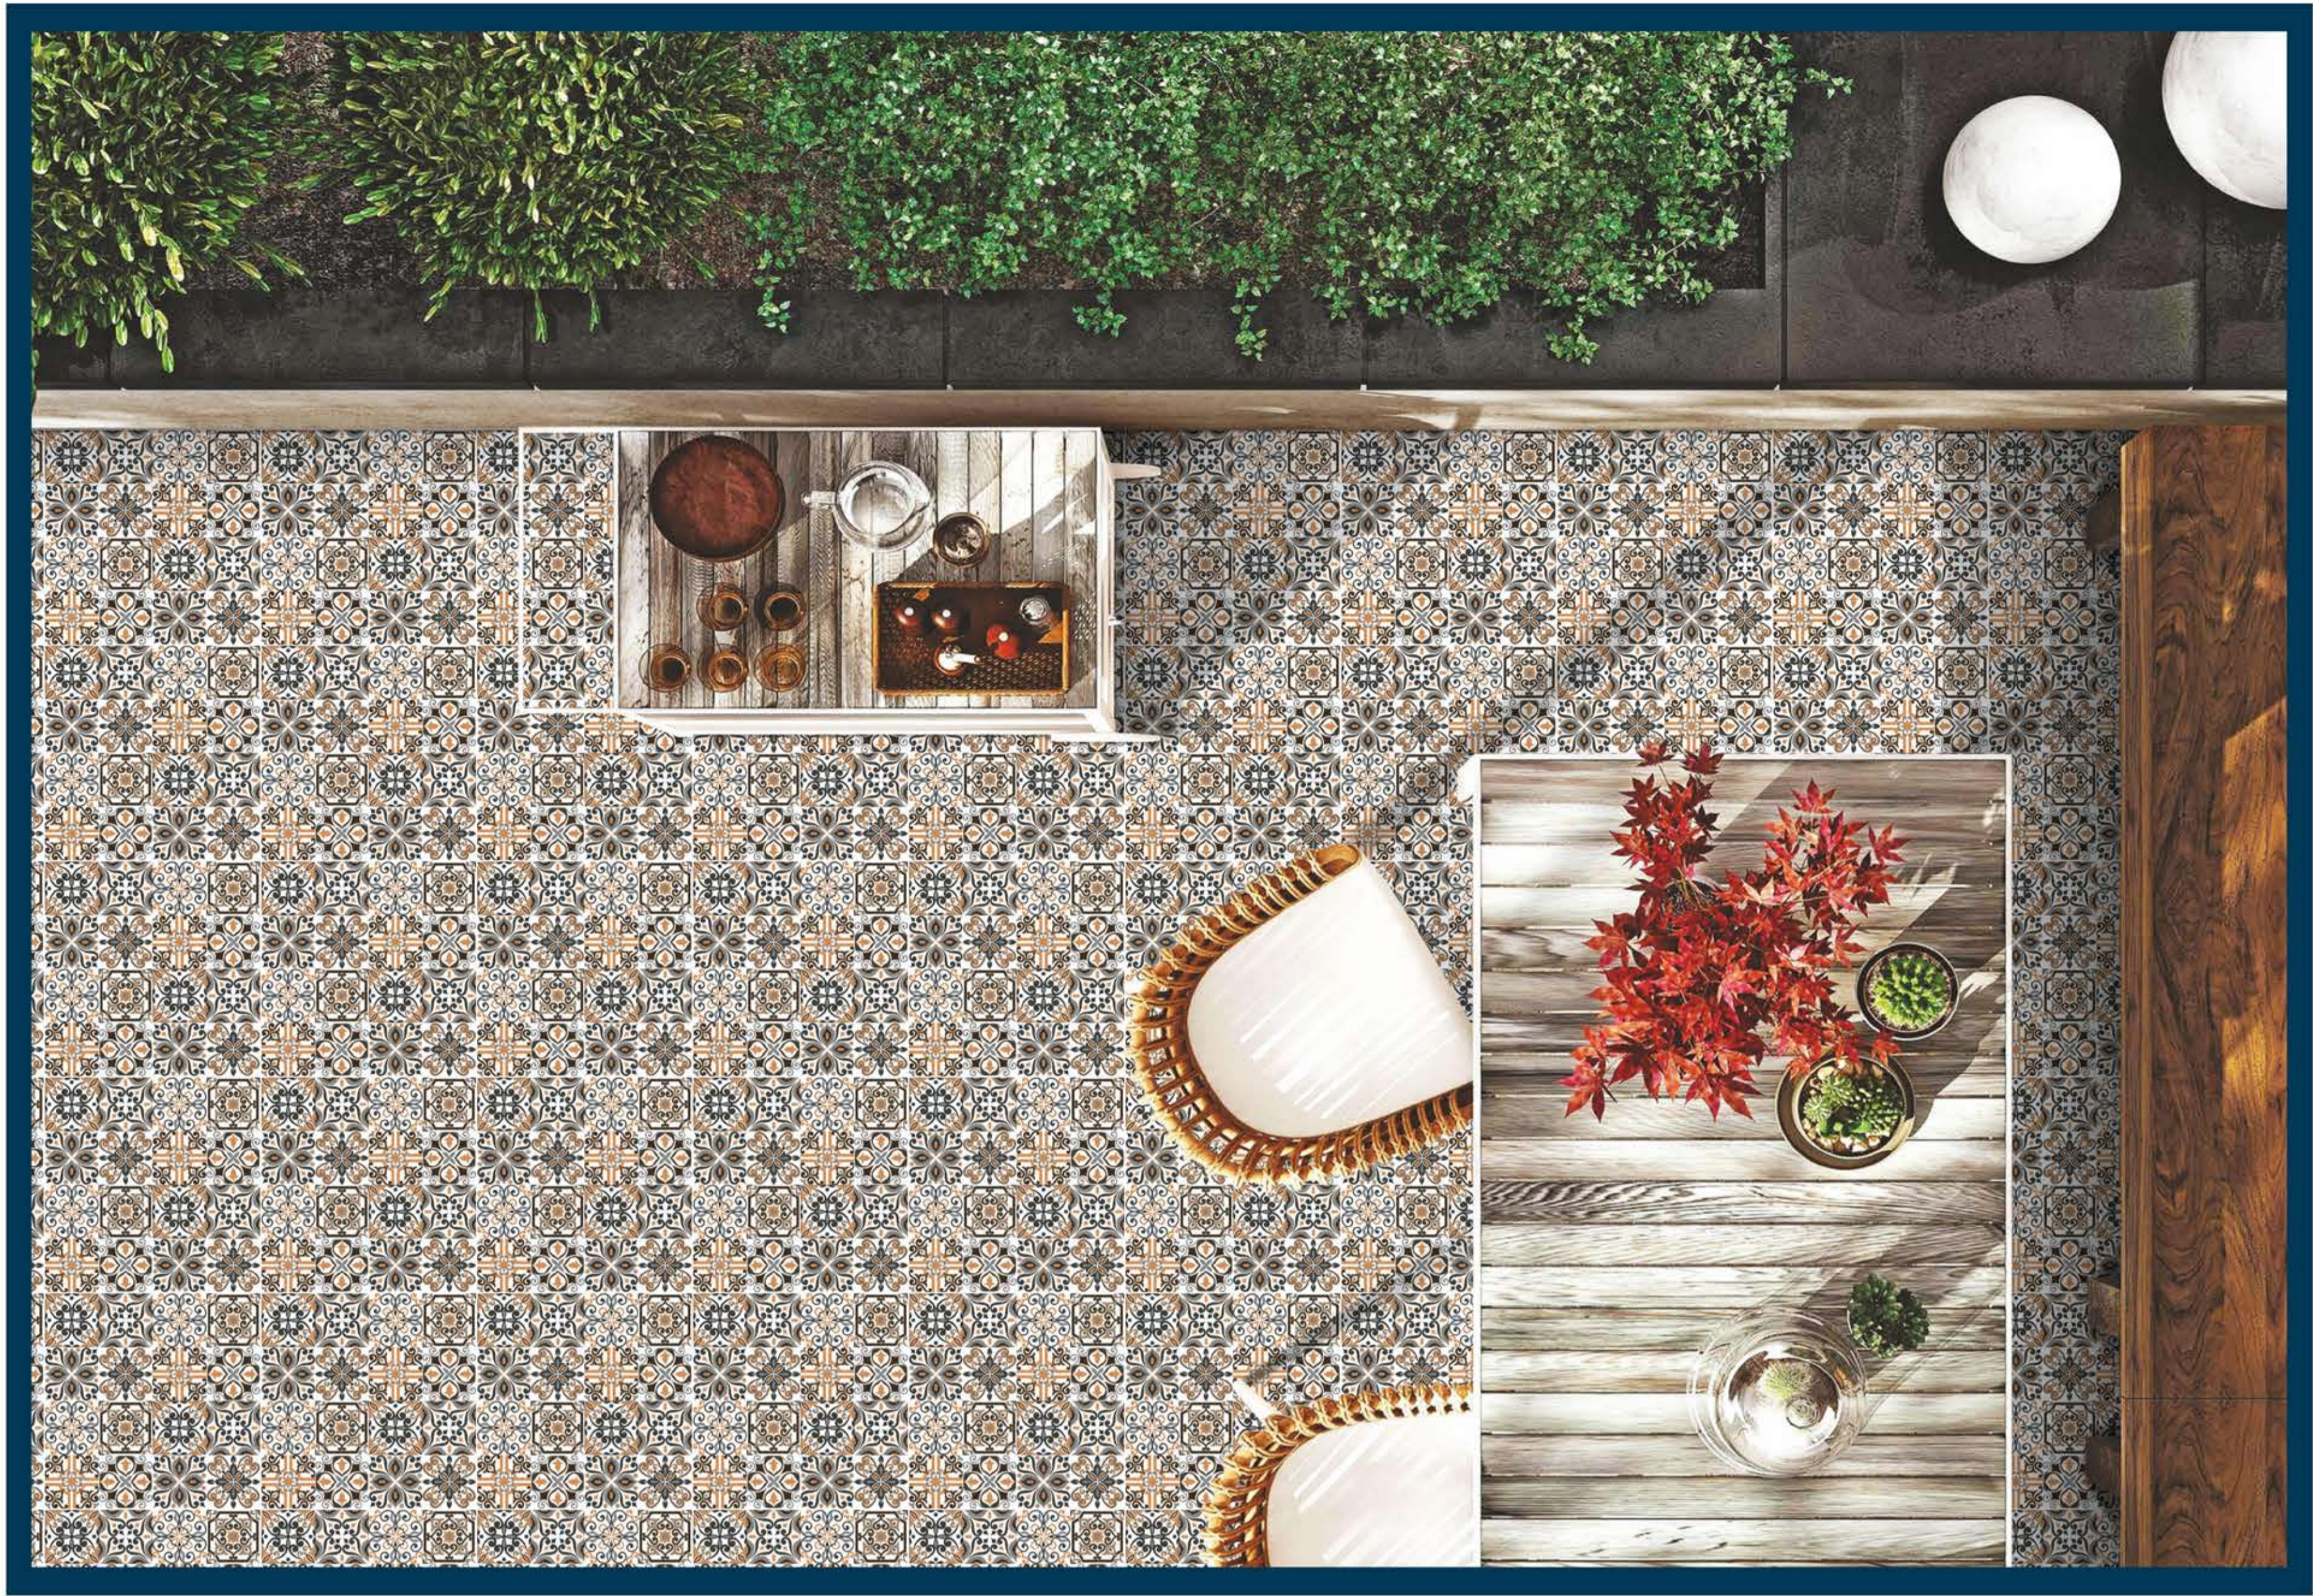

MOROCCAN SERIES



MATT
300x300mm
DIGITAL PARKING TILES

656



MOROCCAN SERIES



MATT
300x300mm
DIGITAL PARKING TILES

657




MOROCCAN SERIES



MATT
300x300mm
DIGITAL PARKING TILES

658

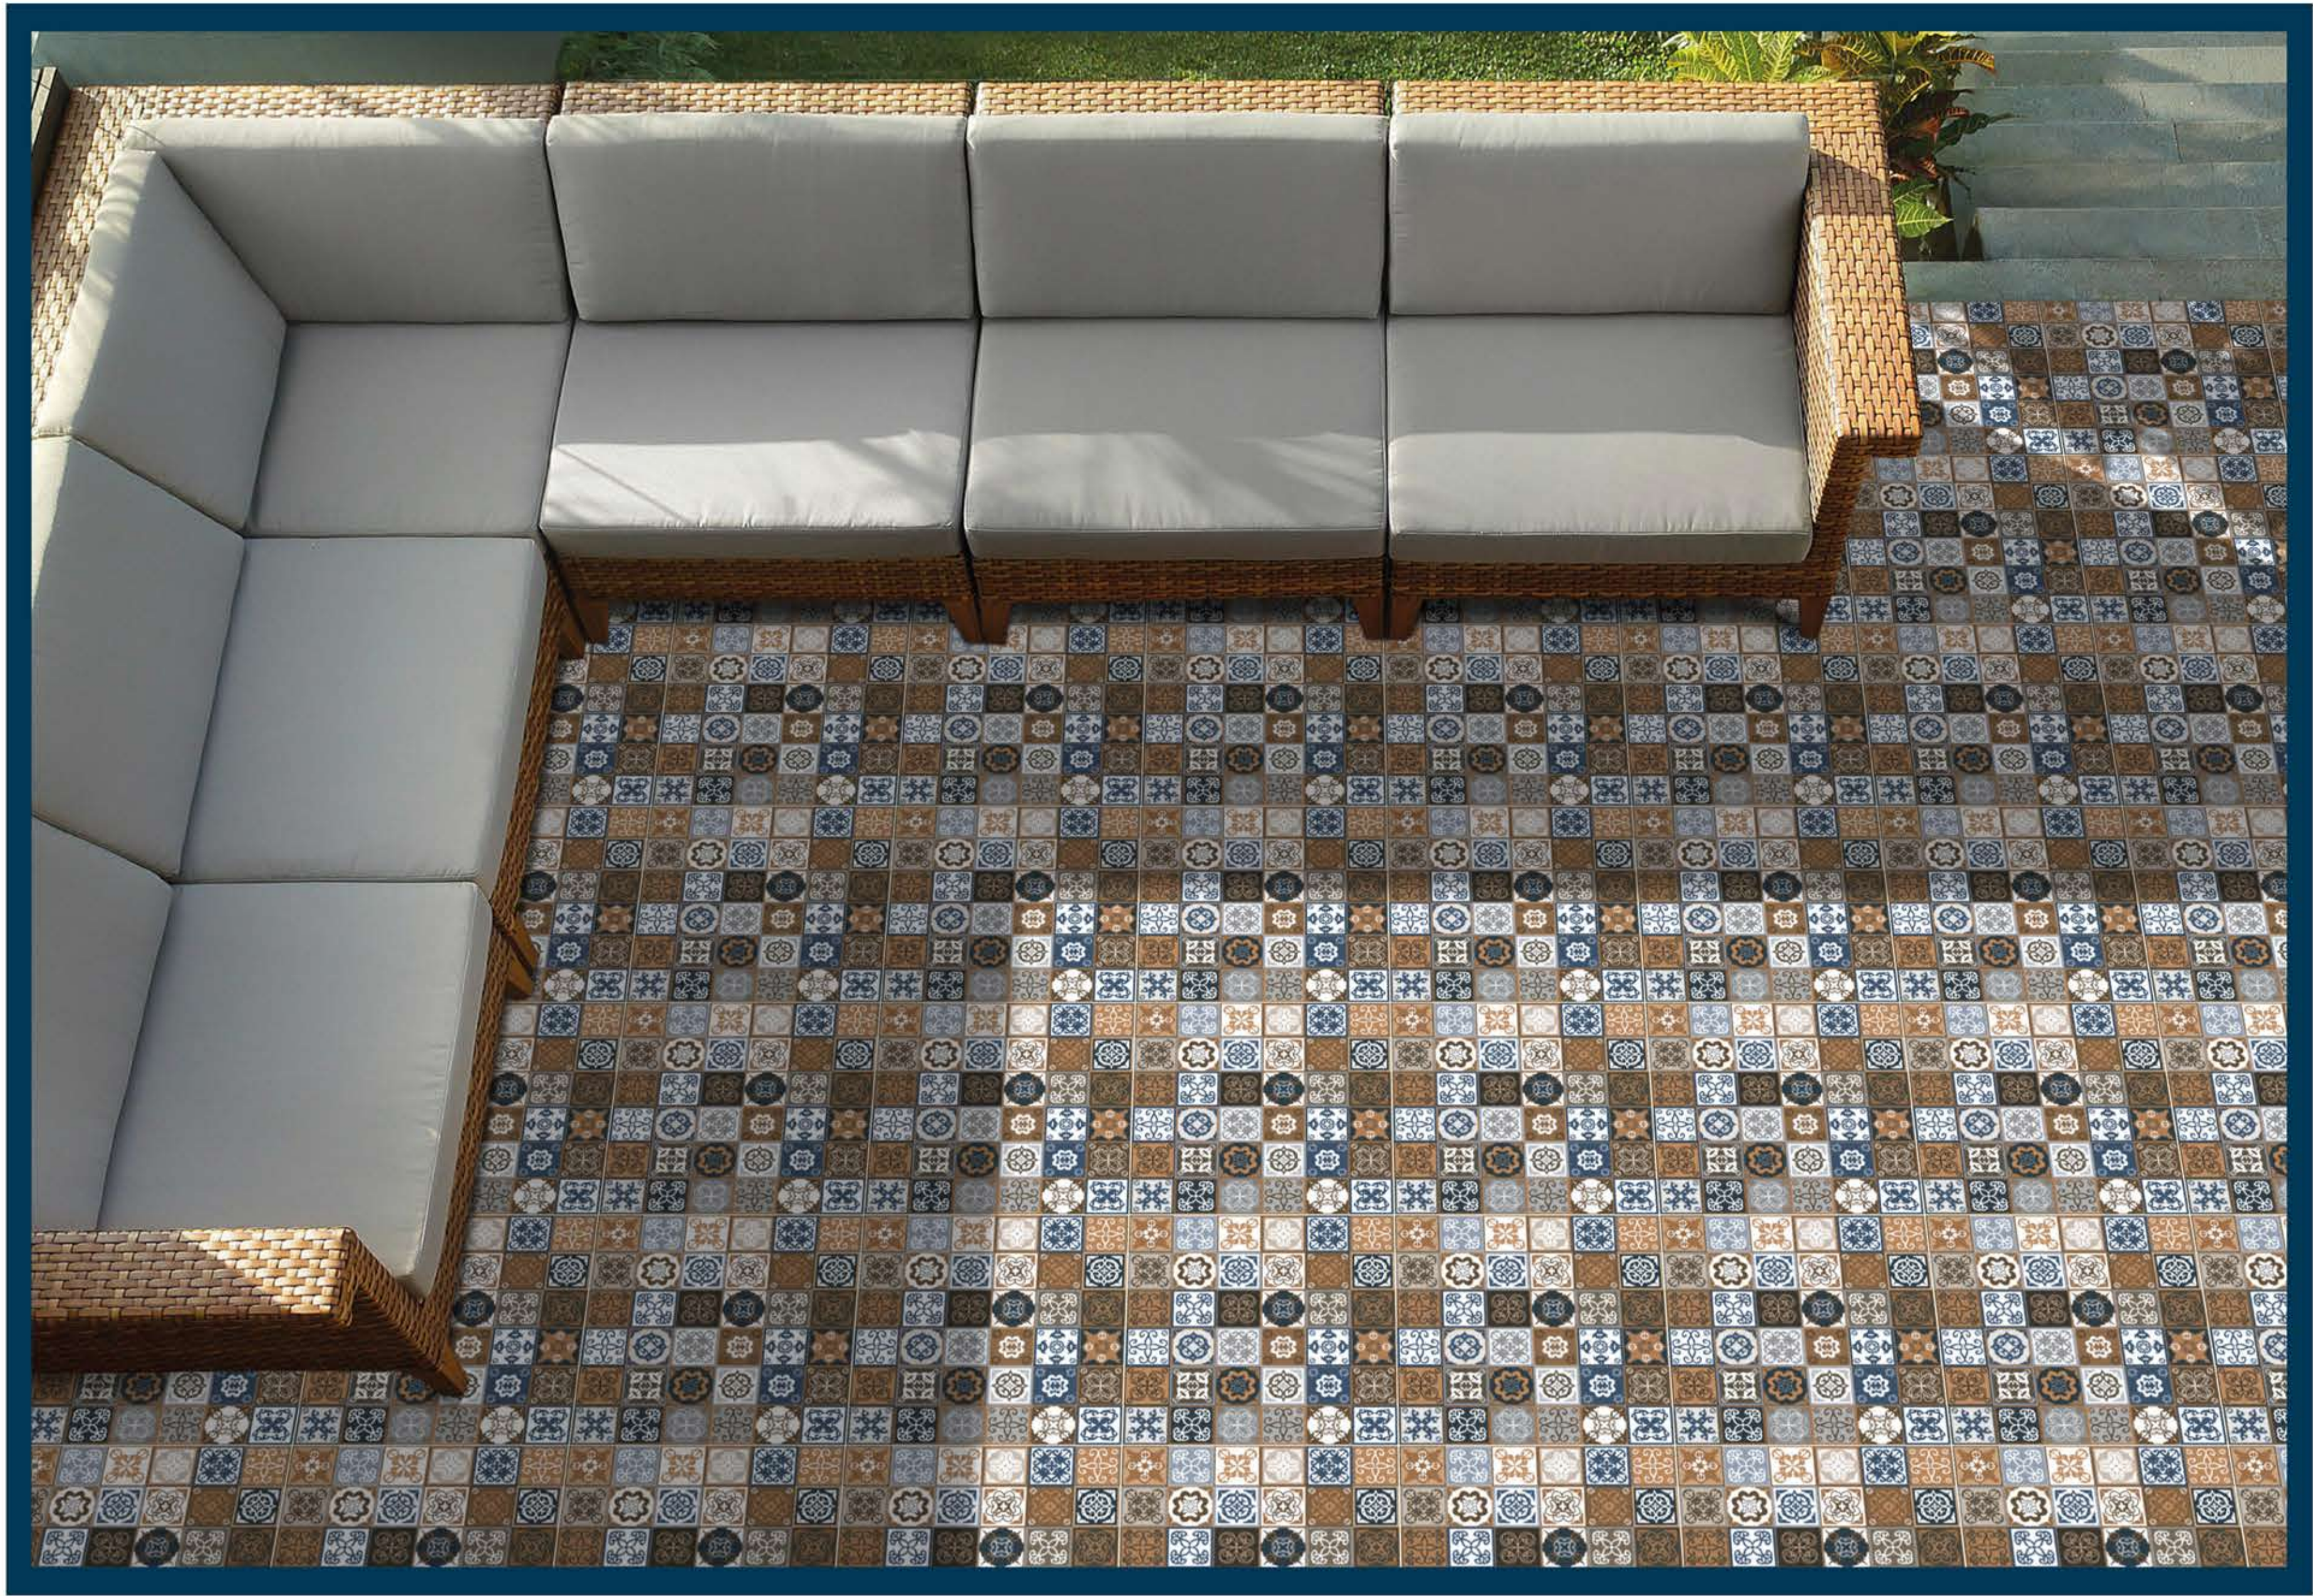

MOROCCAN SERIES



MATT
300x300mm
DIGITAL PARKING TILES

659



MOROCCAN SERIES



MATT
300x300mm
DIGITAL PARKING TILES

660




MOROCCAN SERIES



MATT
300x300mm
DIGITAL PARKING TILES

661

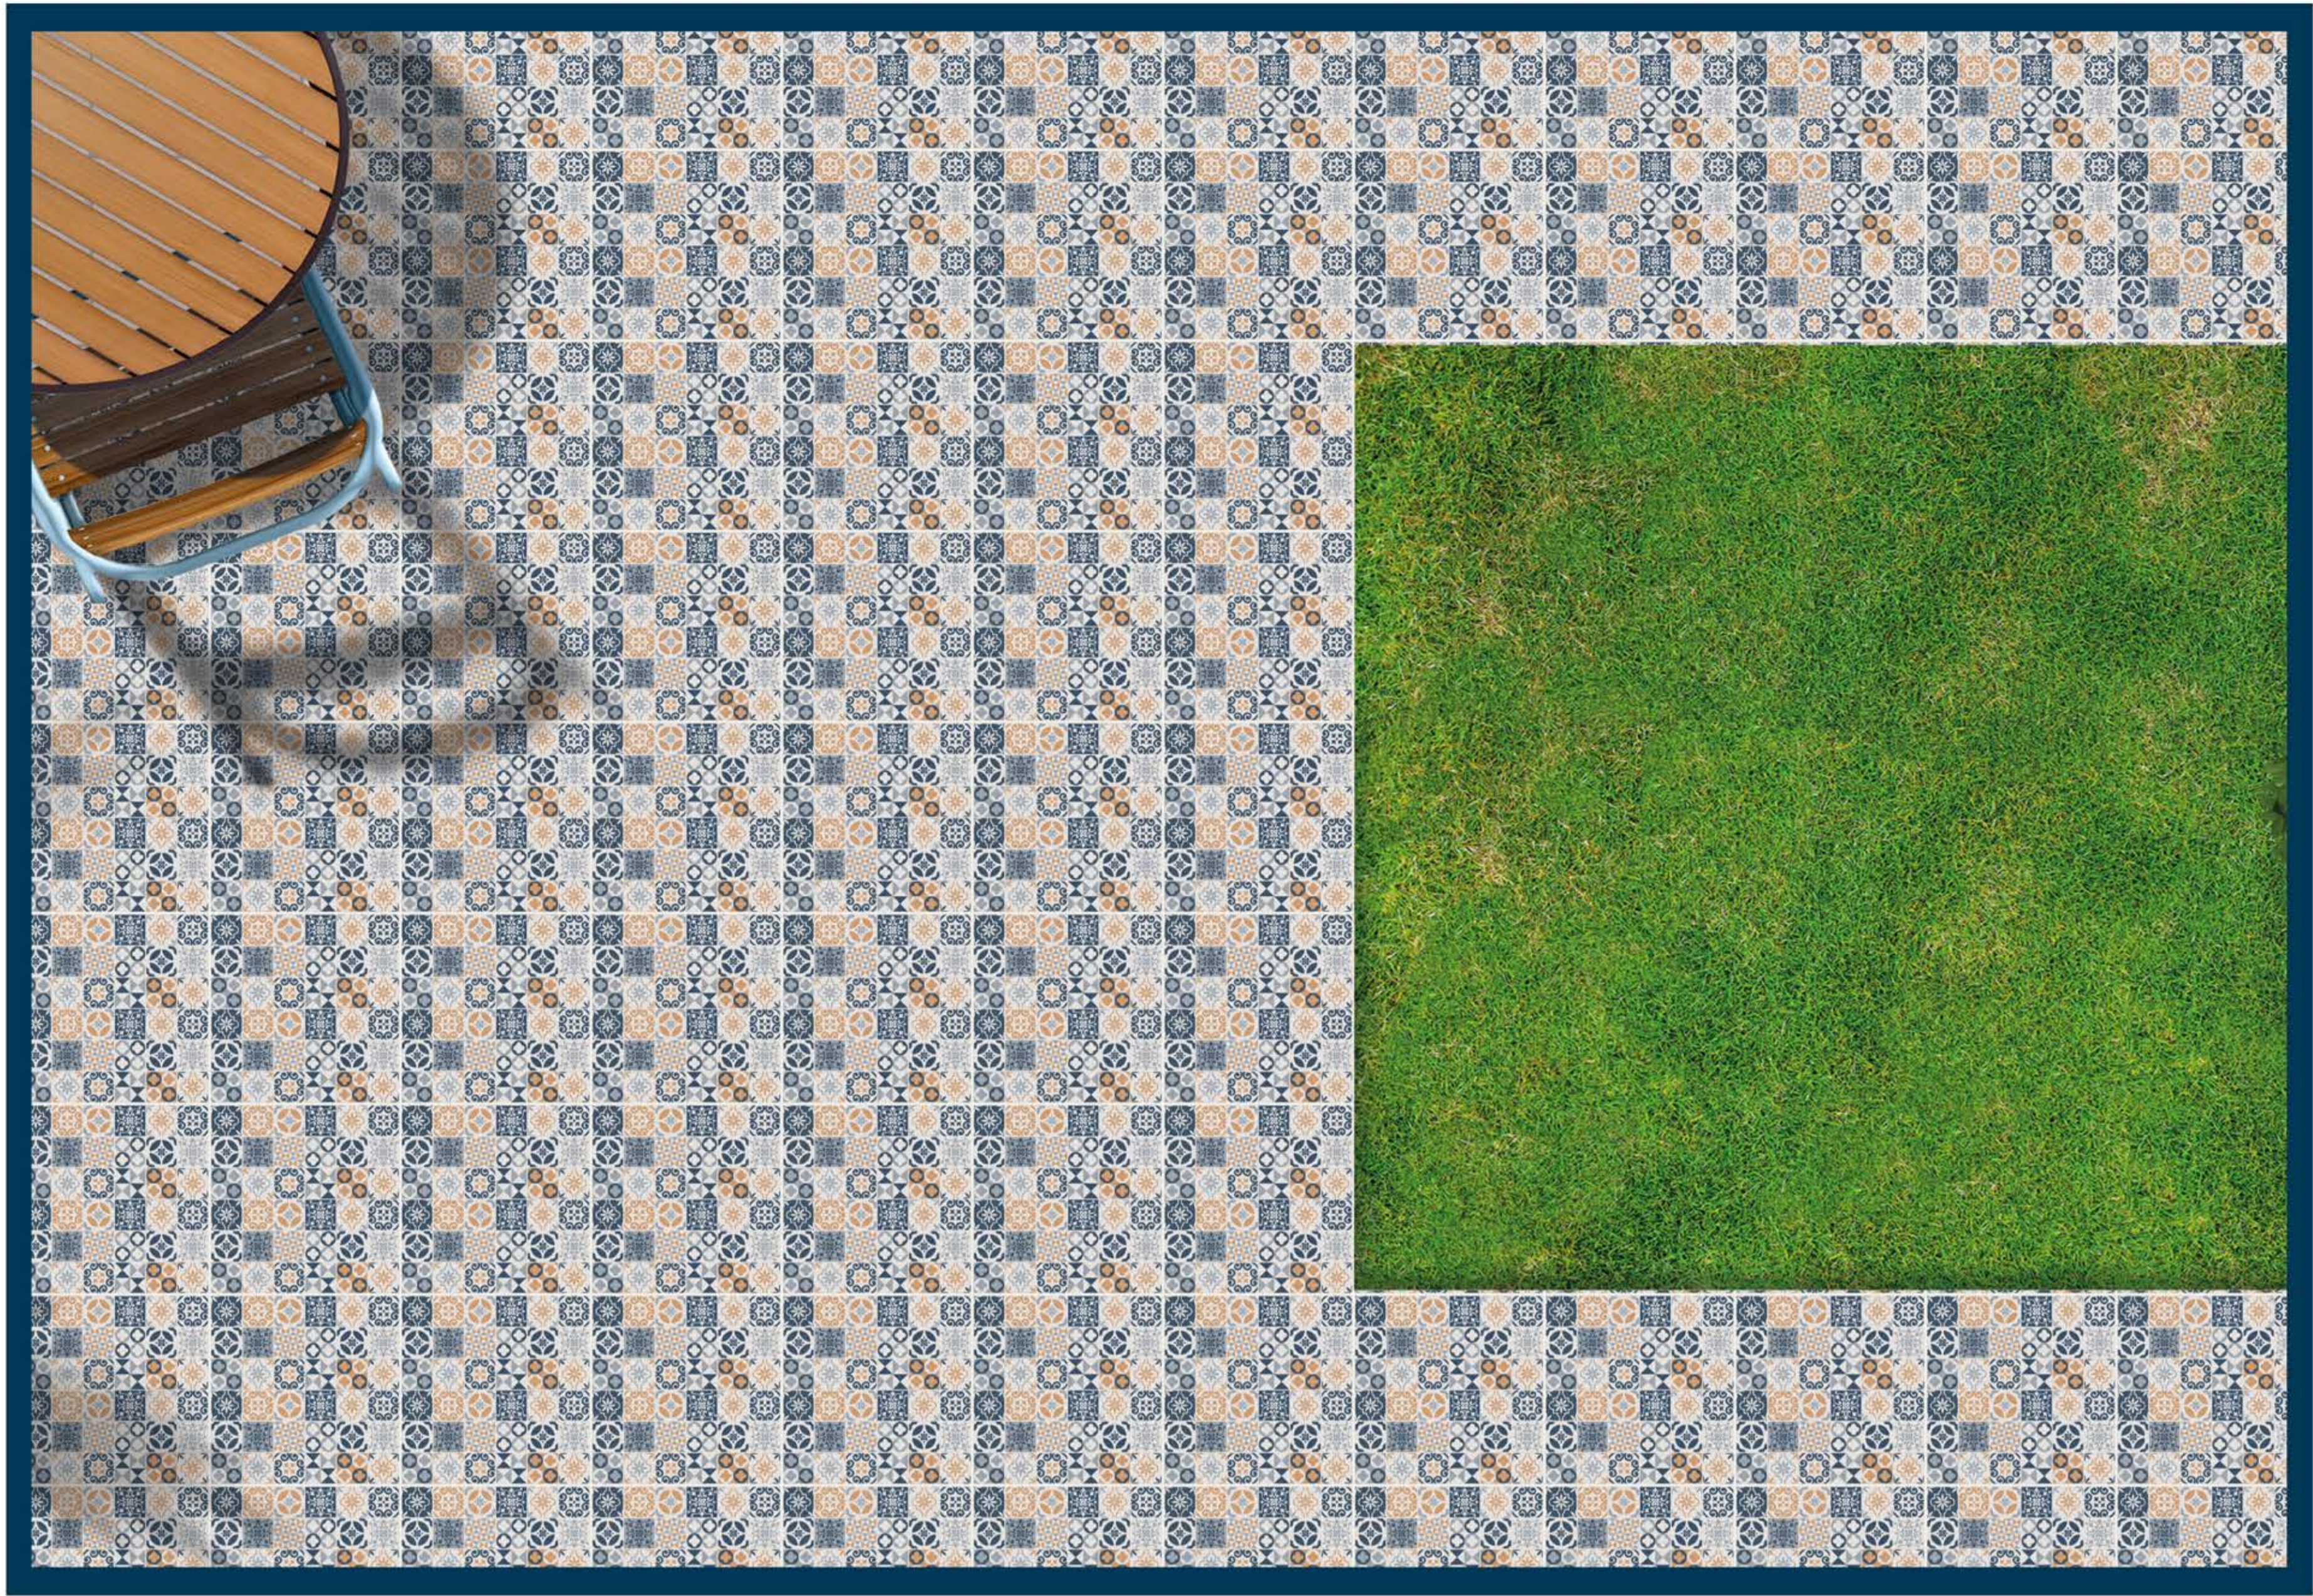

MOROCCAN SERIES



MATT
300x300mm
DIGITAL PARKING TILES

662




MOROCCAN SERIES




MATT
300x300mm
DIGITAL PARKING TILES

663

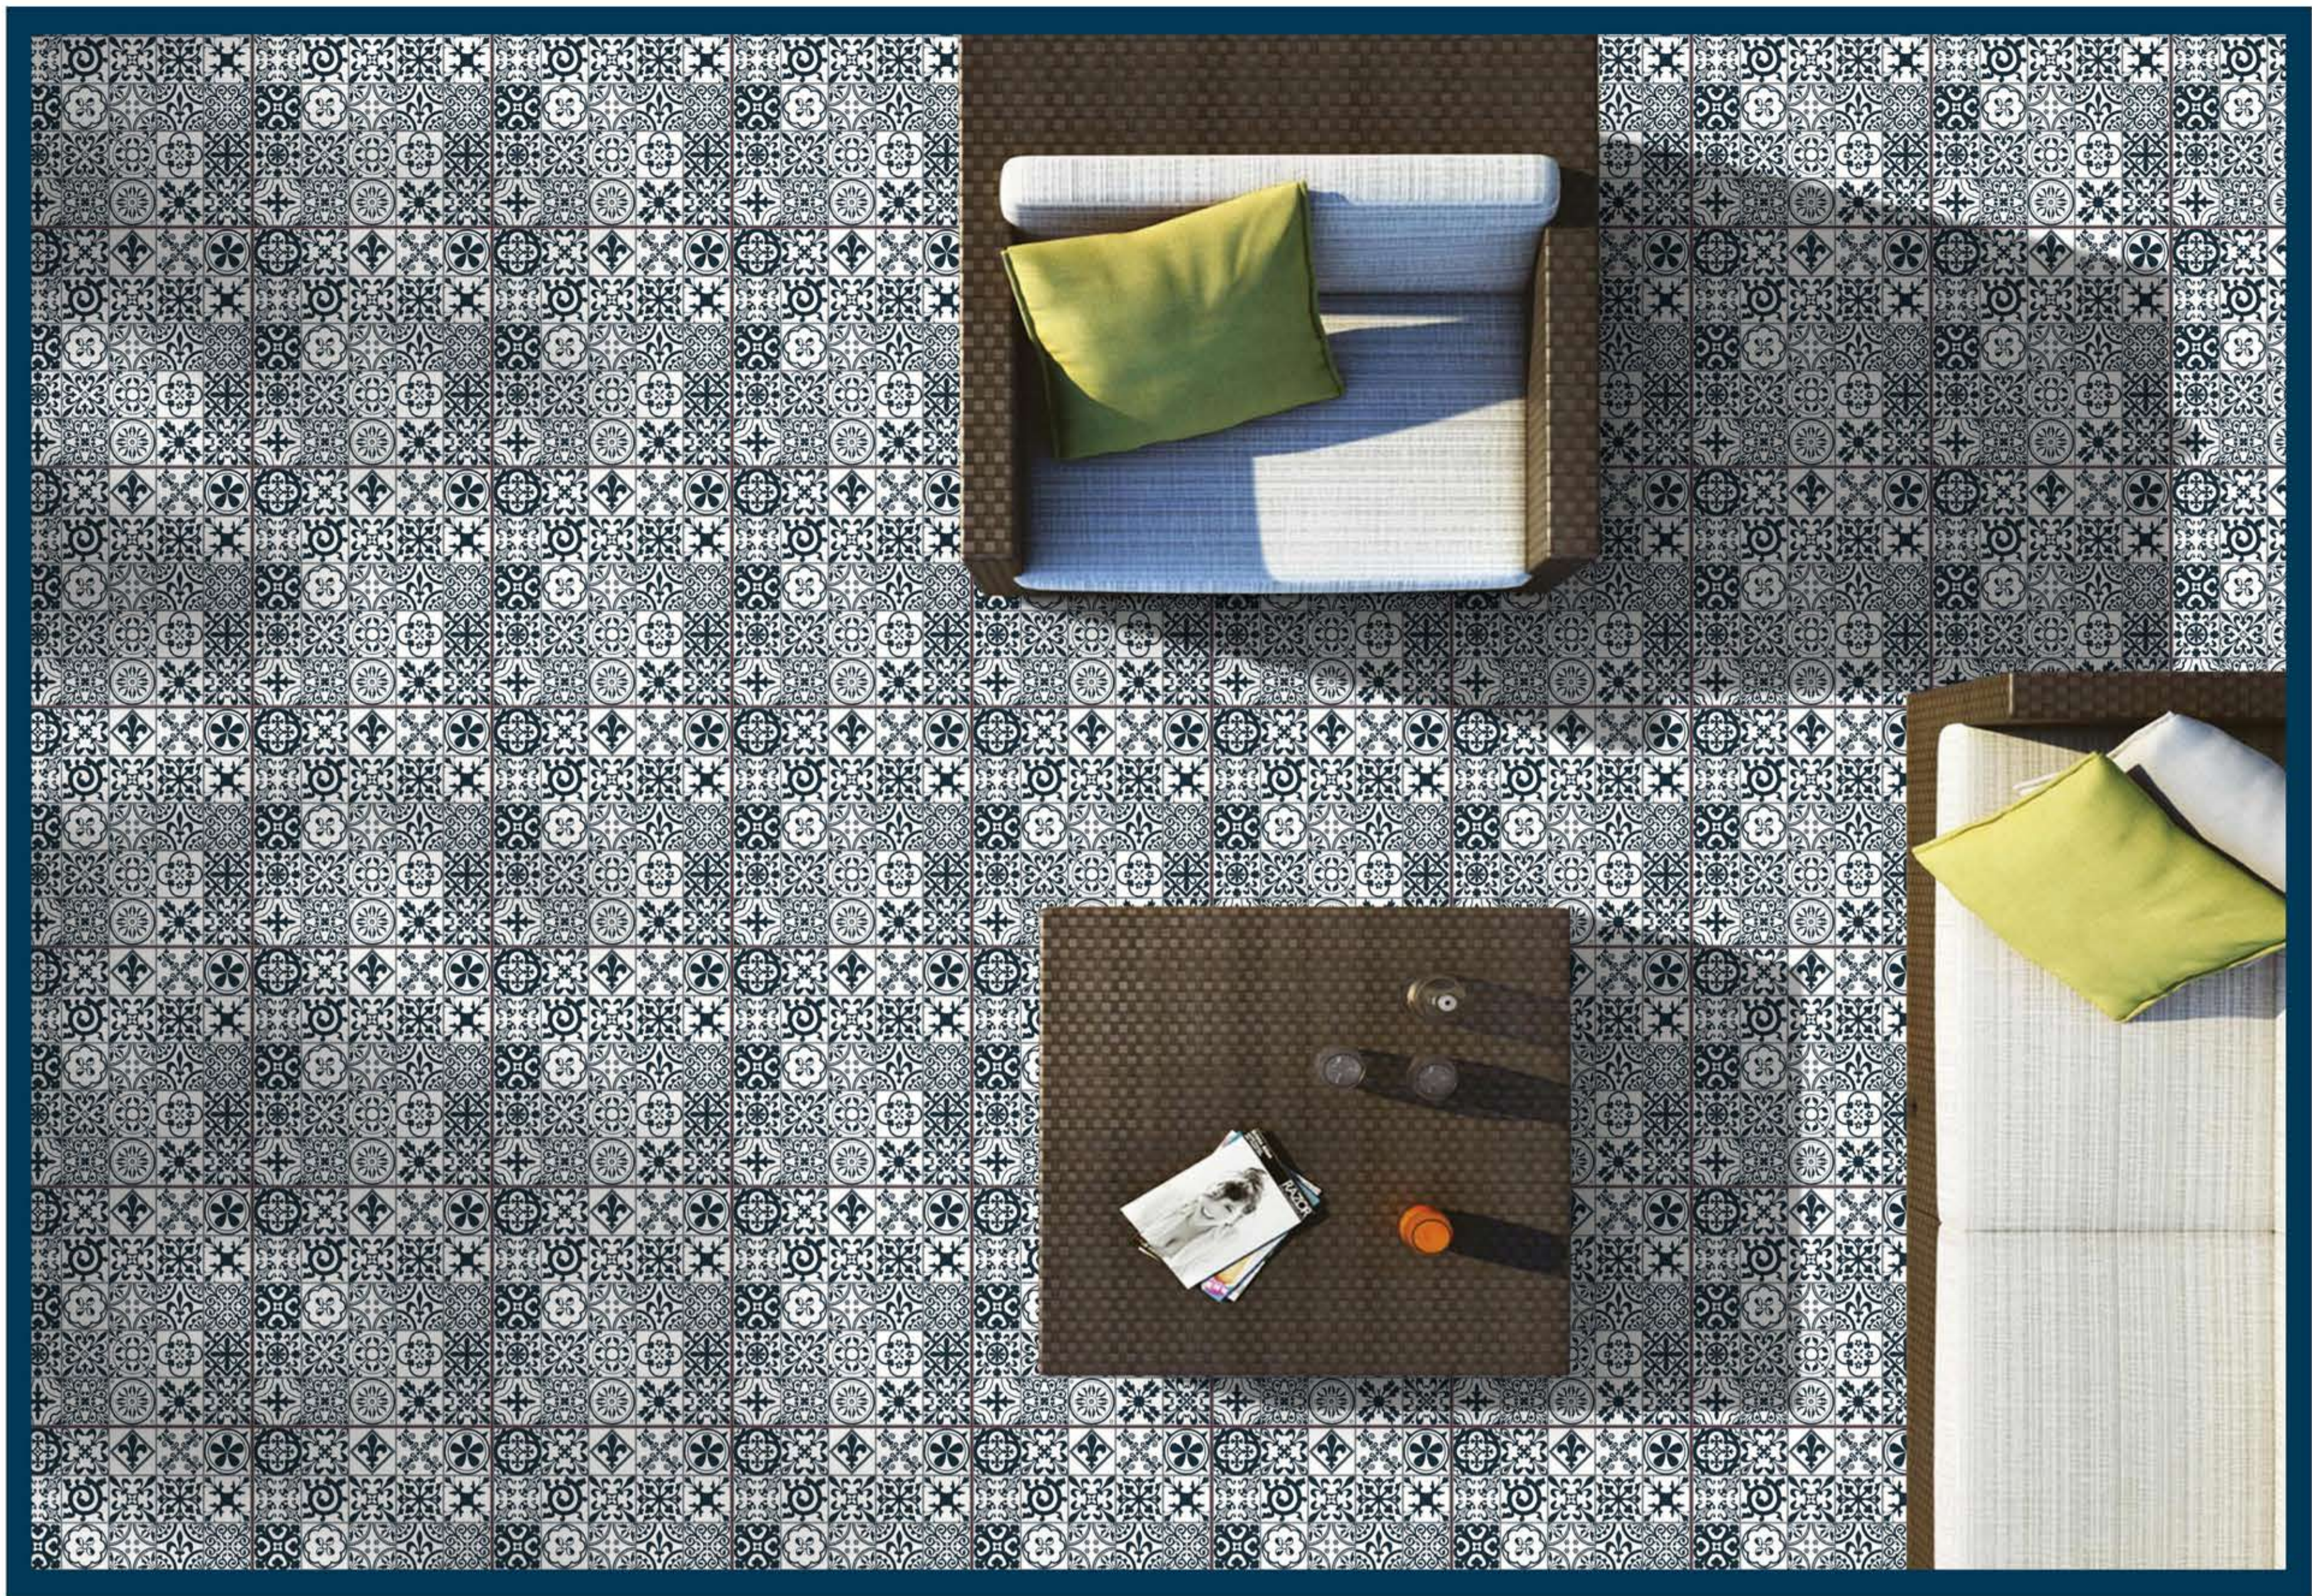

MOROCCAN SERIES

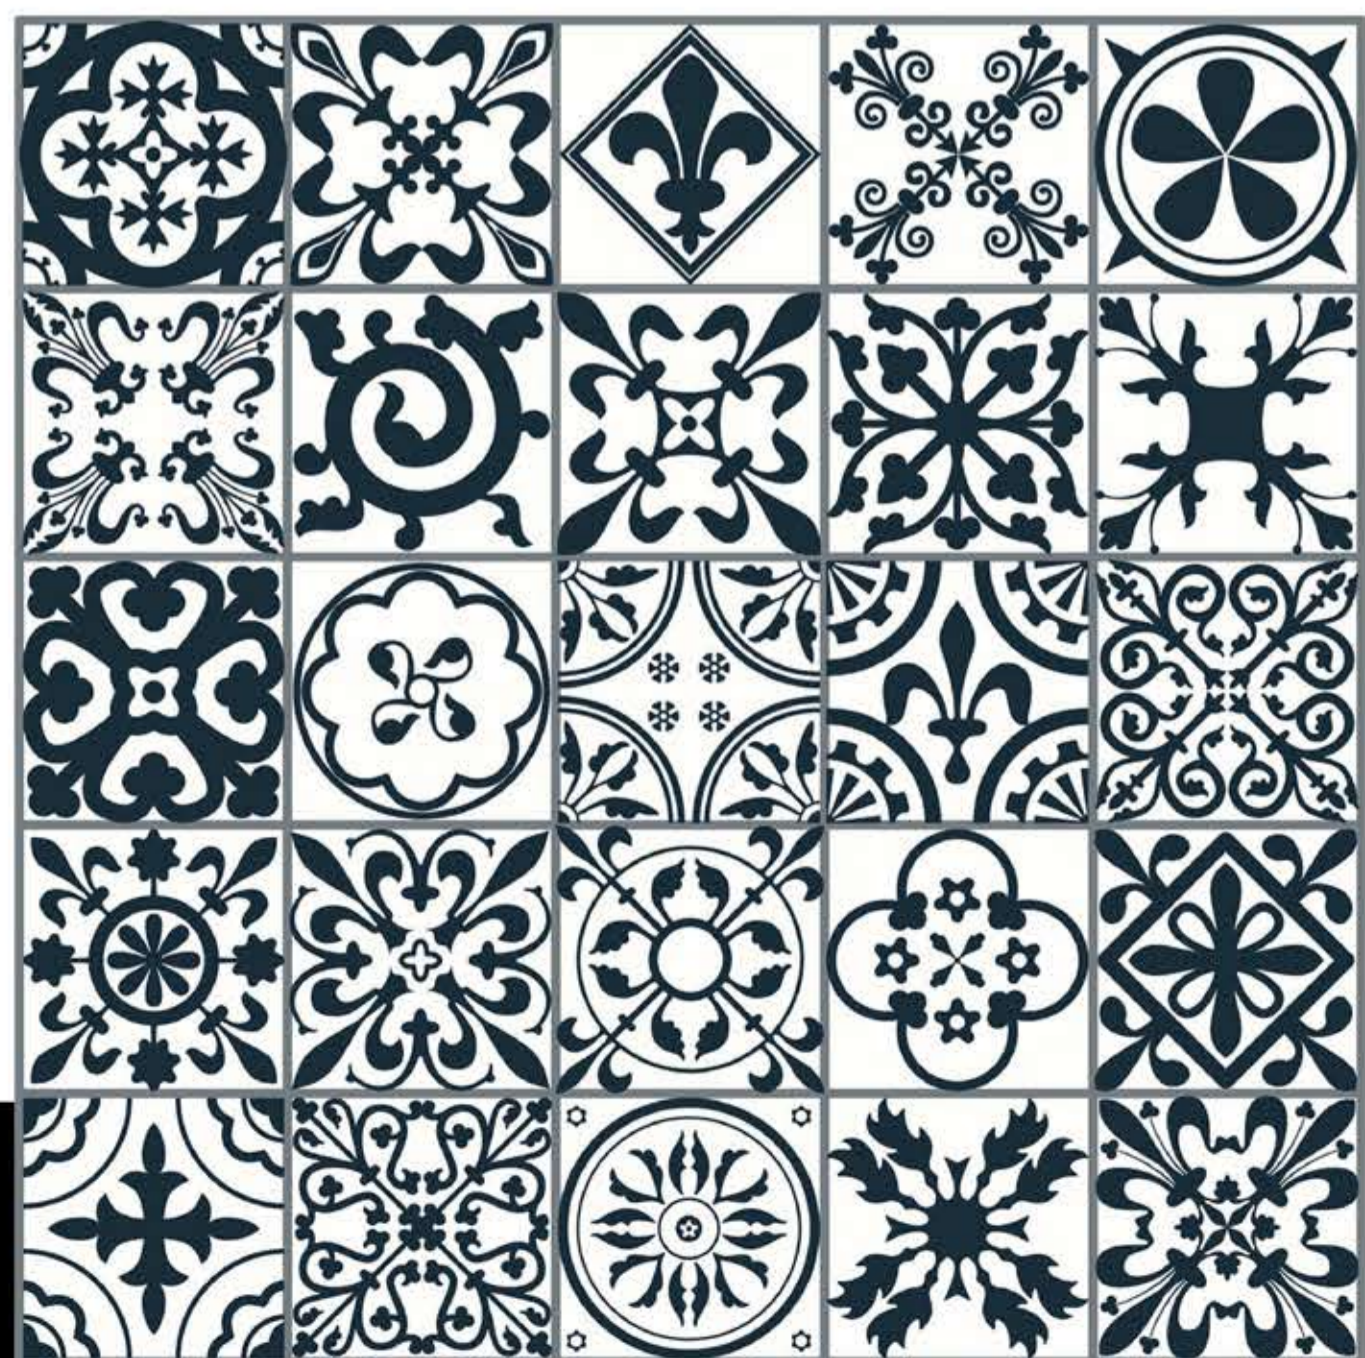


MATT
300x300mm
DIGITAL PARKING TILES

664




MOROCCAN SERIES

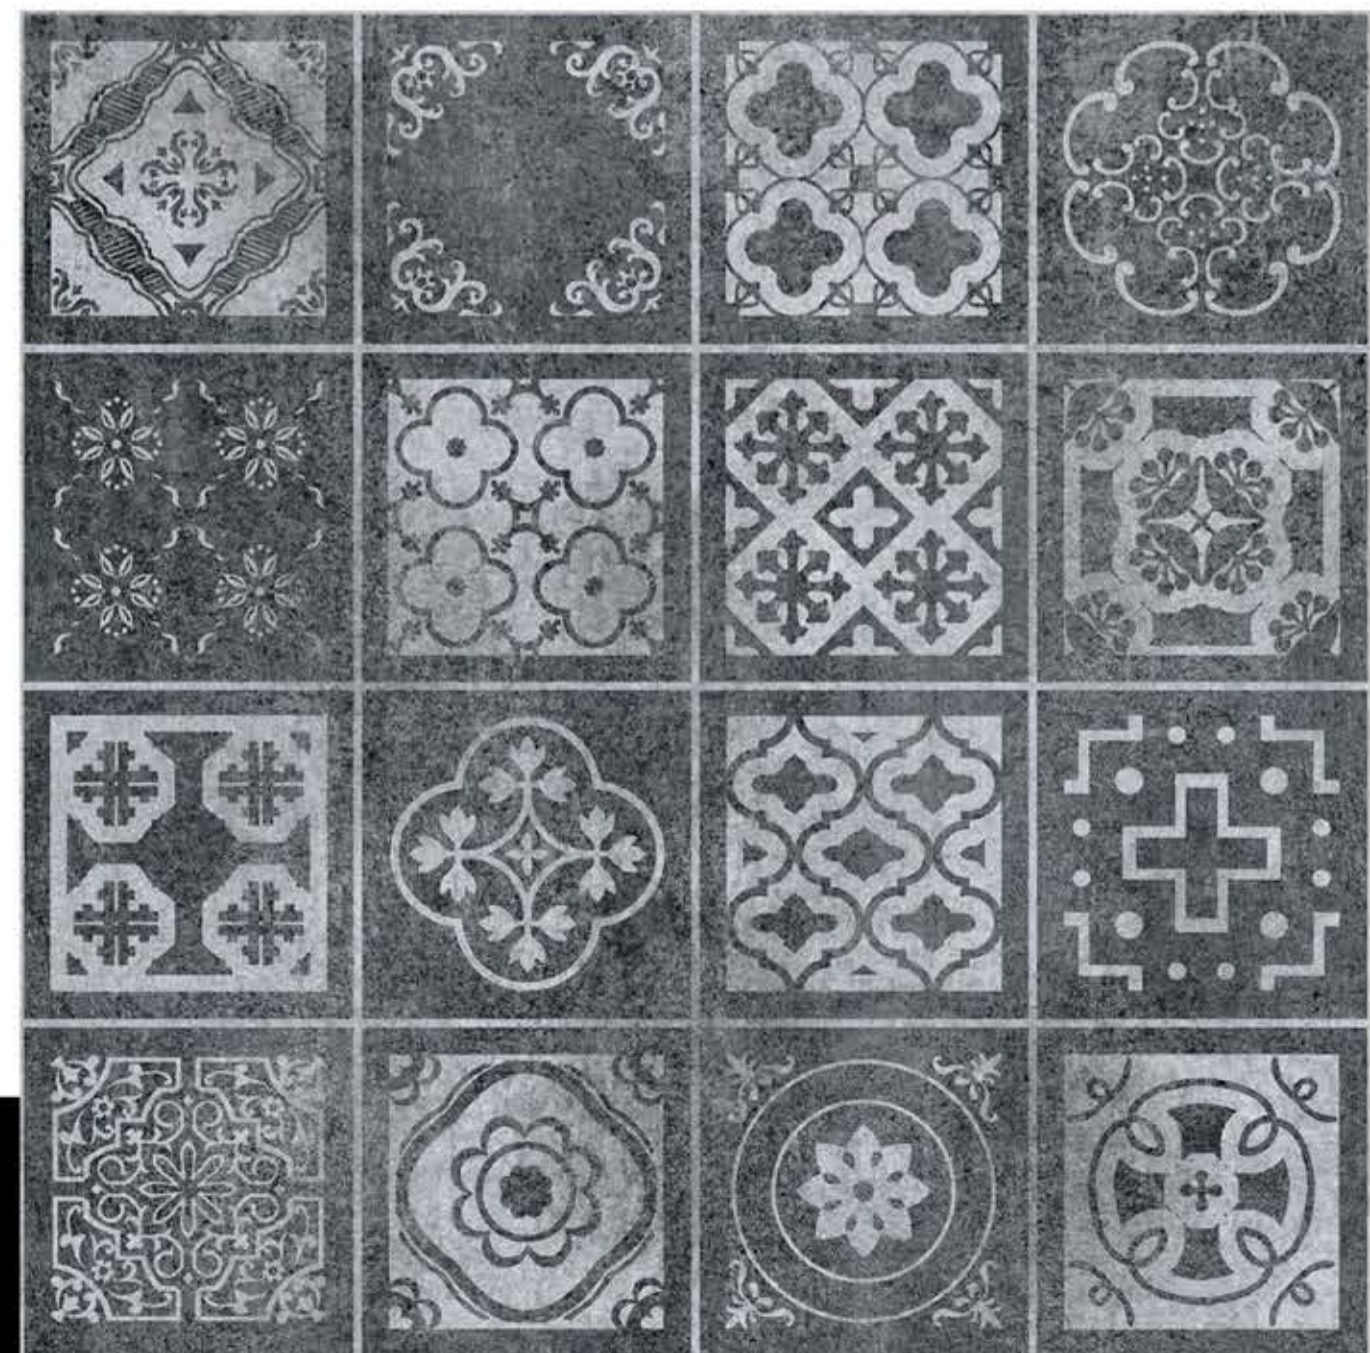


MATT
300x300mm
DIGITAL PARKING TILES

665

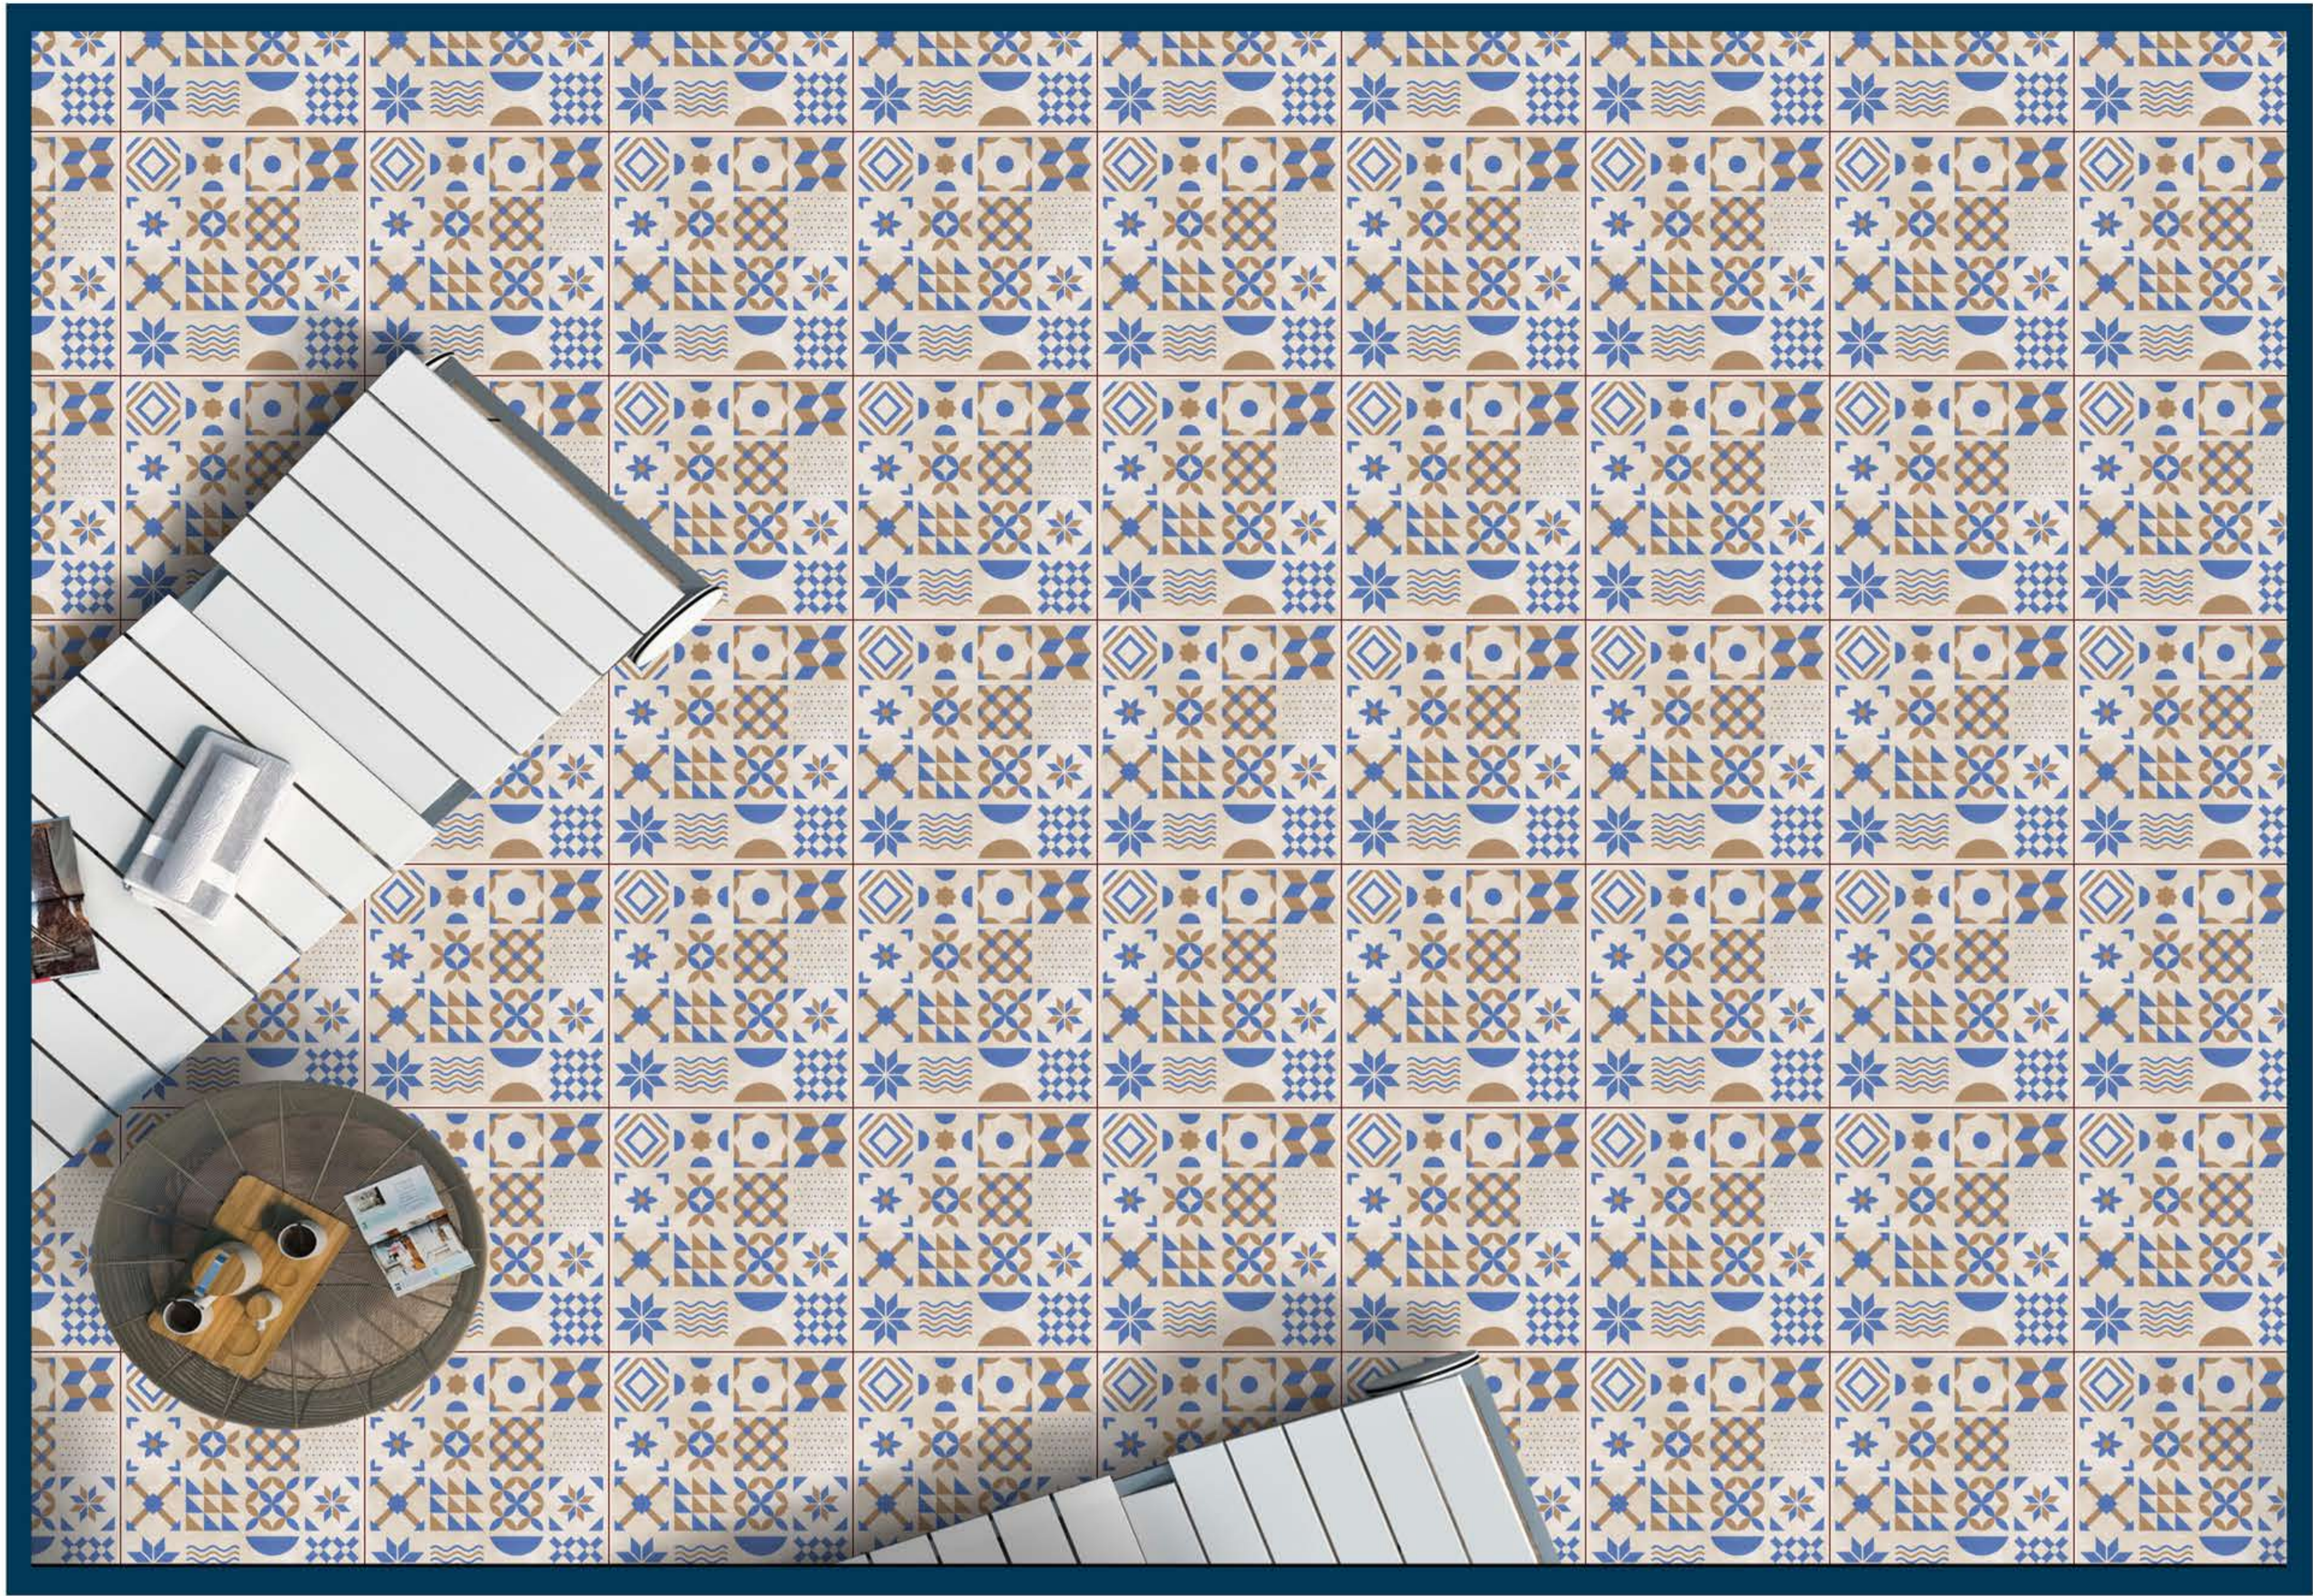

MATT
300x300mm
DIGITAL PARKING TILES

666

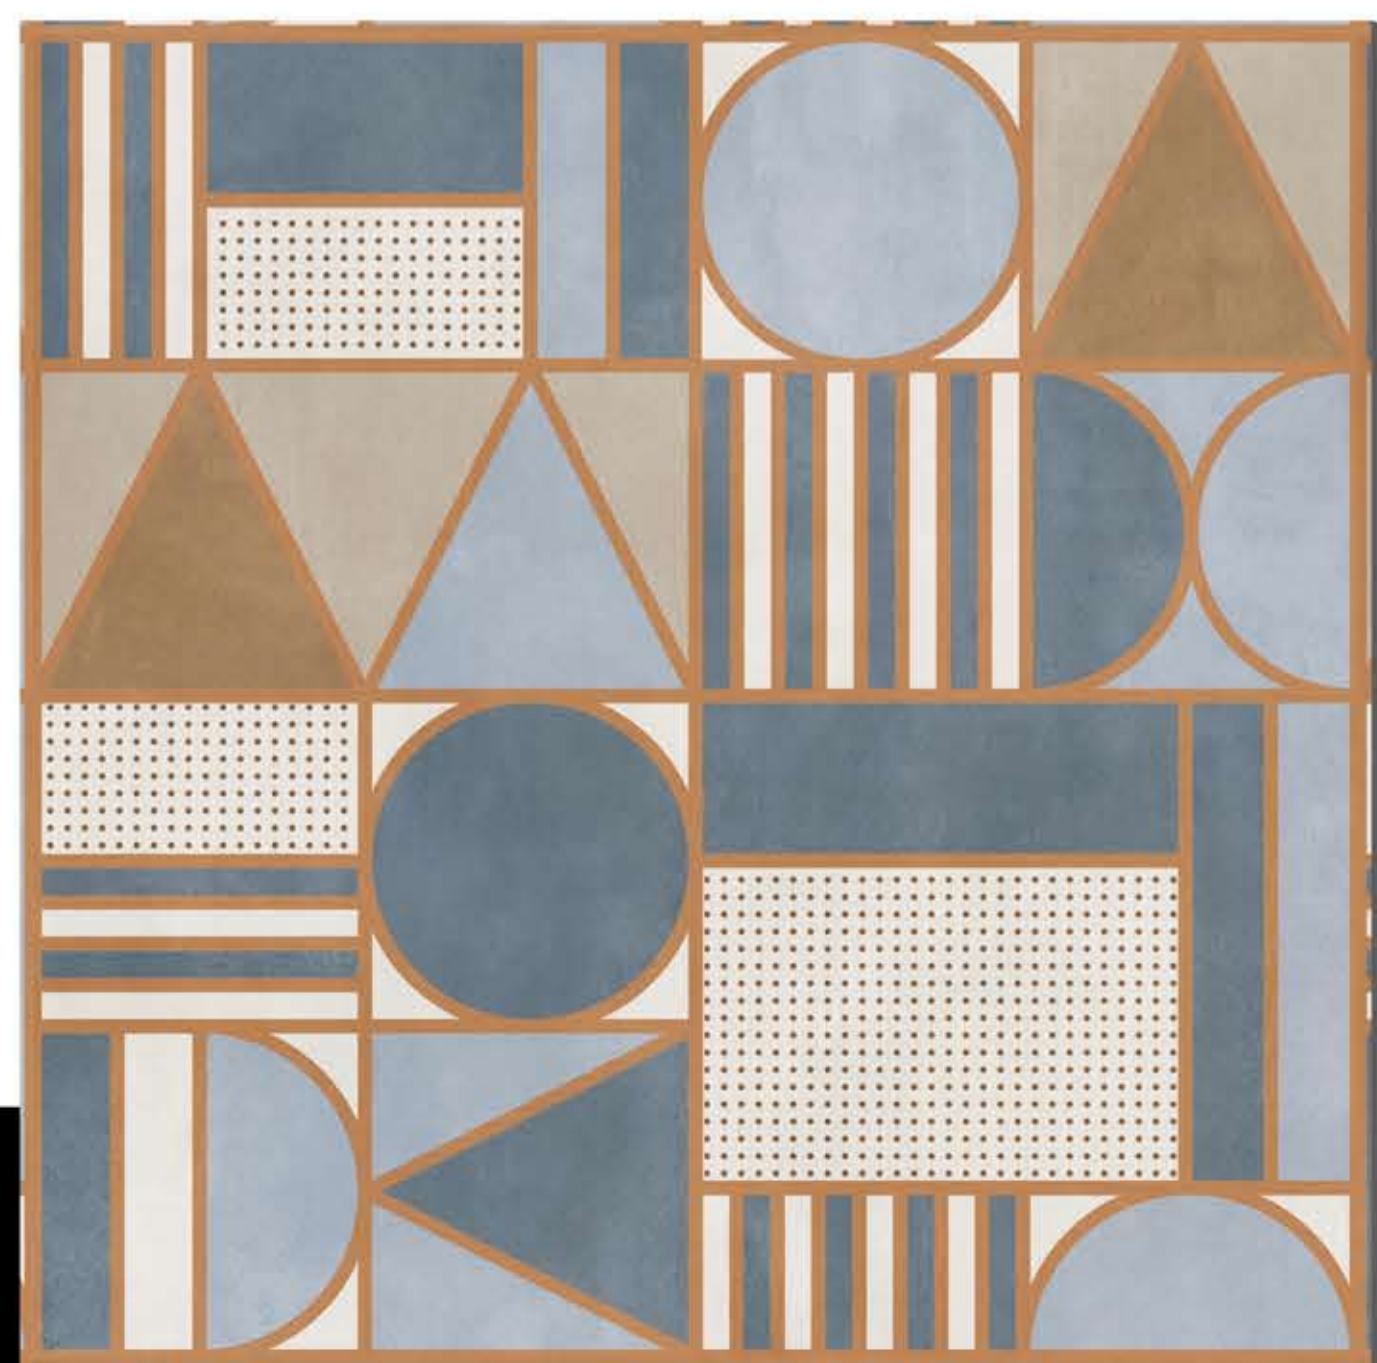

MATT
300x300mm
DIGITAL PARKING TILES

667



MATT
300x300mm
DIGITAL PARKING TILES

668



MATT
300x300mm
DIGITAL PARKING TILES

669



MATT
300x300mm
DIGITAL PARKING TILES

670



MATT
300x300mm
DIGITAL PARKING TILES

671



MATT
300x300mm
DIGITAL PARKING TILES

672

Technical Specification

Sr. No.	Characteristics	EN:177B-II AIS:13755	SILVENTA VALUE
1	Deviation in Length	± 2.5%	± 0.1%
2	Deviation in Thickness	± 2.5%	± 1.0%
3	Wedging	± 1.0%	± 0.2%
4	Surface Flatness	± 1.5%	± 0.2%
5	Water Absorption	< 2.0%	< 0.5%
6	Mohs Hardness		8
7	Flexural Strength	> 20 N/mm ²	> 45 N/mm ²
8	Abrasion Resistance	< 204 mm ² (EN 176)	< 144 mm ²
9	Thermal Expansion	9x10.6 (EN 176)	6x10.6
10	Thermal Shock Resistance	No Damage	No Damage
11	Resistance to acid (Wt. Loss)	< 1.5%	< 0.4%
12	Skid Resistance (Friction coefficient)	> 0.4 (EN 176)	> 0.6
13	Breaking Strength	± 2.5%	400 Kg/cm ²
14	Stain Resistance	Resistant (EN 176)	Resistant
15	Moisture Expansion	Nil (EN 176)	Nil

Note : 1. Our conformity to the above standards is applicable only for premium quality.

Packing Detail

Sr. No.	Size	Thickness (mm) _(Approx)	Pieces Per Box	Area/Box Sq. ft.	Area/Box Sq. mt.	Wt./Box Kgs. _(Approx)
1	300mm x 300mm (12"x12")	9.00	8	7.75	0.72	13.500
1	300mm x 300mm (DG)	9.00	8	7.75	0.72	13.500
1	300mm x 300mm (DG)	9.00	8	7.75	0.72	13.500

Note :

1. Certain amount of size and shade variation is inherent in all ceramic products.
2. Our conformity to the above First is applicable only for Quality.
3. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company dose not accept responsibility once the tiles are laid.

Features :




Suitable For Floor



Frost Resistance



Anti Slip



Break Resistance



Easy To Install



Chemical Resistance



Resistance To Abrasion



Maintenance Free



Eco Friendly

FOTIATM
CERAMICA

Mfg. of Digital Parking Tiles

📍 8-A, National Highway,
B/h. Lalpar GEB, Jambudiya,
Morbi - 363 642 (Gujarat) INDIA

🌐 www.lorenatiles.com

✉ info@lorenatiles.com

THANK YOU...

