

DIGI MATT



MOTTO
FUTURE SURFACES



800X
2400MM / 15mm

EDGE PROFILE

This design has been beautifully crafted with particular attention paid to different types of edges which help to not only understand the design pattern of different areas but also satisfy the requirements of the perfect fitting.



15MM THICKNESS

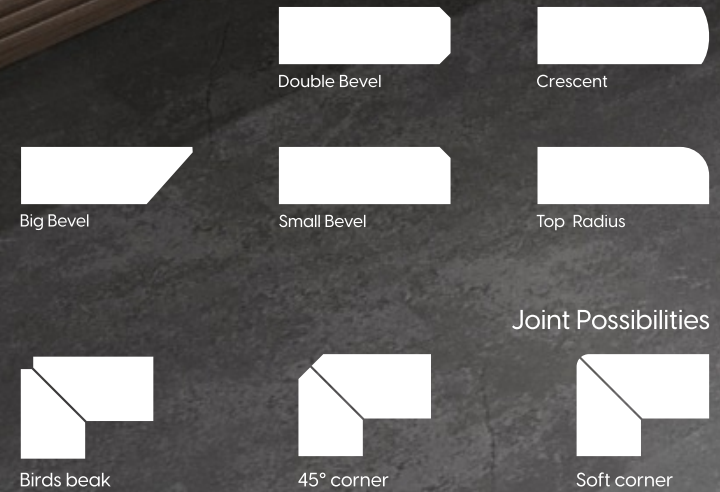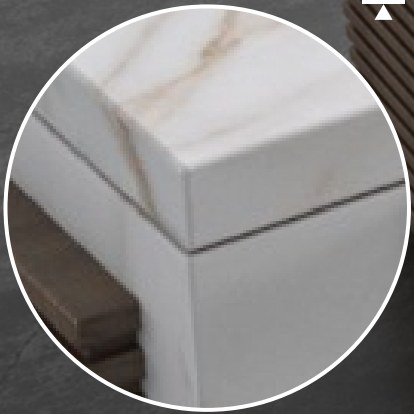



FEATURES THAT SUITS IN EVERY NEED

Since the turn of the coming decades, beauty-inspired carved tiles have established a permanent place in the industry. In addition to the features listed below, these tiles have a wide range of additional features that make them more fashionable, trending, and comfortable to use overall.

| | | | | |
|---|--|---|---|---|
|  UNALTERABLE TO UV RAYS |  FIRE RESISTANT |  IMPERVIOUS |  LIGHTNESS |  LOW ABSORPTION |
|  FROST ATTACK |  RESISTANT TO CHEMICAL ATTACK |  RESISTANT TO STAINS |  FAST ASSEMBLY |  100% RECYCLABLE |




APPROACH AREA

Incorporating the touch of luxurious comfort into your ambiance that reflects the essence of royalty while infusing the invigorating color and design that will be beautifully changing the atmosphere with the wow factor that can be used in many areas.

With all of the designs, your ambiance will be infused with luxury touches that will knock your socks off. We strive to bring you the very best of excellence for your decor, that not only enhances & enhances the best design options, but also improves the quality!

An influx of natural beauty into a space can immediately create a stunning appearance that draws attention with the addition of our collection!



kitchen



living room



dining room



lumber room



children`s room



bedroom



bathroom



lavatory



work place



garret



basement



loggia





patio



terrace



pool

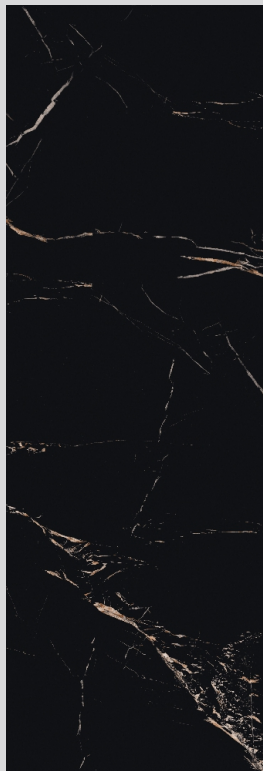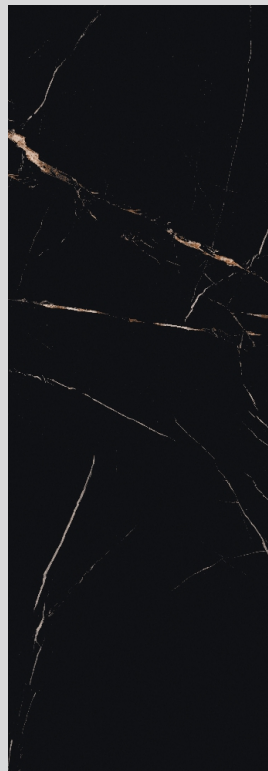

DELIGHT MARQUINA

Available size :
800x2400mm

Thickness
15mm




Finish
Digi Matt

Design
Random (3Phase)





DIGI MATT

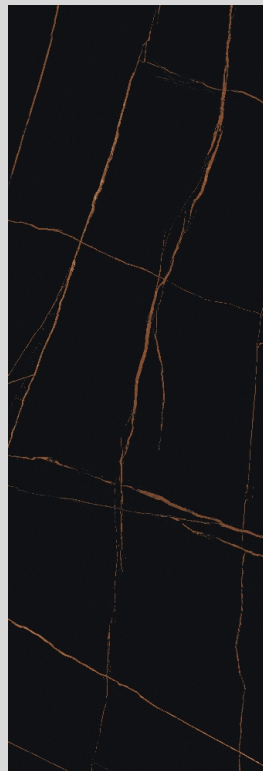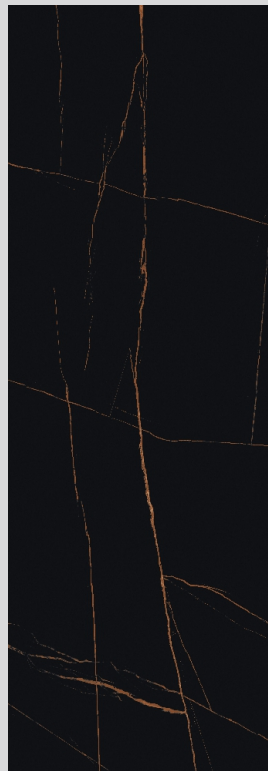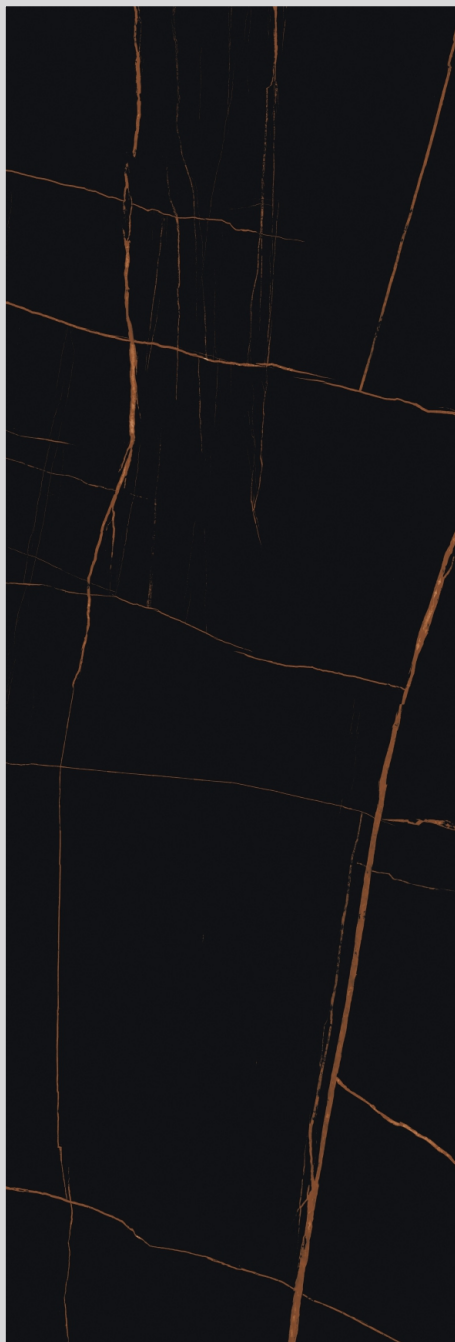

LAURENT

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (3Phase)





DIGI MATT



MAGNIFICA

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (2Phase)





KITCH
STONE



DIGI MATT



ANTIQUE GREY

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (3Phase)





EDWARDIAN
HOTELS
LONDON

DIGI MATT



PIETRA GREY

Available size :
800x2400mm

Thickness
15mm



Finish
Digi Matt

Design
Random (3Phase)





DIGI MATT

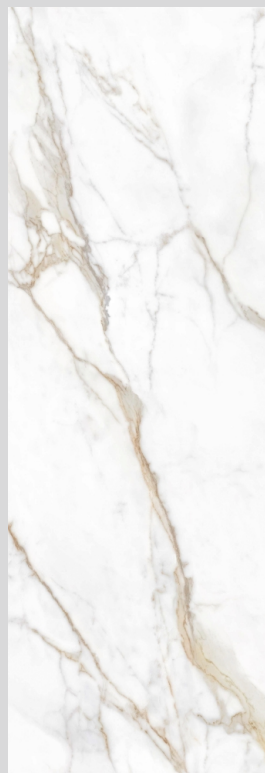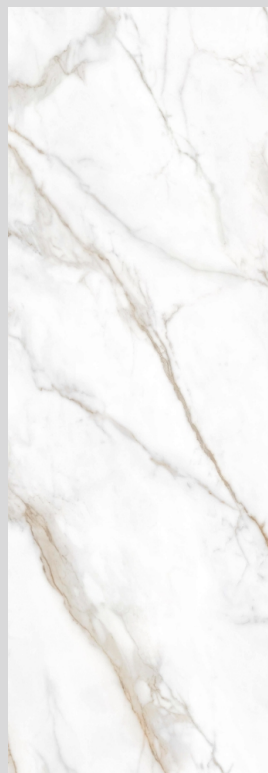

DIAMOND GOLD

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt



Design
End Less (3 Phase)





DIGI MATT



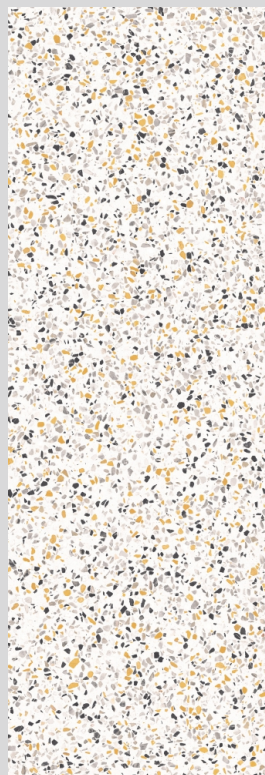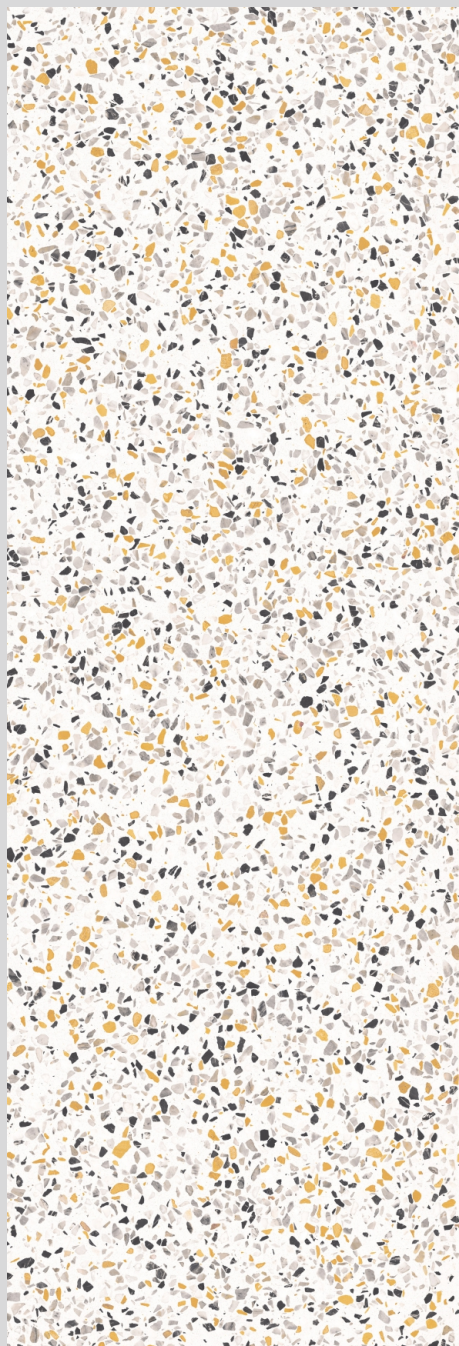

TROPICAL GLAM

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (2 Phase)







DIGI MATT



DIGI MATT

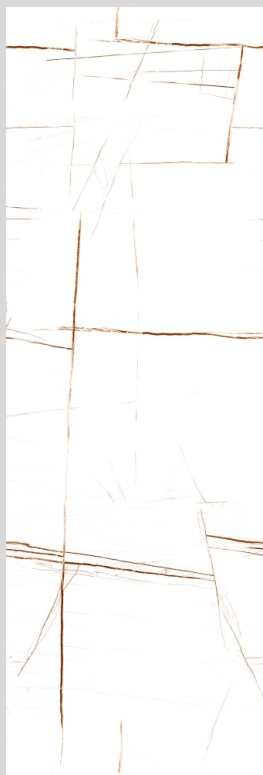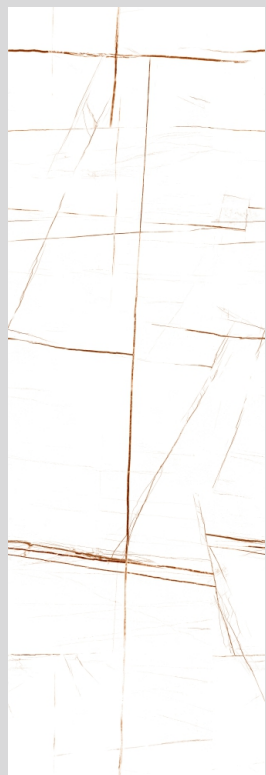

SAHARA WHITE

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt




Design
End Less (2 Phase)





DIGI MATT

DIGI MATT

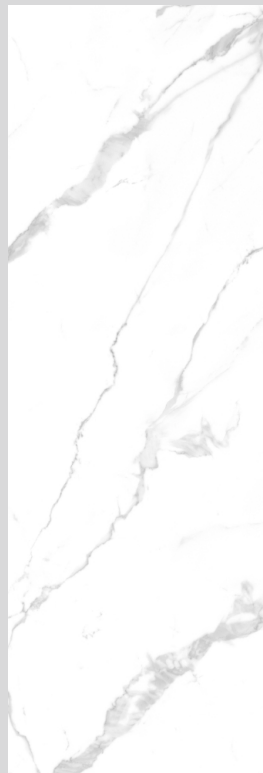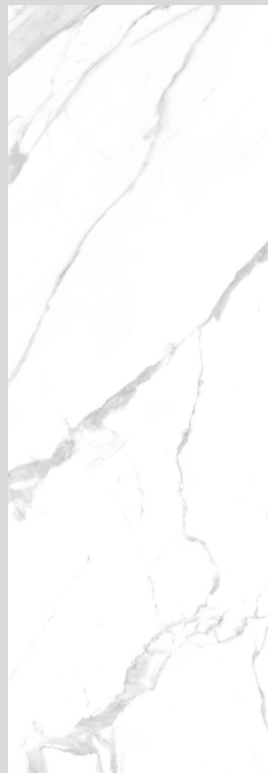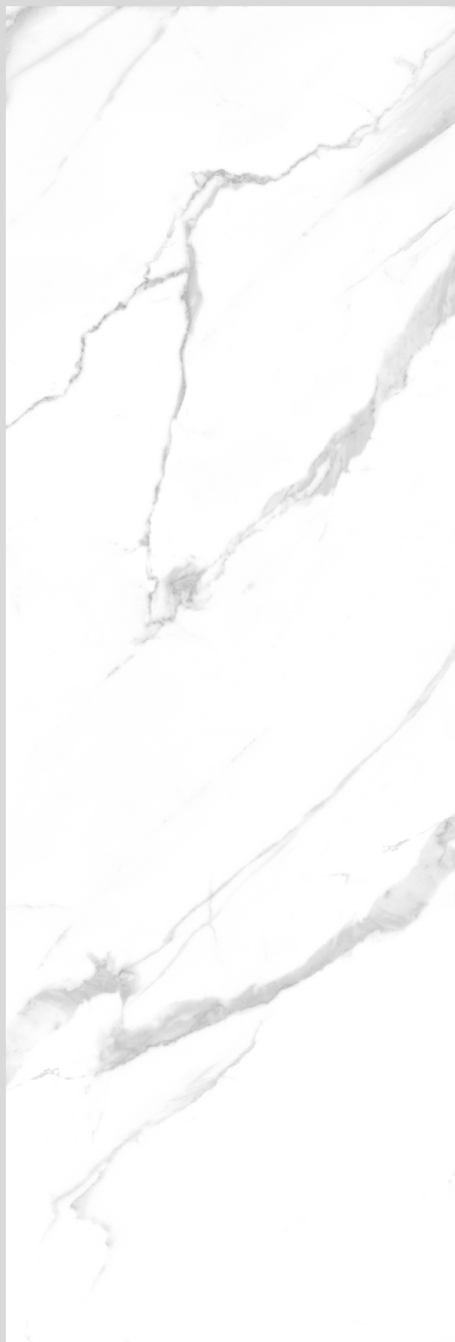

STATUARIO VOLAKAS

Available size :
800x2400mm

Thickness
15mm




Finish
Digi Matt

Design
End Less (3 Phase)





DIGI MATT

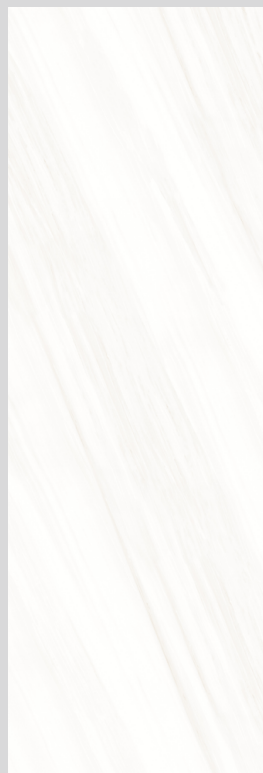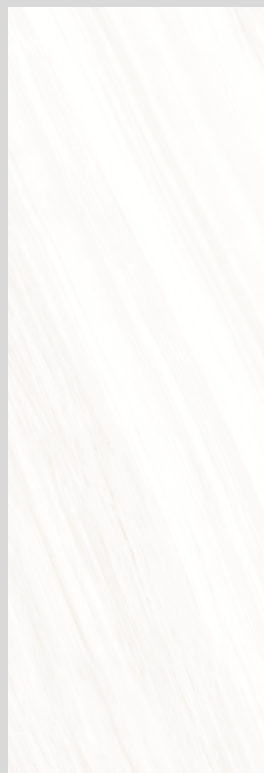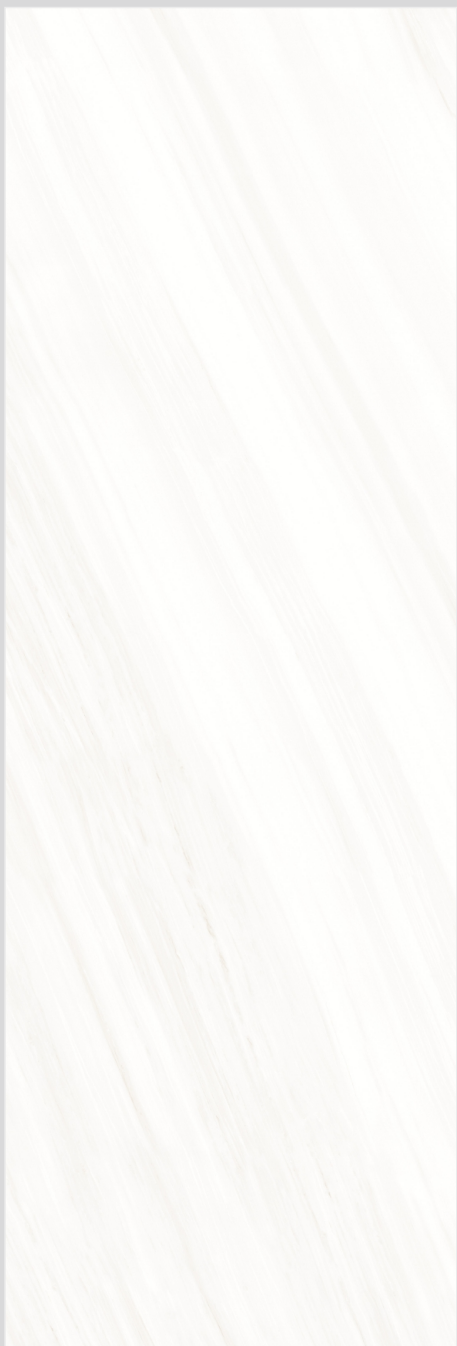

LASA BIANCO

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Random (2Phase)





DIGI MATT



TERRAZZO WHITE

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
Single Phase





DIGI MATT



SILVER SILK

Available size :
800x2400mm

Thickness
15mm

Finish
Digi Matt

Design
End Less (1 Phase)






DIGI MATT



UNIQUE DESIGNS OF 800X2400MM



You will be able to enjoy the comfort of your kitchen with the warmth of the environment that enhances the elegance of the style segment with the classic touch element. 12 different styles are available in 12 different look perspectives.

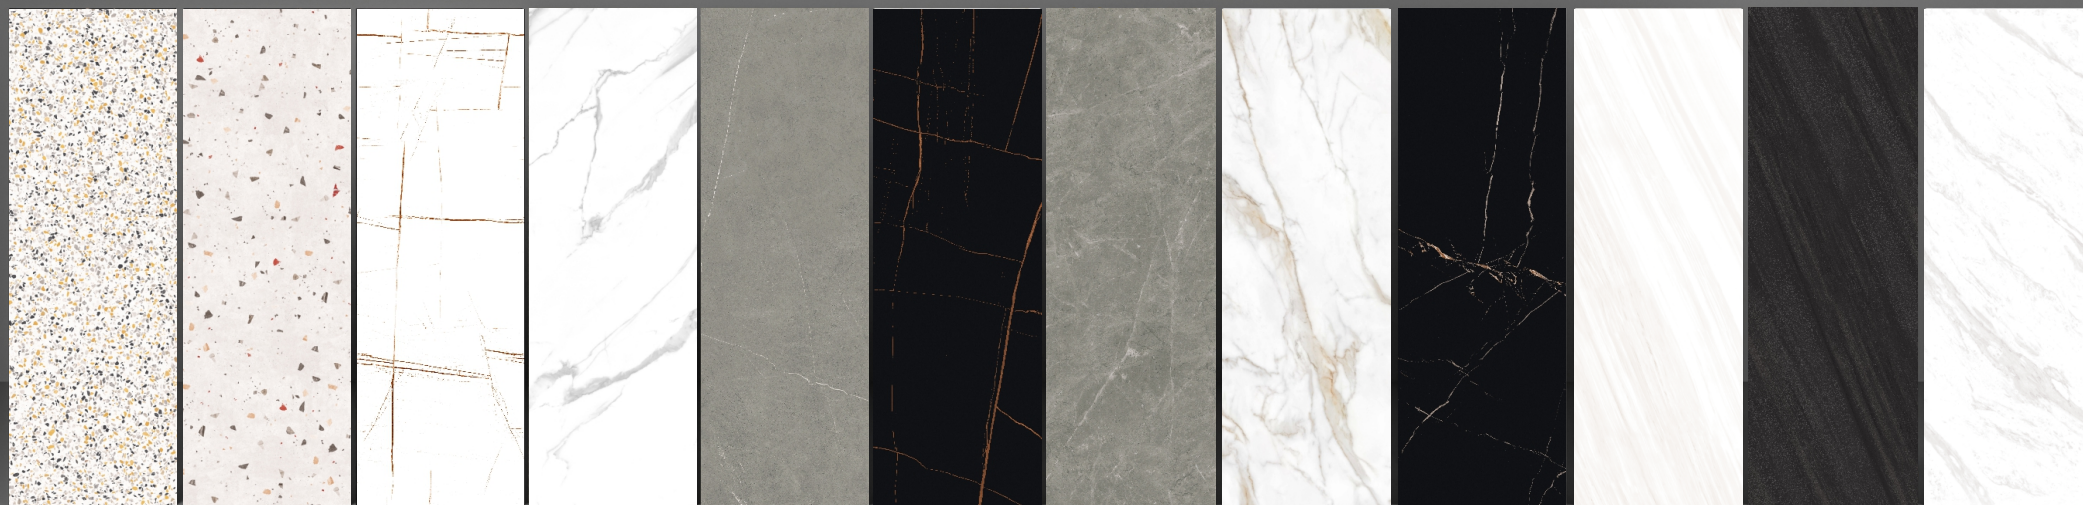


MANUALLY TRANSPORTING DIGI MATT

Only for 1/4" Slabs


MOVING A DIGI MATT

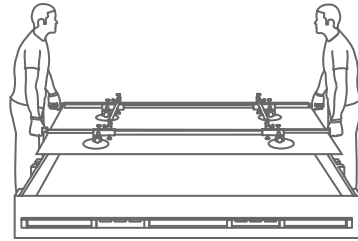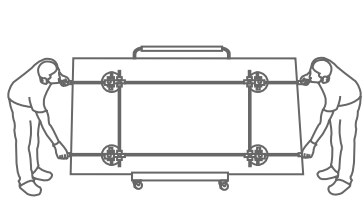

RAISING A DIGI MATT ONTO A BENCH




✗ INCORRECT




✓ CORRECT

HANDLING DIGI MATT FOR WALL

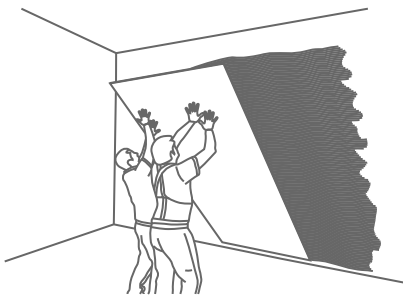


✗ INCORRECT

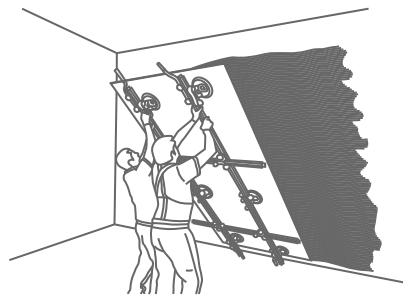

✓ CORRECT


WORKING WITH THE VARIOUS VERSIONS OF DIGI MATT

CUTTING WITH DIAMOND DISCS



Our products can be cut using diamond discs fitted onto the hand-held electrical grinding machine. The speed of Disc rotation must be high (>10000 RPM) and should have a low feed rate (< 1 m/min). It may be required to cool the disc with water. Recommended discs are the thin types generally used for cutting porcelain stoneware. The surface should be kept on a FLAT base while cutting without any gap underneath

DRILLING



You can use cutting discs fitted to battery-operated screwdrivers or angle grinders, electrical drills as an alternative.



INTERNAL CUT / L-SHAPED CUT



To get internal and L-shaped corners & to reduce the risk of breakage, round the vertex of the internal corner using bits with a radius of at least 5mm. Then cut with diamond discs, be cautious to stop moving the cutting tool forward. To drill and cut using diamond discs, follow the instructions provided above.

When using these tools:
 -Cool the point being drilled with water
 -Don't put too much pressure and bear in mind the resistance of the type of laminated stoneware you are working on
 -If you are using tungsten bits, start drilling at a low speed
 -If you are using drills or screwdrivers, do not select hammering mode

EDGE-FINISHING

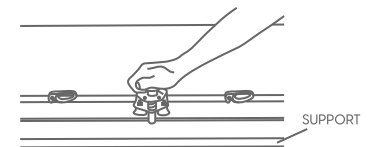

SUPPORT



CLEANING & MAINTENCE

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

| TYPE OF STAIN | CHEMICAL PRODUCT | EXAMPLE |
|---------------|--------------------|--|
| Grease | Alkaline - Solvent | Detergent |
| Oil | Solvent | Ammonia, Backing Soda |
| Ink | Oxidant - Solvent | Alcohol, Liquid Bleach, Nail Paint Remover |
| Rust | Acid | Hydrochloric Acid, Vinegar, Red Harpic |
| Lime | Acid | Descaling Reagent, Hydro Chloric Acid |
| Cement | Acid | Hydro Chloric Acid |
| Wine | Alkaline | Ammonia, Liquid Bleach |
| Coffee | Alkaline - Solvent | Ammonia, Liquid Bleach |
| Rubber | Solvent | Alcohol, Thinner |
| Plaster | Acid | Hydro Chloric Acid |
| Candle Wax | Solvent | Alcohol, Thinner |
| Iodine | Oxidant | Liquid Bleach |
| Blood | Oxidant | Liquid Bleach |
| Ice Cream | Alkaline | Liquid Bleach |

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

TECHNICAL SPECIFICATION

| CHARACTERISTIC | STANDARD AS PER ISO-13006/2018 En14411 gr.bla | MOTTO VALUE | TEST METHOD |
|--------------------------------------|---|---------------------------|--------------|
| Regulatory Properties | | | |
| Deviation in Length & Width | ±0.5% | ±0.2% | ISO 10545-2 |
| Deviation in Thickness | ±5% | ±5% | ISO 10545-2 |
| Straightness of Sides | ±0.5% | ±0.2% | ISO 10545-2 |
| Rectangularity | ±0.5% | ±0.2% | ISO 10545-2 |
| Surface Flatness | ±0.5% | ±0.3% | ISO 10545-2 |
| Colour Difference | ΔE<1.00 | ΔE<0.30 | ISO 10545-16 |
| Glossiness | As per Mfg. | As per Mfg. | Gloss Meter |
| Structural Properties | | | |
| Water Absorption | ≤0.5 % | ≤0.3 % | ISO 10545-3 |
| Apparent Density | As Per Mfg. | >2.20 g/cc | ISO 10545-3 |
| Massive Mechanical Properties | | | |
| Modulus of Repture | Min.35N/mm ² | Min.40N/mm ² | ISO 10545-4 |
| Breaking Strength | Min. 1300 N | Min. 5000 N | ISO 10545-4 |
| Impact Resistance | As per Mfg. | Min. 0.55 | ISO 10545-4 |
| Surface Mechanical Properties | | | |
| Surface Abrasion Resistance | As per Mfg. | Min. class 3 | ISO 10545-7 |
| Moh's Hardness | As per Mfg. | Min. class 4 | BS EN 15771 |
| Thermo Hygrometric Properties | | | |
| Frost Resistance | As Per Mfg. | Frost Proof | ISO 10545-12 |
| Thermal Shock Resistance | Min. 10 Cycle | Min. 10 Cycle | ISO 10545-9 |
| Moisture Expansion | Max. 0.6mm/m | Max. 0.02mm/m | ISO 10545-10 |
| Thermal Expansion | Max. 9.0 x 10 ⁻⁶ | Max. 6.0x10 ⁻⁶ | ISO 10545-8 |
| Chemical Properties | | | |
| Chemical Resistance | As Per Mfg. | No Damage | ISO 10545-13 |
| Stain Resistance | Resistant | Resistant | ISO 10545-14 |
| Safety Properties | | | |
| Slip Resistance | As per Mfg. | N. A. | DIN 51130 |
| Fire Resistance | As per Mfg. | Fire Proof | N. A. |

PACKING DETAILS

| DIMENSION (mm) | No of PC's/Box | SQUARE FEET | WEIGHT (APPROX) |
|------------------|----------------|-------------|-------------------|
| 800x2400mm | 1 | 20.66 | 68 Kgs |

Take note : Please follow the Company's guidelines for cutting and applying tiles. This will ensure quality and remarkable results.



MOTTO STONE PVT LTD .

8-A N.H., Sartanpar Road, At, Sartanpar,
Ta. Wakaner, Morbi - 363 621, Gujarat, INDIA.

E-mail : info@mottogroup.in | www.mottogroup.in

Toll-free Number : 1800 123 2124 | +91 95123 80072